



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)


SPECrate®2017_int_base = 1530

Invento i6000 EPYC (AMD EPYC 9654)

SPECrate®2017_int_peak = 1550

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Jan-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

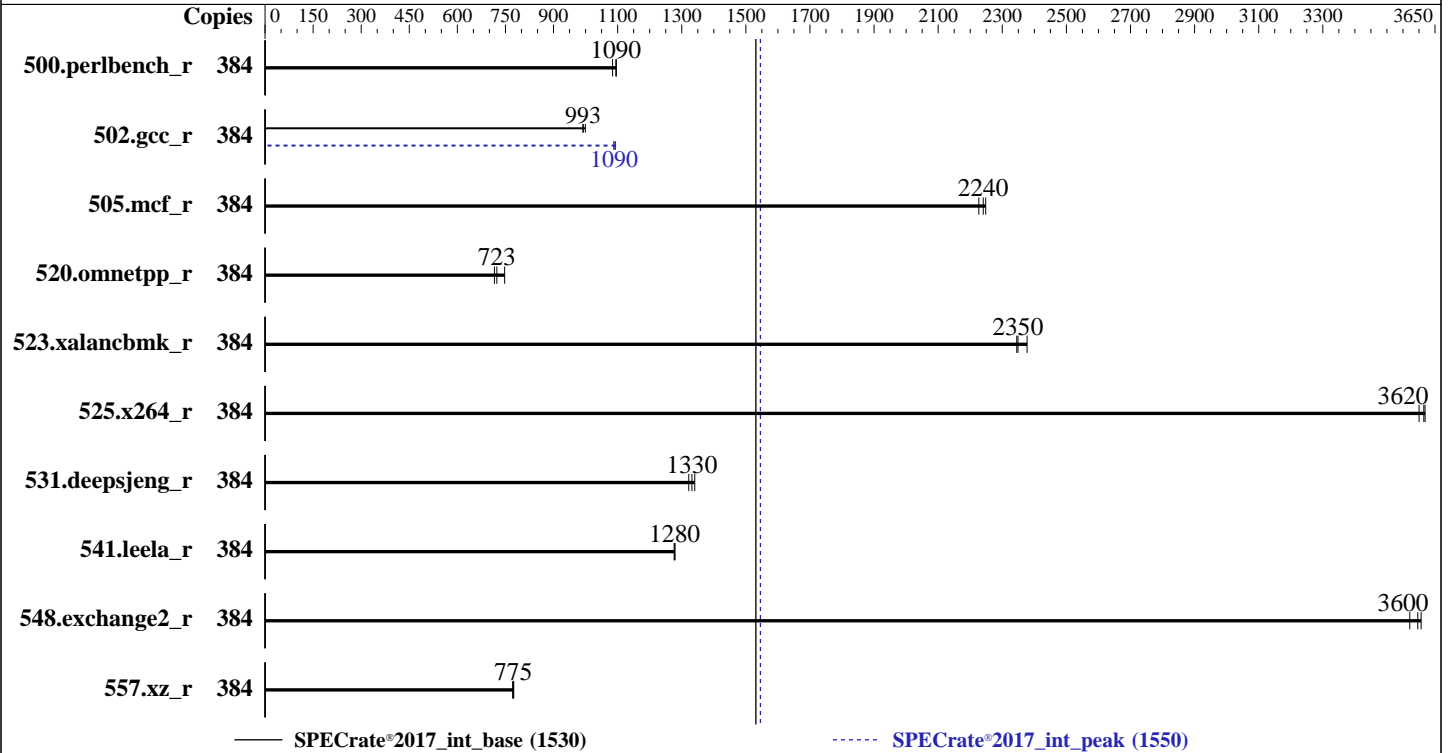

Hardware

CPU Name: AMD EPYC 9654
 Max MHz: 3700
 Nominal: 2400
 Enabled: 192 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 384 MB I+D on chip per chip, 32 MB shared / 8 cores
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC5-5600B-R, running at 4800)
 Storage: 960 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: Ubuntu 22.04.5 LTS
 kernel version 6.8.0-51-generic
 C/C++/Fortran: Version 5.0.0 of AOCC
 Compiler: No
 Parallel: Version 5.27 released Nov-2024
 Firmware: ext4
 File System: Run level 5 (multi-user)
 System State: 64-bit
 Base Pointers: 32/64-bit
 Peak Pointers: None
 Other: OS set to prefer performance at the expense of additional power usage
 Power Management:



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_int_base = 1530

Invento i6000 EPYC (AMD EPYC 9654)

SPECrate®2017_int_peak = 1550

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Jan-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	384	558	1100	559	1090	564	1080	384	558	1100	559	1090	564	1080
502.gcc_r	384	548	992	548	993	544	999	384	500	1090	499	1090	497	1090
505.mcf_r	384	276	2250	279	2230	277	2240	384	276	2250	279	2230	277	2240
520.omnetpp_r	384	674	748	704	716	697	723	384	674	748	704	716	697	723
523.xalancbmk_r	384	173	2350	171	2380	173	2350	384	173	2350	171	2380	173	2350
525.x264_r	384	186	3620	186	3620	187	3600	384	186	3620	186	3620	187	3600
531.deepsjeng_r	384	328	1340	333	1320	330	1330	384	328	1340	333	1320	330	1330
541.leela_r	384	498	1280	497	1280	498	1280	384	498	1280	497	1280	498	1280
548.exchange2_r	384	280	3600	279	3610	282	3570	384	280	3600	279	3610	282	3570
557.xz_r	384	537	772	535	775	535	776	384	537	772	535	775	535	776

SPECrate®2017_int_base = **1530**

SPECrate®2017_int_peak = **1550**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_int_base = 1530

Invento i6000 EPYC (AMD EPYC 9654)

SPECrate®2017_int_peak = 1550

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Jan-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/speccpu/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/speccpu/cpu2017/amd_rate_aocc500_znver5
_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

Platform Notes

Sysinfo program /home/speccpu/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on AMD Tue Jan 21 14:29:56 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux AMD 6.8.0-51-generic #52-22.04.1-Ubuntu SMP PREEMPT_DYNAMIC Mon Dec 9 15:00:52 UTC 2 x86_64 x86_64
x86_64 GNU/Linux

2. w
14:29:56 up 1:15, 2 users, load average: 0.32, 0.21, 0.10
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
test :1 :1 13:15 ?xdm? 18:52 0.00s /usr/libexec/gdm-x-session --run-script env
GNOME_SHELL_SESSION_MODE=ubuntu /usr/bin/gnome-session --session=ubuntu

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_int_base = 1530

Invento i6000 EPYC (AMD EPYC 9654)

SPECrate®2017_int_peak = 1550

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Jan-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Platform Notes (Continued)

```
test pts/1 - 14:29 20.00s 1.95s 0.02s sudo -s
```

3. Username

```
From environment variable $USER: root
From the command 'logname': test
```

4. ulimit -a

```
time(seconds) unlimited
file(blocks) unlimited
data(kbytes) unlimited
stack(kbytes) unlimited
coredump(blocks) 0
memory(kbytes) unlimited
locked memory(kbytes) 2097152
process 3093863
nofiles 1024
vmemory(kbytes) unlimited
locks unlimited
rtprio 0
```

5. sysinfo process ancestry

```
/sbin/init splash
/lib/systemd/systemd --user
/usr/libexec/gnome-terminal-server
bash
sudo -s
sudo -s
/bin/bash
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu/cpu2017
```

6. /proc/cpuinfo

```
model name : AMD EPYC 9654 96-Core Processor
vendor_id : AuthenticAMD
cpu family : 25
model : 17
stepping : 1
microcode : 0xa101148
bugs : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srs0
TLB size : 3584 4K pages
cpu cores : 96
siblings : 192
2 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-95
physical id 1: core ids 0-95
physical id 0: apicids 0-191
physical id 1: apicids 256-447
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_int_base = 1530

Invento i6000 EPYC (AMD EPYC 9654)

SPECrate®2017_int_peak = 1550

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Jan-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                384
On-line CPU(s) list:   0-383
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 9654 96-Core Processor
CPU family:            25
Model:                 17
Thread(s) per core:    2
Core(s) per socket:    96
Socket(s):             2
Stepping:              1
Frequency boost:       enabled
CPU max MHz:           3707.8120
CPU min MHz:           1500.0000
BogoMIPS:              4799.63
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpxct
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
flushbyasid decodeassists pausefilter pfthreshold avic
v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
debug_swap
Virtualization:        AMD-V
L1d cache:             6 MiB (192 instances)
L1i cache:             6 MiB (192 instances)
L2 cache:              192 MiB (192 instances)
L3 cache:              768 MiB (24 instances)
NUMA node(s):          2
NUMA node0 CPU(s):    0-95,192-287
NUMA node1 CPU(s):    96-191,288-383
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:                Not affected
Vulnerability Mds:                 Not affected
Vulnerability Meltdown:            Not affected
Vulnerability Mmio stale data:     Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:            Not affected
Vulnerability Spec rstack overflow: Mitigation; Safe RET
Vulnerability Spec store bypass:   Mitigation; Speculative Store Bypass disabled via prctl

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_int_base = 1530

Invento i6000 EPYC (AMD EPYC 9654)

SPECrate®2017_int_peak = 1550

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Jan-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Platform Notes (Continued)

Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBR SB-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	6M	8	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	1M	192M	8	Unified	2	2048	1	64
L3	32M	768M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-95,192-287
node 0 size: 386596 MB
node 0 free: 382597 MB
node 1 cpus: 96-191,288-383
node 1 size: 386945 MB
node 1 free: 384070 MB
node distances:
node  0  1
  0: 10  32
  1: 32  10
```

9. /proc/meminfo

```
MemTotal: 792106932 kB
```

10. who -r

```
run-level 5 Jan 21 12:48
```

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)

```
Default Target Status
graphical running
```

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon anacron anydesk apparmor avahi-daemon bluetooth console-setup cron cups cups-browsed dmesg e2scrub_reap getty@ gpu-manager grub-common grub-initrd-fallback irqbalance kerneloops keyboard-setup networkd-dispatcher openvpn power-profiles-daemon rsyslog secureboot-db setvtrgb snapd ssh switcheroo-control systemd-oom systemd-pstore systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades wpa_supplicant
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	acpid brltty console-getty debug-shell ipmievd nftables openvpn-client@ openvpn-server@ openvpn@ rsync rtkit-daemon serial-getty@ speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-networkd systemd-networkd-wait-online systemd-sysextd systemd-time-wait-sync upower wpa_supplicant-nl80211@ wpa_supplicant-wired@ wpa_supplicant@
generated	apport openipmi speech-dispatcher
indirect	saned@ spice-vdagentd uidd
masked	alsa-utils cryptdisks cryptdisks-early hwclock pulseaudio-enable-autospawn rc rcS saned

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_int_base = 1530

Invento i6000 EPYC (AMD EPYC 9654)

SPECrate®2017_int_peak = 1550

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Jan-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Platform Notes (Continued)

screen-cleanup sudo x11-common

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.8.0-51-generic
root=UUID=e953dd87-e49e-4230-a412-5a6320fe39a0
ro
quiet
splash
vt.handoff=7
```

14. cpupower frequency-info

```
analyzing CPU 173:
  current policy: frequency should be within 1.50 GHz and 2.40 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
    Pstate-P0: 2400MHz
```

15. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                  1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

16. /sys/kernel/mm/transparent_hugepage

```
defrag          [always] defer defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

17. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_int_base = 1530

Invento i6000 EPYC (AMD EPYC 9654)

SPECrate®2017_int_peak = 1550

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Jan-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Platform Notes (Continued)

pages_to_scan 4096
scan_sleep_millisecs 10000

18. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.5 LTS

19. Disk information
SPEC is set to: /home/speccpu/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 ext4 879G 35G 800G 5% /

20. /sys/devices/virtual/dmi/id
Vendor: FusionStor
Product: Fusionstor_Invento_i6000_EPYC_Series
Product Family: Server
Serial: GNG6PB312A0006

21. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
24x Samsung M321R4GA3PB0-CWMKJ 32 GB 2 rank 5600, configured at 4800

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: FUSIONSTOR
BIOS Version: F18
BIOS Date: 10/11/2024
BIOS Revision: 5.27

Compiler Version Notes

=====
C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_int_base = 1530

Invento i6000 EPYC (AMD EPYC 9654)

SPECrate®2017_int_peak = 1550

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Jan-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Compiler Version Notes (Continued)

=====
C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
541.leela_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran | 548.exchange2_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

SPECrate®2017_int_base = 1530

Invento i6000 EPYC (AMD EPYC 9654)

SPECrate®2017_int_peak = 1550

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Jan-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_int_base = 1530

Invento i6000 EPYC (AMD EPYC 9654)

SPECrate®2017_int_peak = 1550

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Jan-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_int_base = 1530

Invento i6000 EPYC (AMD EPYC 9654)

SPECrate®2017_int_peak = 1550

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Jan-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Peak Optimization Flags (Continued)

```
502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc
```

505.mcf_r: basepeak = yes

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_int_base = 1530

Invento i6000 EPYC (AMD EPYC 9654)

SPECrate®2017_int_peak = 1550

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Jan-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

The flags files that were used to format this result can be browsed at
<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>
<http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-AMD-rev1.html>

You can also download the XML flags sources by saving the following links:
<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>
<http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-AMD-rev1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-01-21 03:59:55-0500.
Report generated on 2025-03-12 10:24:26 by CPU2017 PDF formatter v6716.
Originally published on 2025-03-11.