



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)


SPECspeed®2017\_int\_base = 14.1

**Invento i6000 EPYC (AMD EPYC 9654)**

SPECspeed®2017\_int\_peak = 14.3

**CPU2017 License:** 6621  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Jan-2025  
**Hardware Availability:** Oct-2024  
**Software Availability:** Oct-2024

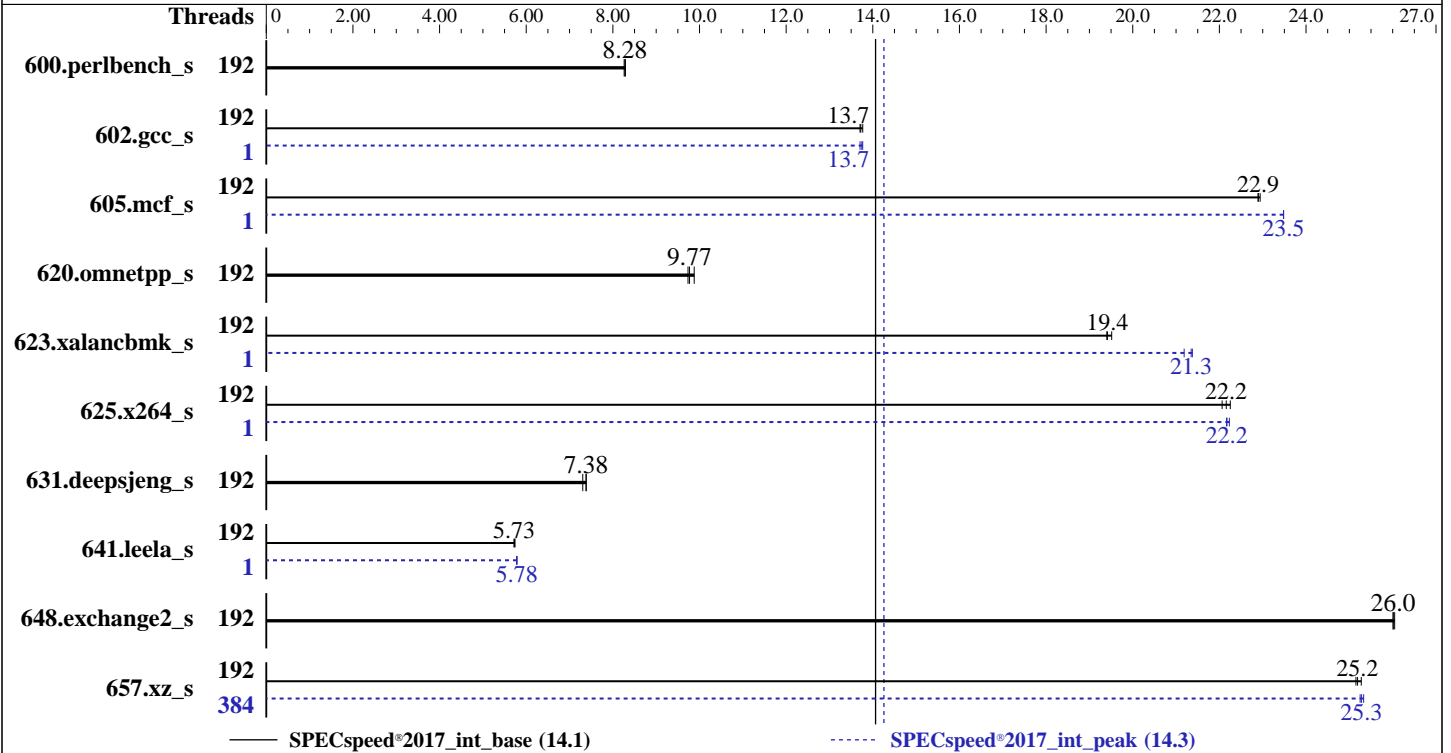

## Hardware

CPU Name: AMD EPYC 9654  
 Max MHz: 3700  
 Nominal: 2400  
 Enabled: 192 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 384 MB I+D on chip per chip, 32 MB shared / 8 cores  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC5-5600B-R, running at 4800)  
 Storage: 960 GB SATA SSD  
 Other: CPU Cooling: Air

## Software

OS: Ubuntu 22.04.5 LTS  
 kernel version 6.8.0-51-generic  
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Version 5.27 released Nov-2024  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: OS set to prefer performance at the expense of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

SPECSpeed®2017\_int\_base = 14.1

**Invento i6000 EPYC (AMD EPYC 9654)**

SPECSpeed®2017\_int\_peak = 14.3

**CPU2017 License:** 6621  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Jan-2025  
**Hardware Availability:** Oct-2024  
**Software Availability:** Oct-2024

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	192	<b>214</b>	<b>8.28</b>	214	8.29	215	8.26	192	<b>214</b>	<b>8.28</b>	214	8.29	215	8.26
602.gcc_s	192	289	13.8	291	13.7	<b>290</b>	<b>13.7</b>	1	289	13.8	291	13.7	<b>290</b>	<b>13.7</b>
605.mcf_s	192	206	22.9	<b>206</b>	<b>22.9</b>	206	22.9	1	201	23.5	201	23.5	<b>201</b>	<b>23.5</b>
620.omnetpp_s	192	168	9.73	165	9.88	<b>167</b>	<b>9.77</b>	192	168	9.73	165	9.88	<b>167</b>	<b>9.77</b>
623.xalancbmk_s	192	72.6	19.5	73.0	19.4	<b>73.0</b>	<b>19.4</b>	1	66.9	21.2	66.3	21.4	<b>66.4</b>	<b>21.3</b>
625.x264_s	192	80.0	22.1	79.3	22.3	<b>79.6</b>	<b>22.2</b>	1	<b>79.5</b>	<b>22.2</b>	79.4	22.2	79.6	22.2
631.deepsjeng_s	192	194	7.39	<b>194</b>	<b>7.38</b>	196	7.31	192	194	7.39	<b>194</b>	<b>7.38</b>	196	7.31
641.leela_s	192	298	5.72	297	5.74	<b>298</b>	<b>5.73</b>	1	295	5.79	<b>295</b>	<b>5.78</b>	295	5.78
648.exchange2_s	192	113	26.0	<b>113</b>	<b>26.0</b>	113	26.0	192	113	26.0	<b>113</b>	<b>26.0</b>	113	26.0
657.xz_s	192	<b>245</b>	<b>25.2</b>	245	25.3	246	25.2	384	245	25.2	<b>245</b>	<b>25.3</b>	244	25.3

SPECSpeed®2017\_int\_base = **14.1**

SPECSpeed®2017\_int\_peak = **14.3**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

SPECspeed®2017\_int\_base = 14.1

**Invento i6000 EPYC (AMD EPYC 9654)**

SPECspeed®2017\_int\_peak = 14.3

**CPU2017 License:** 6621  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Jan-2025  
**Hardware Availability:** Oct-2024  
**Software Availability:** Oct-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-383"
LD_LIBRARY_PATH =
"/home/speccpu/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/speccpu/cpu2017/amd_speed_aocc500_znve
r5_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "384"
```

Environment variables set by runcpu during the 602.gcc\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 605.mcf\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 625.x264\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 641.leela\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 657.xz\_s peak run:

```
GOMP_CPU_AFFINITY = "0-383"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

## Platform Notes

```
Sysinfo program /home/speccpu/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on AMD Wed Jan 22 11:50:40 2025
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

SPECspeed®2017\_int\_base = 14.1

**Invento i6000 EPYC (AMD EPYC 9654)**

SPECspeed®2017\_int\_peak = 14.3

**CPU2017 License:** 6621  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Jan-2025  
**Hardware Availability:** Oct-2024  
**Software Availability:** Oct-2024

## Platform Notes (Continued)

- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. systemctl
- 16. /sys/kernel/mm/transparent\_hugepage
- 17. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
-----
1. uname -a
Linux AMD 6.8.0-51-generic #52~22.04.1-Ubuntu SMP PREEMPT_DYNAMIC Mon Dec 9 15:00:52 UTC 2 x86_64 x86_64
x86_64 GNU/Linux
```

```
-----
2. w
11:50:40 up 22:36, 2 users, load average: 0.74, 1.14, 18.10
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU   WHAT
test      :1       :1              Tue13    ?xdm? 33:30m 0.00s /usr/libexec/gdm-x-session --run-script env
GNOME_SHELL_SESSION_MODE=ubuntu /usr/bin/gnome-session --session=ubuntu
test      pts/1   -               Tue14    24.00s 2.30s 0.23s sudo -s
```

```
-----
3. Username
From environment variable $USER:  root
From the command 'logname':      test
```

```
-----
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            3093863
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
```

```
-----
5. sysinfo process ancestry
/sbin/init splash
/lib/systemd/systemd --user
/usr/libexec/gnome-terminal-server
bash
sudo -s
sudo -s
/bin/bash
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

SPECspeed®2017\_int\_base = 14.1

**Invento i6000 EPYC (AMD EPYC 9654)**

SPECspeed®2017\_int\_peak = 14.3

**CPU2017 License:** 6621  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Jan-2025  
**Hardware Availability:** Oct-2024  
**Software Availability:** Oct-2024

## Platform Notes (Continued)

```
$SPEC/tmp/CPU2017.001/temlogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu/cpu2017
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 9654 96-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa101148
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass rsro
TLB size       : 3584 4K pages
cpu cores      : 96
siblings       : 192
2 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-95
physical id 1: core ids 0-95
physical id 0: apicids 0-191
physical id 1: apicids 256-447
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

```
From lscpu from util-linux 2.37.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                384
On-line CPU(s) list:  0-383
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 9654 96-Core Processor
CPU family:            25
Model:                 17
Thread(s) per core:    2
Core(s) per socket:    96
Socket(s):              2
Stepping:              1
Frequency boost:       enabled
CPU max MHz:           3707.8120
CPU min MHz:           1500.0000
BogoMIPS:              4799.63
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtsmp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

SPECspeed®2017\_int\_base = 14.1

**Invento i6000 EPYC (AMD EPYC 9654)**

SPECspeed®2017\_int\_peak = 14.3

**CPU2017 License:** 6621  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Jan-2025  
**Hardware Availability:** Oct-2024  
**Software Availability:** Oct-2024

## Platform Notes (Continued)

```
amd_ppin cpcp arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
flushbyasid decodeassists pausefilter pfthreshold avic
v_vmssave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
debug_swap
```

```
Virtualization:
AMD-V
L1d cache: 6 MiB (192 instances)
L1i cache: 6 MiB (192 instances)
L2 cache: 192 MiB (192 instances)
L3 cache: 768 MiB (24 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-95,192-287
NUMA node1 CPU(s): 96-191,288-383
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Mitigation; Safe RET
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

```
From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d 32K 6M 8 Data 1 64 1 64
L1i 32K 6M 8 Instruction 1 64 1 64
L2 1M 192M 8 Unified 2 2048 1 64
L3 32M 768M 16 Unified 3 32768 1 64
```

```
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0-95,192-287
node 0 size: 386596 MB
node 0 free: 382555 MB
node 1 cpus: 96-191,288-383
node 1 size: 386945 MB
node 1 free: 383774 MB
node distances:
node 0 1
0: 10 32
1: 32 10
```

```
9. /proc/meminfo
MemTotal: 792106932 kB
```

```
10. who -r
run-level 5 Jan 21 12:48
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

SPECspeed®2017\_int\_base = 14.1

**Invento i6000 EPYC (AMD EPYC 9654)**

SPECspeed®2017\_int\_peak = 14.3

**CPU2017 License:** 6621  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Jan-2025  
**Hardware Availability:** Oct-2024  
**Software Availability:** Oct-2024

## Platform Notes (Continued)

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)  
Default Target Status  
graphical running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon anacron anydesk apparmor avahi-daemon bluetooth console-setup cron cups cups-browsed dmesg e2scrub_reap getty@ gpu-manager grub-common grub-initrd-fallback irqbalance kerneloops keyboard-setup networkd-dispatcher openvpn power-profiles-daemon rsyslog secureboot-db setvtrgb snapd ssh switcheroo-control systemd-oom systemd-pstore systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades wpa_supplicant
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	acpid brltty console-getty debug-shell ipmievd nftables openvpn-client@ openvpn-server@ openvpn@ rsync rtkit-daemon serial-getty@ speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-networkd systemd-networkd-wait-online systemd-sysext systemd-time-wait-sync upower wpa_supplicant-nl80211@ wpa_supplicant-wired@ wpa_supplicant@
generated	apport openipmi speech-dispatcher
indirect	saned@ spice-vdagentd uidd
masked	alsa-utils cryptdisks cryptdisks-early hwclock pulseaudio-enable-autospawn rc rcS saned screen-cleanup sudo x11-common

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-6.8.0-51-generic  
root=UUID=e953dd87-e49e-4230-a412-5a6320fe39a0  
ro  
quiet  
splash  
vt.handoff=7

14. cpupower frequency-info  
analyzing CPU 250:  
current policy: frequency should be within 1.50 GHz and 2.40 GHz.  
The governor "performance" may decide which speed to use within this range.  
boost state support:  
Supported: yes  
Active: yes  
Boost States: 0  
Total States: 3  
Pstate-P0: 2400MHz

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

SPECspeed®2017\_int\_base = 14.1

**Invento i6000 EPYC (AMD EPYC 9654)**

SPECspeed®2017\_int\_peak = 14.3

**CPU2017 License:** 6621  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Jan-2025  
**Hardware Availability:** Oct-2024  
**Software Availability:** Oct-2024

## Platform Notes (Continued)

```

vm.extfrag_threshold          500
vm.min_unmapped_ratio        1
vm.nr_hugepages               0
vm.nr_hugepages_mempolicy    0
vm.nr_overcommit_hugepages   0
vm.swappiness                 1
vm.watermark_boost_factor    15000
vm.watermark_scale_factor    10
vm.zone_reclaim_mode         1

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.5 LTS

```

```

-----
19. Disk information
SPEC is set to: /home/speccpu/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 ext4 879G 35G 800G 5% /

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor: FusionStor
Product: Fusionstor_Invento_i6000_EPYC_Series
Product Family: Server
Serial: GNG6PB312A0006

```

```

-----
21. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
24x Samsung M321R4GA3PB0-CWMKJ 32 GB 2 rank 5600, configured at 4800

```

```

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: FUSIONSTOR
BIOS Version: F18

```

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

SPECspeed®2017\_int\_base = 14.1

**Invento i6000 EPYC (AMD EPYC 9654)**

SPECspeed®2017\_int\_peak = 14.3

**CPU2017 License:** 6621  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Jan-2025  
**Hardware Availability:** Oct-2024  
**Software Availability:** Oct-2024

## Platform Notes (Continued)

BIOS Date: 10/11/2024  
BIOS Revision: 5.27

## Compiler Version Notes

=====  
C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)  
| 657.xz\_s(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
| 641.leela\_s(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

=====  
Fortran | 648.exchange2\_s(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

## Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
602.gcc\_s: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fusionstor**

(Test Sponsor: Meganet)

SPECspeed®2017\_int\_base = 14.1

**Invento i6000 EPYC (AMD EPYC 9654)**

SPECspeed®2017\_int\_peak = 14.3

**CPU2017 License:** 6621

**Test Sponsor:** Meganet

**Tested by:** Fusionstor system

**Test Date:** Jan-2025

**Hardware Availability:** Oct-2024

**Software Availability:** Oct-2024

## Base Portability Flags (Continued)

```
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

SPECspeed®2017\_int\_base = 14.1

**Invento i6000 EPYC (AMD EPYC 9654)**

SPECspeed®2017\_int\_peak = 14.3

**CPU2017 License:** 6621  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Jan-2025  
**Hardware Availability:** Oct-2024  
**Software Availability:** Oct-2024

## Base Other Flags

C benchmarks:  
-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:  
-Wno-unused-command-line-argument

Fortran benchmarks:  
-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: basepeak = yes

602.gcc\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-allow-multiple-definition  
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto  
-DSPEC\_OPENMP -fremap-arrays -fstrip-mining  
-fstruct-layout=9 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

SPECspeed®2017\_int\_base = 14.1

**Invento i6000 EPYC (AMD EPYC 9654)**

SPECspeed®2017\_int\_peak = 14.3

**CPU2017 License:** 6621  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Jan-2025  
**Hardware Availability:** Oct-2024  
**Software Availability:** Oct-2024

## Peak Optimization Flags (Continued)

```
605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

625.x264\_s: Same as 602.gcc\_s

657.xz\_s: Same as 602.gcc\_s

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

```
623.xalancbmk_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlibm -lamdalloc-ext -lflang
```

631.deepsjeng\_s: basepeak = yes

```
641.leela_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

648.exchange2\_s: basepeak = yes



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Fusionstor**  
(Test Sponsor: Meganet)

SPECspeed®2017\_int\_base = 14.1

**Invento i6000 EPYC (AMD EPYC 9654)**

SPECspeed®2017\_int\_peak = 14.3

**CPU2017 License:** 6621  
**Test Sponsor:** Meganet  
**Tested by:** Fusionstor system

**Test Date:** Jan-2025  
**Hardware Availability:** Oct-2024  
**Software Availability:** Oct-2024

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-AMD-rev1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-AMD-rev1.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-01-22 01:20:40-0500.  
Report generated on 2025-03-12 10:24:25 by CPU2017 PDF formatter v6716.  
Originally published on 2025-03-11.