



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 499

meta brain NF5280G8 (Intel Xeon 6731E)

SPECrate®2017\_int\_peak = 520

CPU2017 License: 3358


Test Date: Feb-2025

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Oct-2024

Tested by: IEIT Systems Co., Ltd.

Software Availability: Jun-2024

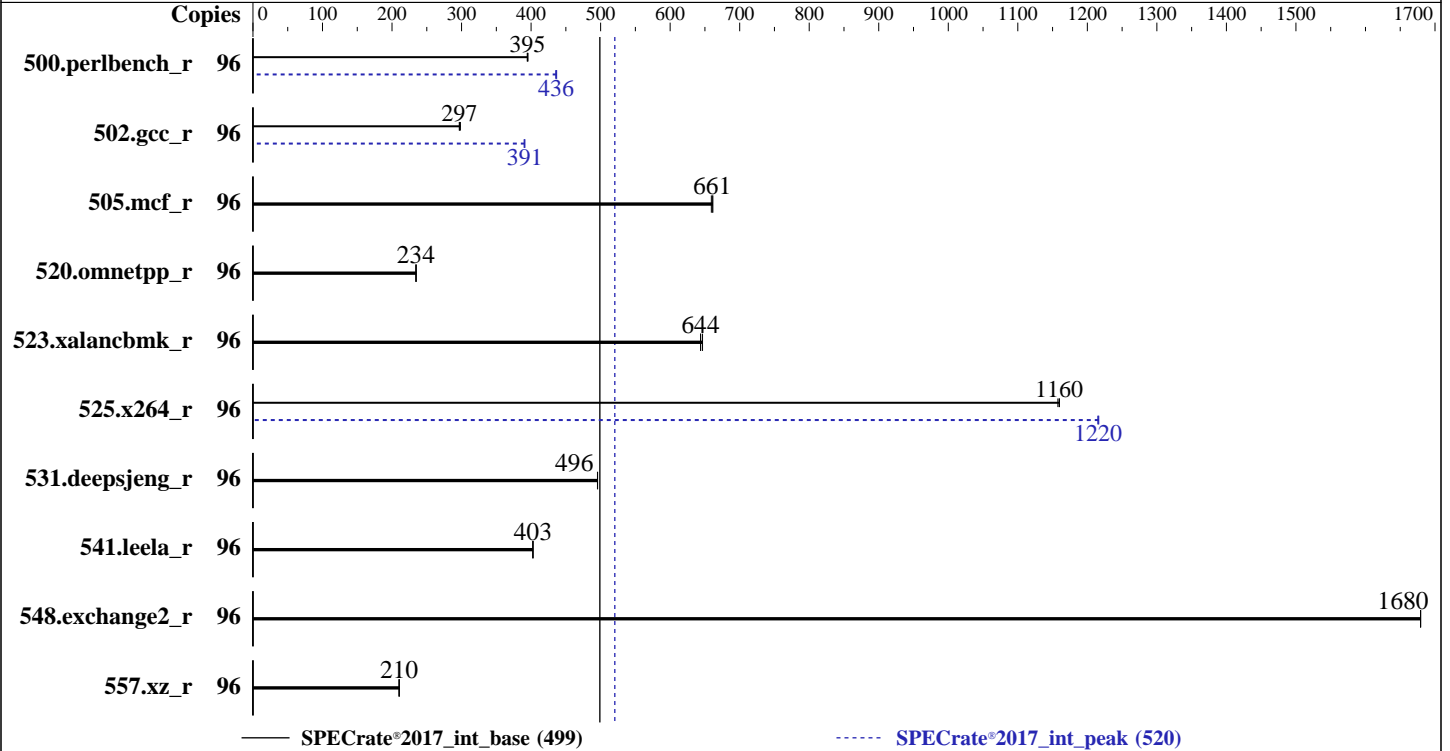

### Hardware

CPU Name: Intel Xeon 6731E  
 Max MHz: 3100  
 Nominal: 2200  
 Enabled: 96 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 4 MB I+D on chip per core  
 L3: 96 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (8 x 64 GB 2Rx4 PC5-6400B-R, running at 5600)  
 Storage: 1 x 960 GB SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
 6.4.0-150600.21-default  
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 00.17.04 released Nov-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 499

meta brain NF5280G8 (Intel Xeon 6731E)

SPECrate®2017\_int\_peak = 520

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Feb-2025

Hardware Availability: Oct-2024

Software Availability: Jun-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	387	394	386	396	<b>387</b>	<b>395</b>	96	350	437	351	435	<b>350</b>	<b>436</b>
502.gcc_r	96	458	297	<b>458</b>	<b>297</b>	456	298	96	<b>348</b>	<b>391</b>	349	390	348	391
505.mcf_r	96	235	659	235	661	<b>235</b>	<b>661</b>	96	235	659	235	661	<b>235</b>	<b>661</b>
520.omnetpp_r	96	<b>537</b>	<b>234</b>	538	234	536	235	96	<b>537</b>	<b>234</b>	538	234	536	235
523.xalancbmk_r	96	157	644	<b>157</b>	<b>644</b>	157	647	96	157	644	<b>157</b>	<b>644</b>	157	647
525.x264_r	96	145	1160	<b>145</b>	<b>1160</b>	145	1160	96	<b>138</b>	<b>1220</b>	138	1220	138	1220
531.deepsjeng_r	96	<b>222</b>	<b>496</b>	222	495	222	496	96	<b>222</b>	<b>496</b>	222	495	222	496
541.leela_r	96	395	402	395	403	<b>395</b>	<b>403</b>	96	395	402	395	403	<b>395</b>	<b>403</b>
548.exchange2_r	96	<b>150</b>	<b>1680</b>	150	1680	<b>150</b>	<b>1680</b>	96	<b>150</b>	<b>1680</b>	150	1680	<b>150</b>	<b>1680</b>
557.xz_r	96	<b>493</b>	<b>210</b>	493	210	493	210	96	<b>493</b>	<b>210</b>	493	210	493	210

SPECrate®2017\_int\_base = 499

SPECrate®2017\_int\_peak = 520

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/lib/ia32:/home/CPU2017/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 499

meta brain NF5280G8 (Intel Xeon 6731E)

SPECrate®2017\_int\_peak = 520

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Feb-2025

Hardware Availability: Oct-2024

Software Availability: Jun-2024

## General Notes (Continued)

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:  
ENERGY\_PERF\_BIAS\_CFG mode set to Performance  
Hardware Prefetch set to Disable  
VT Support set to Disable

Sysinfo program /home/CPU2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Tue Feb 18 10:46:38 2025

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```

1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

```

```

2. w
10:46:39 up 1 min, 1 user, load average: 0.16, 0.07, 0.02
USER      TTY      FROM          LOGIN@      IDLE        JCPU   PCPU   WHAT
root     tty1    -             10:46      7.00s     1.47s   0.04s  sh
reportable-ic2024.1-lin-sierraforest-rate-20240308.sh

```

```

3. Username
From environment variable $USER: root

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 499

meta brain NF5280G8 (Intel Xeon 6731E)

SPECrate®2017\_int\_peak = 520

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Feb-2025

Hardware Availability: Oct-2024

Software Availability: Jun-2024

### Platform Notes (Continued)

```

-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 2059486
max locked memory      (kbytes, -l) 8192
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time              (seconds, -t) unlimited
max user processes     (-u) 2059486
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=31
login -- root
-bash
sh reportable-ic2024.1-lin-sierraforest-rate-20240308.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 -c
  ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define cores=96 --define physicalfirst
  --define no-numa --reportable --tune base,peak -o all --define drop_caches intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 --configfile
  ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define cores=96 --define physicalfirst
  --define no-numa --reportable --tune base,peak --output_format all --define drop_caches --nopower
  --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.001/temlogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6731E
vendor_id      : GenuineIntel
cpu family     : 6
model          : 175
stepping       : 3
microcode      : 0x3000190
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 96
siblings       : 96
1 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-95
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,1
32,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,18
4,186,188,190

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 499

meta brain NF5280G8 (Intel Xeon 6731E)

SPECrate®2017\_int\_peak = 520

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Feb-2025

Hardware Availability: Oct-2024

Software Availability: Jun-2024

### Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):      32-bit, 64-bit
Address sizes:       52 bits physical, 48 bits virtual
Byte Order:          Little Endian
CPU(s):              96
On-line CPU(s) list: 0-95
Vendor ID:           GenuineIntel
BIOS Vendor ID:     Intel(R) Corporation
Model name:          Intel(R) Xeon(R) 6731E
BIOS Model name:    Intel(R) Xeon(R) 6731E  CPU @ 2.2GHz
BIOS CPU family:    179
CPU family:          6
Model:               175
Thread(s) per core: 1
Core(s) per socket: 96
Socket(s):           1
Stepping:            3
Frequency boost:     enabled
CPU(s) scaling MHz: 44%
CPU max MHz:         2201.0000
CPU min MHz:         800.0000
BogoMIPS:            4400.00
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                    pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                    pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                    nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                    pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                    pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
                    xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
                    cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
                    ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase
                    tsc_adjust bmil avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap
                    clflushopt clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves
                    cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                    user_shstk avx_vnni lam wbnoinvd dtherm ida arat pln pts vmmi umip
                    pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid bus_lock_detect
                    cldemote movdiri movdir64b enqcmd fsrm md_clear serialize pconfig
                    arch_lbr ibt flush_lld arch_capabilities
Virtualization:       VT-x
L1d cache:           3 MiB (96 instances)
L1i cache:           6 MiB (96 instances)
L2 cache:            96 MiB (24 instances)
L3 cache:            96 MiB (1 instance)
NUMA node(s):        1
NUMA node0 CPU(s):  0-95
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:                Not affected
Vulnerability Mds:                 Not affected
Vulnerability Meltdown:            Not affected
Vulnerability Mmio stale data:     Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:            Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:   Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:          Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:          Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 499

### meta brain NF5280G8 (Intel Xeon 6731E)

SPECrate®2017\_int\_peak = 520

**CPU2017 License:** 3358

**Test Sponsor:** IEIT Systems Co., Ltd.

**Tested by:** IEIT Systems Co., Ltd.

**Test Date:** Feb-2025

**Hardware Availability:** Oct-2024

**Software Availability:** Jun-2024

## Platform Notes (Continued)

Vulnerability Srbds:

Vulnerability Tsx async abort:

PBR SB-eIBRS Not affected; BHI BHI\_DIS\_S

Not affected

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	3M	8	Data	1	64	1	64
L1i	64K	6M	8	Instruction	1	128	1	64
L2	4M	96M	16	Unified	2	4096	1	64
L3	96M	96M	12	Unified	3	131072	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)

node 0 cpus: 0-95

node 0 size: 514897 MB

node 0 free: 513260 MB

node distances:

node 0

0: 10

9. /proc/meminfo

MemTotal: 527254836 kB

10. who -r

run-level 3 Feb 18 10:45

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status

multi-user running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

```

enabled      apparmor auditd cron firewalld getty@ irqbalance issue-generator kbdsettings kdump
              kdump-early kdump-notify nvme-fc-boot-connections nvme-autoconnect postfix purge-kernels
              rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
              wickedd-nanny
enabled-runtime  systemd-remount-fs
disabled       boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell ebttables
              exchange-bmc-os-info fsidd grub2-once haveged ipmievd issue-add-ssh-keys kexec-load
              lunmask nfs nfs-blkmap rpcbind rpmconfigcheck serial-getty@ systemd-boot-check-no-failures
              systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
              systemd-timesyncd
generated     jexec
indirect      systemd-userdbd wickedd

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=3d2e35de-7a40-49d4-9b7e-5a61505ac35b
splash=silent
resume=/dev/disk/by-uuid/12ee3b15-7778-419b-ab9f-ab402e71e53d
mitigations=auto
quiet
security=apparmor

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 499

meta brain NF5280G8 (Intel Xeon 6731E)

SPECrate®2017\_int\_peak = 520

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Feb-2025

Hardware Availability: Oct-2024

Software Availability: Jun-2024

## Platform Notes (Continued)

crashkernel=370M,high  
crashkernel=72M,low

### 14. cpupower frequency-info

analyzing CPU 38:

current policy: frequency should be within 800 MHz and 2.20 GHz.  
The governor "ondemand" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

### 15. sysctl

kernel.numa_balancing	0
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	60
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

### 16. /sys/kernel/mm/transparent\_hugepage

defrag	always	defer	defer+madvise	[madvise]	never
enabled	[always]	madvise	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

### 17. /sys/kernel/mm/transparent\_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

### 18. OS release

From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP6

### 19. Disk information

SPEC is set to: /home/CPU2017

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 499

### meta brain NF5280G8 (Intel Xeon 6731E)

SPECrate®2017\_int\_peak = 520

**CPU2017 License:** 3358

**Test Sponsor:** IEIT Systems Co., Ltd.

**Tested by:** IEIT Systems Co., Ltd.

**Test Date:** Feb-2025

**Hardware Availability:** Oct-2024

**Software Availability:** Jun-2024

## Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p3	xfs	381G	262G	119G	69%	/home

```

20. /sys/devices/virtual/dmi/id
Vendor:      IEIT SYSTEMS
Product:     NF5280-M8-A0-R0-00
Product Family: Not specified
Serial:      000000000

```

```

21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
8x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400, configured at 5600

```

```

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:    American Megatrends International, LLC.
BIOS Version:   00.17.04
BIOS Date:      11/29/2024

```

## Compiler Version Notes

C | 502.gcc\_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C | 502.gcc\_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 499

meta brain NF5280G8 (Intel Xeon 6731E)

SPECrate®2017\_int\_peak = 520

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Feb-2025

Hardware Availability: Oct-2024

Software Availability: Jun-2024

## Compiler Version Notes (Continued)

-----  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
541.leela\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

-----  
Fortran | 548.exchange2\_r(base, peak)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502 gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 499

meta brain NF5280G8 (Intel Xeon 6731E)

SPECrate®2017\_int\_peak = 520

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Feb-2025

Hardware Availability: Oct-2024

Software Availability: Jun-2024

## Base Optimization Flags (Continued)

C benchmarks (continued):

`-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc`

C++ benchmarks:

`-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math`

`-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4`

`-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc`

Fortran benchmarks:

`-w -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math -flto`

`-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4`

`-nostandard-realloc-lhs -align array32byte -auto`

`-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc`

## Peak Compiler Invocation

C benchmarks:

`icx`

C++ benchmarks:

`icpx`

Fortran benchmarks:

`ifx`

## Peak Portability Flags

500.perlbench\_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`

502.gc\_r: `-D_FILE_OFFSET_BITS=64`

505.mcf\_r: `-DSPEC_LP64`

520.omnetpp\_r: `-DSPEC_LP64`

523.xalancbmk\_r: `-DSPEC_LP64 -DSPEC_LINUX`

525.x264\_r: `-DSPEC_LP64`

531.deepsjeng\_r: `-DSPEC_LP64`

541.leela\_r: `-DSPEC_LP64`

548.exchange2\_r: `-DSPEC_LP64`

557.xz\_r: `-DSPEC_LP64`



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 499

meta brain NF5280G8 (Intel Xeon 6731E)

SPECrate®2017\_int\_peak = 520

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Feb-2025

Hardware Availability: Oct-2024

Software Availability: Jun-2024

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-strict-overflow
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

```
502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.1/lib32 -std=gnu89
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib
-ljemalloc
```

505.mcf\_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/IEIT-Platform-Settings-intel-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/IEIT-Platform-Settings-intel-V1.2.xml>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_int\_base = 499

meta brain NF5280G8 (Intel Xeon 6731E)

SPECrate®2017\_int\_peak = 520

**CPU2017 License:** 3358

**Test Sponsor:** IEIT Systems Co., Ltd.

**Tested by:** IEIT Systems Co., Ltd.

**Test Date:** Feb-2025

**Hardware Availability:** Oct-2024

**Software Availability:** Jun-2024

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-02-18 10:46:38-0500.

Report generated on 2025-03-12 10:24:25 by CPU2017 PDF formatter v6716.

Originally published on 2025-03-11.