



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL345 Gen11


(4.10 GHz, AMD EPYC 9275F)

SPECrate®2017\_int\_base = 383

SPECrate®2017\_int\_peak = 389

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Dec-2024  
Hardware Availability: Jan-2025  
Software Availability: Oct-2024

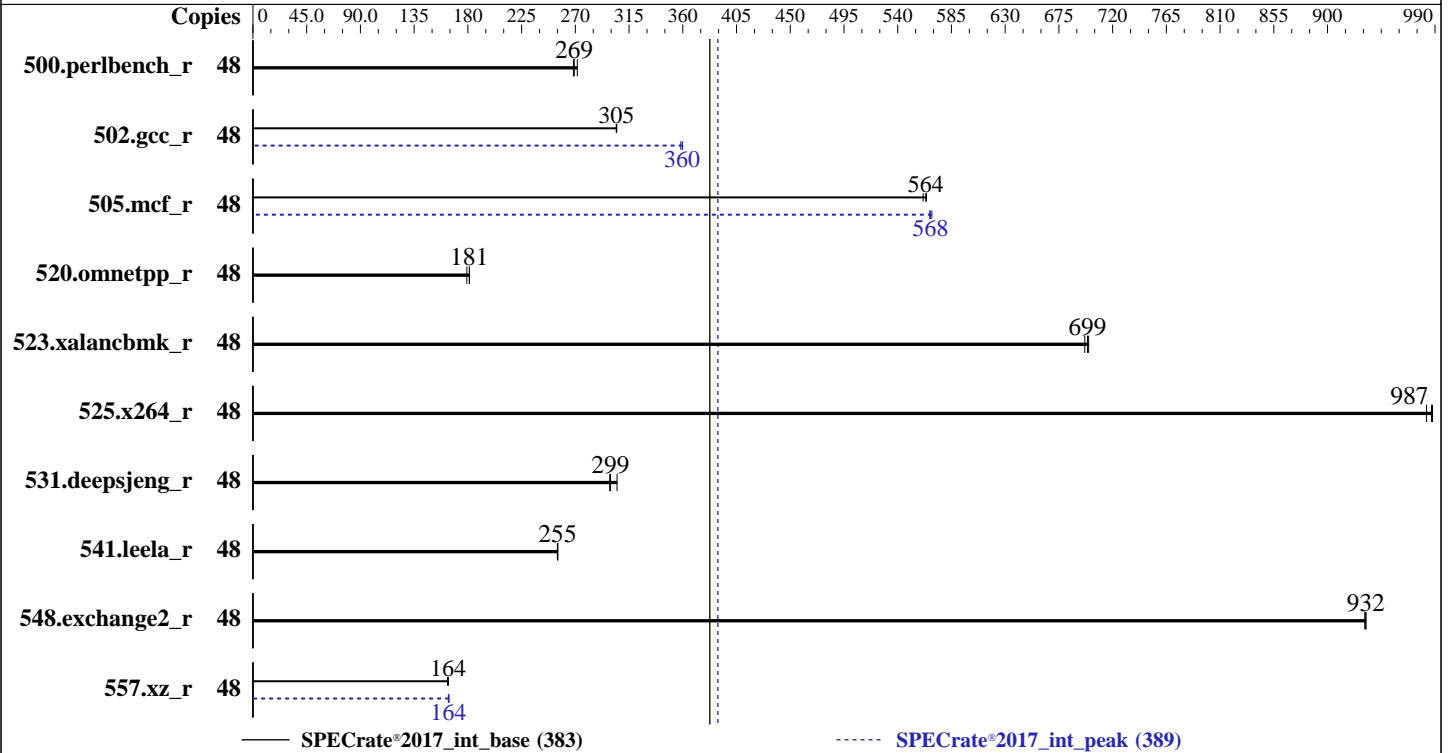

### Hardware

CPU Name: AMD EPYC 9275F  
 Max MHz: 4800  
 Nominal: 4100  
 Enabled: 24 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 32 MB shared / 3 cores  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx8 PC5-6400B-R,  
 running at 6000)  
 Storage: 1 x 480 GB SATA SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
 Kernel 6.4.0-150600.21-default  
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC  
 Parallel: No  
 Firmware: HPE BIOS Version v2.20 10/31/2024 released  
 Oct-2024  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at  
 the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(4.10 GHz, AMD EPYC 9275F)

SPECrate®2017\_int\_base = 383

SPECrate®2017\_int\_peak = 389

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Dec-2024  
Hardware Availability: Jan-2025  
Software Availability: Oct-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	281	272	285	268	<b>284</b>	<b>269</b>	48	281	272	285	268	<b>284</b>	<b>269</b>
502.gcc_r	48	<b>223</b>	<b>305</b>	223	305	223	304	48	189	360	<b>189</b>	<b>360</b>	190	358
505.mcf_r	48	138	561	138	564	<b>138</b>	<b>564</b>	48	136	569	<b>137</b>	<b>568</b>	137	567
520.omnetpp_r	48	<b>347</b>	<b>181</b>	352	179	347	181	48	<b>347</b>	<b>181</b>	352	179	347	181
523.xalancbmk_r	48	72.4	700	<b>72.5</b>	<b>699</b>	72.8	697	48	72.4	700	<b>72.5</b>	<b>699</b>	72.8	697
525.x264_r	48	85.1	988	85.5	983	<b>85.2</b>	<b>987</b>	48	85.1	988	85.5	983	<b>85.2</b>	<b>987</b>
531.deepsjeng_r	48	184	299	180	305	<b>184</b>	<b>299</b>	48	184	299	180	305	<b>184</b>	<b>299</b>
541.leela_r	48	312	255	<b>311</b>	<b>255</b>	311	255	48	312	255	<b>311</b>	<b>255</b>	311	255
548.exchange2_r	48	135	931	135	932	<b>135</b>	<b>932</b>	48	135	931	135	932	<b>135</b>	<b>932</b>
557.xz_r	48	318	163	<b>317</b>	<b>164</b>	317	164	48	316	164	<b>317</b>	<b>164</b>	317	164

SPECrate®2017\_int\_base = **383**

SPECrate®2017\_int\_peak = **389**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL345 Gen11**

(4.10 GHz, AMD EPYC 9275F)

**SPECrate®2017\_int\_base = 383**

**SPECrate®2017\_int\_peak = 389**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Dec-2024  
**Hardware Availability:** Jan-2025  
**Software Availability:** Oct-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
"/home/cpu2017/amd_rate_aocc500_zenver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_zenver5_A_lib/lib32:"  
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration  
Workload Profile set to General Throughput Compute  
Determinism Control set to Manual  
Performance Determinism set to Power Deterministic  
Memory Patrol Scrubbing set to Disabled  
NUMA memory domains per socket set to Four memory domains per socket  
ACPI CST C2 Latency set to 18 microseconds  
Thermal Configuration set to Maximum Cooling  
AMD Periodic Directory Rinse set to Periodic  
Workload Profile set to Custom  
Power Regulator set to OS Control Mode  
The reference code/AGESA version used in this ROM is version Turin-PI 1.0.0.2

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Mon Dec 9 10:52:05 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(4.10 GHz, AMD EPYC 9275F)

SPECrate®2017\_int\_base = 383

SPECrate®2017\_int\_peak = 389

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Dec-2024  
**Hardware Availability:** Jan-2025  
**Software Availability:** Oct-2024

## Platform Notes (Continued)

```
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
```

```
-----
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
-----
2. w
 10:52:05 up 1 day,  1:31,  1 user,  load average: 0.00, 0.00, 0.00
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
root      pts/0    172.17.1.114  22Apr24 13.00s  0.75s  0.04s  /bin/bash ./amd_rate_aocc500_znver5_A1.sh
```

```
-----
3. Username
From environment variable $USER:  root
```

```
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 1546470
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes      (-u) 1546470
virtual memory           (kbytes, -v) unlimited
file locks               (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
python3 ./run_intrate.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.005/templogs/preenv.intrate.005.0.log --lognum 005.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
-----
6. /proc/cpuinfo
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL345 Gen11

(4.10 GHz, AMD EPYC 9275F)

## SPECrate®2017\_int\_base = 383

## SPECrate®2017\_int\_peak = 389

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Dec-2024  
**Hardware Availability:** Jan-2025  
**Software Availability:** Oct-2024

## Platform Notes (Continued)

```
model name      : AMD EPYC 9275F 24-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 2
stepping        : 1
microcode       : 0xb00211a
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 24
siblings        : 48
1 physical ids (chips)
48 processors (hardware threads)
physical id 0:  core ids 0-2,4-6,8-10,12-14,16-18,20-22,24-26,28-30
physical id 0:  apicids 0-5,8-13,16-21,24-29,32-37,40-45,48-53,56-61
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                48
On-line CPU(s) list:  0-47
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:           AMD EPYC 9275F 24-Core Processor
BIOS Model name:      AMD EPYC 9275F 24-Core Processor
BIOS CPU family:      107
CPU family:           26
Model:                2
Thread(s) per core:   2
Core(s) per socket:   24
Socket(s):            1
Stepping:             1
Frequency boost:      enabled
CPU(s) scaling MHz:   100%
CPU max MHz:          4100.0000
CPU min MHz:          1500.0000
BogoMIPS:             8187.85
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                    pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                    rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                    extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                    sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm
                    cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                    osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                    perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                    ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                    smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                    avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                    xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                    cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                    xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
                    nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                    pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
                    avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL345 Gen11

(4.10 GHz, AMD EPYC 9275F)

## SPECrate®2017\_int\_base = 383

## SPECrate®2017\_int\_peak = 389

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Dec-2024  
**Hardware Availability:** Jan-2025  
**Software Availability:** Oct-2024

## Platform Notes (Continued)

```
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_llld debug_swap
```

AMD-V

Virtualization:  
L1d cache: 1.1 MiB (24 instances)  
L1i cache: 768 KiB (24 instances)  
L2 cache: 24 MiB (24 instances)  
L3 cache: 256 MiB (8 instances)

NUMA node(s): 4  
NUMA node0 CPU(s): 0-5,24-29  
NUMA node1 CPU(s): 6-11,30-35  
NUMA node2 CPU(s): 12-17,36-41  
NUMA node3 CPU(s): 18-23,42-47

Vulnerability Gather data sampling: Not affected  
Vulnerability Itlb multihit: Not affected  
Vulnerability L1tf: Not affected  
Vulnerability Mds: Not affected  
Vulnerability Meltdown: Not affected  
Vulnerability Mmio stale data: Not affected  
Vulnerability Reg file data sampling: Not affected  
Vulnerability Retbleed: Not affected  
Vulnerability Spec rstack overflow: Not affected  
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBRBS-eIBRS Not affected; BHI Not affected  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.1M	12	Data	1	64	1	64
L1i	32K	768K	8	Instruction	1	64	1	64
L2	1M	24M	16	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-5,24-29
node 0 size: 96410 MB
node 0 free: 96101 MB
node 1 cpus: 6-11,30-35
node 1 size: 96764 MB
node 1 free: 96466 MB
node 2 cpus: 12-17,36-41
node 2 size: 96764 MB
node 2 free: 96424 MB
node 3 cpus: 18-23,42-47
node 3 size: 96702 MB
node 3 free: 96412 MB
node distances:
node  0  1  2  3
0:  10 12 12 12
1:  12 10 12 12
2:  12 12 10 12
3:  12 12 12 10
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(4.10 GHz, AMD EPYC 9275F)

SPECrate®2017\_int\_base = 383

SPECrate®2017\_int\_peak = 389

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Dec-2024  
**Hardware Availability:** Jan-2025  
**Software Availability:** Oct-2024

## Platform Notes (Continued)

9. /proc/meminfo

MemTotal: 395921872 kB

10. who -r

run-level 3 Apr 22 17:30

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled apparmor auditd chronyd cron getty@ irqbalance issue-generator kbdsettings lvm2-monitor  
postfix purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4  
wickedd-dhcp6 wickedd-nanny

enabled-runtime systemd-remount-fs

disabled blk-availability boot-sysctl ca-certificates chrony-wait console-getty debug-shell  
grub2-once haveged hwloc-dump-hwdata issue-add-ssh-keys kexec-load lunmask rpmconfigcheck  
serial-getty@ systemd-boot-check-no-failures systemd-confext systemd-network-generator  
systemd-sysext systemd-time-wait-sync systemd-timesyncd

indirect pcsd systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT\_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default  
root=UUID=04efbdca-1d19-4013-beec-bea4f709b7ae  
splash=silent  
mitigations=auto  
quiet  
security=apparmor

14. cpupower frequency-info

analyzing CPU 32:

current policy: frequency should be within 1.50 GHz and 4.10 GHz.  
The governor "performance" may decide which speed to use  
within this range.

boost state support:

Supported: yes  
Active: yes

15. sysctl

kernel.numa\_balancing 1  
kernel.randomize\_va\_space 0  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 8  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL345 Gen11

(4.10 GHz, AMD EPYC 9275F)

SPECrate®2017\_int\_base = 383

SPECrate®2017\_int\_peak = 389

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Dec-2024  
**Hardware Availability:** Jan-2025  
**Software Availability:** Oct-2024

## Platform Notes (Continued)

```
vm.nr_overcommit_hugepages      0
vm.swappiness                     1
vm.watermark_boost_factor        15000
vm.watermark_scale_factor         10
vm.zone_reclaim_mode             1
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs   10000
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
```

```
-----
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       btrfs 445G  27G  415G   6% /home
```

```
-----
20. /sys/devices/virtual/dmi/id
Vendor:          HPE
Product:         ProLiant DL345 Gen11
Product Family: ProLiant
Serial:          DL345G11-002
```

```
-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  11x Hynix HMC88AHBRA471N 32 GB 2 rank 6400, configured at 6000
  1x Hynix HMC88AHBRA472N 32 GB 2 rank 6400, configured at 6000
```

```
-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      HPE
BIOS Version:     2.20
BIOS Date:        10/31/2024
BIOS Revision:    2.20
Firmware Revision: 1.63
```





# SPEC CPU<sup>®</sup>2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(4.10 GHz, AMD EPYC 9275F)

SPECrate<sup>®</sup>2017\_int\_base = 383

SPECrate<sup>®</sup>2017\_int\_peak = 389

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Dec-2024  
**Hardware Availability:** Jan-2025  
**Software Availability:** Oct-2024

## Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

=====  
C | 502.gcc\_r(peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

=====  
Fortran | 548.exchange2\_r(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(4.10 GHz, AMD EPYC 9275F)

SPECrate®2017\_int\_base = 383

SPECrate®2017\_int\_peak = 389

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Dec-2024

**Hardware Availability:** Jan-2025

**Software Availability:** Oct-2024

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(4.10 GHz, AMD EPYC 9275F)

SPECrate®2017\_int\_base = 383

SPECrate®2017\_int\_peak = 389

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Dec-2024

**Hardware Availability:** Jan-2025

**Software Availability:** Oct-2024

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(4.10 GHz, AMD EPYC 9275F)

SPECrate®2017\_int\_base = 383

SPECrate®2017\_int\_peak = 389

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Dec-2024

**Hardware Availability:** Jan-2025

**Software Availability:** Oct-2024

## Peak Portability Flags

```

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: basepeak = yes

```

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc

```

```

505.mcf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl

```

525.x264\_r: basepeak = yes

```

557.xz_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(4.10 GHz, AMD EPYC 9275F)

SPECrate®2017\_int\_base = 383

SPECrate®2017\_int\_peak = 389

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Dec-2024

**Hardware Availability:** Jan-2025

**Software Availability:** Oct-2024

## Peak Optimization Flags (Continued)

557.xz\_r (continued):

```
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl
```

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

## Peak Other Flags

C benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

502.gcc\_r: -L/usr/lib32 -Wno-unused-command-line-argument

```
-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.3.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.3.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(4.10 GHz, AMD EPYC 9275F)

SPECrate®2017\_int\_base = 383

SPECrate®2017\_int\_peak = 389

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Dec-2024

**Hardware Availability:** Jan-2025

**Software Availability:** Oct-2024

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-12-09 00:22:05-0500.

Report generated on 2025-03-12 10:25:30 by CPU2017 PDF formatter v6716.

Originally published on 2025-03-11.