



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)


HPE Compute Scale-up Server 3200  
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017\_int\_base = 4100

SPECrate®2017\_int\_peak = 4240

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Mar-2025  
Hardware Availability: Sep-2023  
Software Availability: Feb-2025

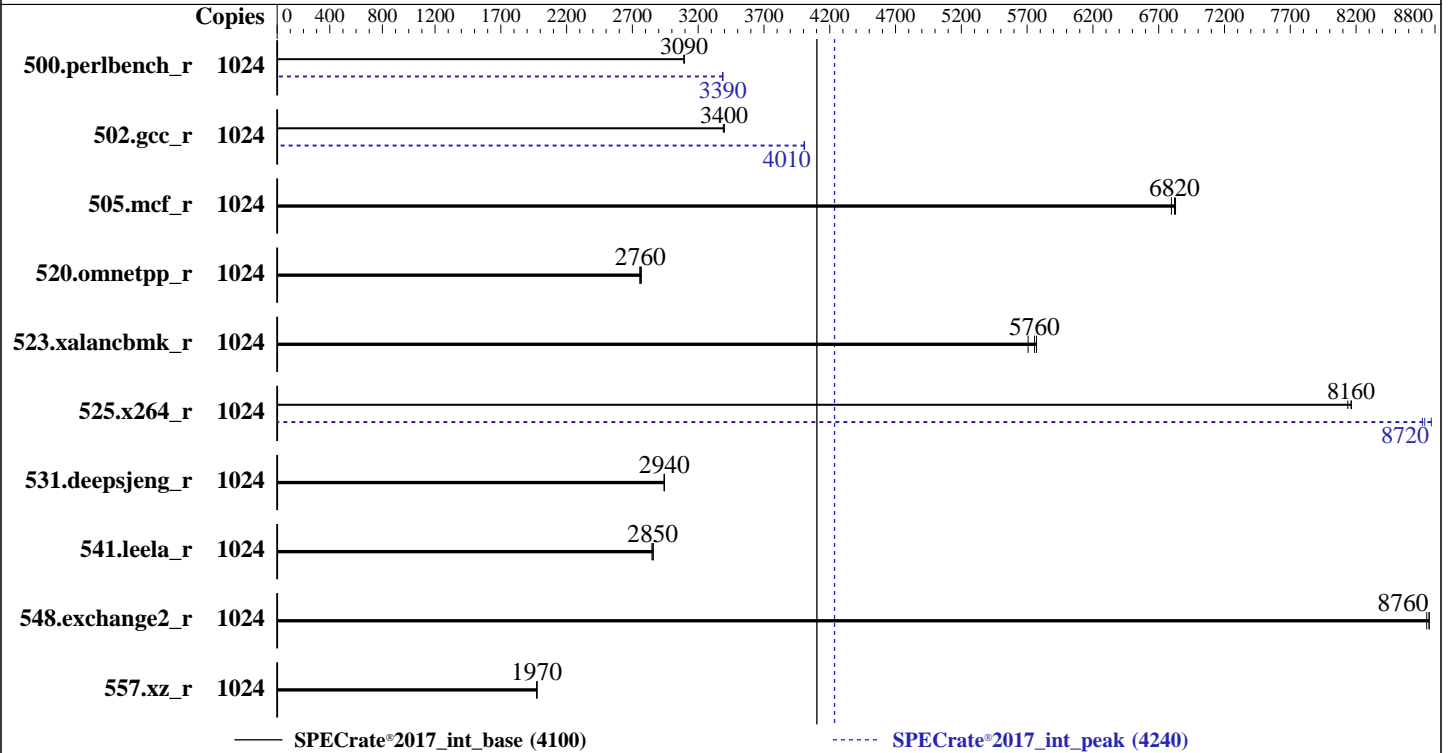

### Hardware

CPU Name: Intel Xeon Platinum 8454H  
 Max MHz: 3400  
 Nominal: 2100  
 Enabled: 512 cores, 16 chips, 2 threads/core  
 Orderable: 4, 8, 16 chip(s)  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 82.5 MB I+D on chip per chip  
 Other: None  
 Memory: 16 TB (256 x 64 GB 2Rx4 PC5-4800B-R, running at 4400)  
 Storage: 1 x 6.4 TB NVMe SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
 Kernel 6.4.0-150600.23.38-default  
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: HPE Firmware Bundle Version 1.55.40 01/27/2025 released  
 Jan-2025  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**HPE Compute Scale-up Server 3200**  
(2.10 GHz, Intel Xeon Platinum 8454H)

**SPECrate®2017\_int\_base = 4100**

**SPECrate®2017\_int\_peak = 4240**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2025  
**Hardware Availability:** Sep-2023  
**Software Availability:** Feb-2025

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	1024	<b>527</b>	<b>3090</b>	527	3100	527	3090	1024	481	3390	<b>481</b>	<b>3390</b>	481	3390
502.gcc_r	1024	427	3400	428	3390	<b>427</b>	<b>3400</b>	1024	<b>362</b>	<b>4010</b>	362	4010	362	4000
505.mcf_r	1024	243	6800	242	6830	<b>243</b>	<b>6820</b>	1024	243	6800	242	6830	<b>243</b>	<b>6820</b>
520.omnetpp_r	1024	485	2770	<b>487</b>	<b>2760</b>	487	2760	1024	485	2770	<b>487</b>	<b>2760</b>	487	2760
523.xalancbmk_r	1024	<b>188</b>	<b>5760</b>	187	5770	189	5710	1024	<b>188</b>	<b>5760</b>	187	5770	189	5710
525.x264_r	1024	220	8160	<b>220</b>	<b>8160</b>	220	8140	1024	204	8770	206	8700	<b>206</b>	<b>8720</b>
531.deepsjeng_r	1024	<b>399</b>	<b>2940</b>	399	2940	399	2940	1024	<b>399</b>	<b>2940</b>	399	2940	399	2940
541.leela_r	1024	593	2860	<b>594</b>	<b>2850</b>	595	2850	1024	593	2860	<b>594</b>	<b>2850</b>	595	2850
548.exchange2_r	1024	307	8740	306	8760	<b>306</b>	<b>8760</b>	1024	307	8740	306	8760	<b>306</b>	<b>8760</b>
557.xz_r	1024	<b>561</b>	<b>1970</b>	561	1970	560	1980	1024	<b>561</b>	<b>1970</b>	561	1970	560	1980

**SPECrate®2017\_int\_base = 4100**

**SPECrate®2017\_int\_peak = 4240**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**HPE Compute Scale-up Server 3200**  
(2.10 GHz, Intel Xeon Platinum 8454H)

**SPECrate®2017\_int\_base = 4100**

**SPECrate®2017\_int\_peak = 4240**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2025  
**Hardware Availability:** Sep-2023  
**Software Availability:** Feb-2025

## General Notes (Continued)

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Configuration:

Workload Profile set to Custom  
Energy/Performance Bias set to Maximum Performance  
Energy Efficient Turbo set to Disabled  
Advanced Memory Protection set to Advanced ECC Support  
SR-IOV set to Disabled  
Intel Virtualization Technology (Intel VT, VT-x) set to Disabled  
Adjacent Sector Prefetch set to Disabled  
DCU Stream Prefetcher set to Disabled  
Last Level Cache (LLC) Dead Line Allocation set to Disabled  
Enhanced Processor Performance Profile set to Aggressive  
Memory Patrol Scrubbing set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on sph-275 Sat Mar 1 13:06:32 2025

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 254 (254.23+suse.141.g9376e684d0)
  12. Failed units, from systemctl list-units --state=failed
  13. Services, from systemctl list-unit-files
  14. Linux kernel boot-time arguments, from /proc/cmdline
  15. cpupower frequency-info
  16. tuned-adm active
  17. sysctl
  18. /sys/kernel/mm/transparent\_hugepage
  19. /sys/kernel/mm/transparent\_hugepage/khugepaged
  20. OS release
  21. Disk information
  22. /sys/devices/virtual/dmi/id
  23. dmidecode
  24. BIOS
- 
1. uname -a  
Linux sph-275 6.4.0-150600.23.38-default #1 SMP PREEMPT\_DYNAMIC Thu Feb 6 08:53:28 UTC 2025 (cb92f8c)  
x86\_64 x86\_64 x86\_64 GNU/Linux

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200

(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017\_int\_base = 4100

SPECrate®2017\_int\_peak = 4240

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2025  
**Hardware Availability:** Sep-2023  
**Software Availability:** Feb-2025

## Platform Notes (Continued)

```

2. w
   13:06:32 up 7 min,  1 user,  load average: 0.31, 2.41, 1.64
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
test     ttyS0    -             13:02    3:36   0.05s  0.07s login -- test
test     pts/0    -             13:02    8.00s  1.58s  0.02s sudo su

```

```

3. Username
   From environment variable $USER:  root
   From the command 'logname':      test

```

```

4. ulimit -a
   core file size          (blocks, -c) 0
   data seg size           (kbytes, -d) unlimited
   scheduling priority     (-e) 0
   file size                (blocks, -f) unlimited
   pending signals         (-i) 65026817
   max locked memory       (kbytes, -l) 8192
   max memory size         (kbytes, -m) unlimited
   open files              (-n) 40000
   pipe size                (512 bytes, -p) 8
   POSIX message queues    (bytes, -q) 819200
   real-time priority      (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time                (seconds, -t) unlimited
   max user processes      (-u) 65026817
   virtual memory          (kbytes, -v) unlimited
   file locks              (-x) unlimited

```

```

5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize=42
   login -- test
   -bash
   sudo su
   sudo su
   su
   bash
   bash
   bash
   bash
   runcpu --nobuild --action validate --define default-platform-flags --define numcopies=1024 -c
   ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=512 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
   runcpu --nobuild --action validate --define default-platform-flags --define numcopies=1024 --configfile
   ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=512 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
   --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.016/templogs/preenv.intrate.016.0.log --lognum 016.0 --from_runcpu 2
   specperl $SPEC/bin/sysinfo
   $SPEC = /home/cpu2017

```

```

6. /proc/cpuinfo
   model name      : Intel(R) Xeon(R) Platinum 8454H
   vendor_id       : GenuineIntel
   cpu family      : 6
   model           : 143
   stepping        : 8

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**HPE Compute Scale-up Server 3200**  
(2.10 GHz, Intel Xeon Platinum 8454H)

**SPECrate®2017\_int\_base = 4100**

**SPECrate®2017\_int\_peak = 4240**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2025  
**Hardware Availability:** Sep-2023  
**Software Availability:** Feb-2025

## Platform Notes (Continued)

```

microcode      : 0x2b000620
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
cpu cores     : 32
siblings      : 64
16 physical ids (chips)
1024 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 2: core ids 0-31
physical id 3: core ids 0-31
physical id 4: core ids 0-31
physical id 5: core ids 0-31
physical id 6: core ids 0-31
physical id 7: core ids 0-31
physical id 8: core ids 0-31
physical id 9: core ids 0-31
physical id 10: core ids 0-31
physical id 11: core ids 0-31
physical id 12: core ids 0-31
physical id 13: core ids 0-31
physical id 14: core ids 0-31
physical id 15: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191
physical id 2: apicids 256-319
physical id 3: apicids 384-447
physical id 4: apicids 512-575
physical id 5: apicids 640-703
physical id 6: apicids 768-831
physical id 7: apicids 896-959
physical id 8: apicids 1024-1087
physical id 9: apicids 1152-1215
physical id 10: apicids 1280-1343
physical id 11: apicids 1408-1471
physical id 12: apicids 1536-1599
physical id 13: apicids 1664-1727
physical id 14: apicids 1792-1855
physical id 15: apicids 1920-1983

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 1024
On-line CPU(s) list:   0-1023
Vendor ID:              GenuineIntel
Model name:              Intel(R) Xeon(R) Platinum 8454H
CPU family:              6
Model:                  143
Thread(s) per core:     2
Core(s) per socket:     32
Socket(s):               16
Stepping:                8
CPU(s) scaling MHz:    25%

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200  
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017\_int\_base = 4100

SPECrate®2017\_int\_peak = 4240

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2025  
**Hardware Availability:** Sep-2023  
**Software Availability:** Feb-2025

## Platform Notes (Continued)

```

CPU max MHz:          3400.0000
CPU min MHz:          800.0000
BogoMIPS:             4200.02
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                    pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                    pdpe1gb rdtscp lm constant_tsc arch_perfmon pebs bts rep_good nopl
                    xtopology nonstop_tsc cpuid aperfmperf pni pclmulqdq dtes64 monitor
                    ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                    sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
                    rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                    intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
                    tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f
                    avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd
                    sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
                    cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                    user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp
                    hwp_act_window hwp_pkg_req avx512vbmi umip pku ospke waitpkg
                    avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                    avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri
                    movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr
                    ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_lld
                    arch_capabilities
L1d cache:           24 MiB (512 instances)
L1i cache:           16 MiB (512 instances)
L2 cache:            1 GiB (512 instances)
L3 cache:            1.3 GiB (16 instances)
NUMA node(s):        16
NUMA node0 CPU(s):  0-31,512-543
NUMA node1 CPU(s):  32-63,544-575
NUMA node2 CPU(s):  64-95,576-607
NUMA node3 CPU(s):  96-127,608-639
NUMA node4 CPU(s):  128-159,640-671
NUMA node5 CPU(s):  160-191,672-703
NUMA node6 CPU(s):  192-223,704-735
NUMA node7 CPU(s):  224-255,736-767
NUMA node8 CPU(s):  256-287,768-799
NUMA node9 CPU(s):  288-319,800-831
NUMA node10 CPU(s): 320-351,832-863
NUMA node11 CPU(s): 352-383,864-895
NUMA node12 CPU(s): 384-415,896-927
NUMA node13 CPU(s): 416-447,928-959
NUMA node14 CPU(s): 448-479,960-991
NUMA node15 CPU(s): 480-511,992-1023
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:       Not affected
Vulnerability L1tf:                 Not affected
Vulnerability Mds:                  Not affected
Vulnerability Meltdown:             Not affected
Vulnerability Mmio stale data:      Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:             Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:    Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:           Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:           Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                    PBRSE-eIBRS SW sequence; BHI BHI_DIS_S
Vulnerability Srbds:                Not affected
Vulnerability Tsx async abort:      Not affected

```

From lscpu --cache:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200  
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017\_int\_base = 4100

SPECrate®2017\_int\_peak = 4240

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2025  
**Hardware Availability:** Sep-2023  
**Software Availability:** Feb-2025

### Platform Notes (Continued)

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	24M	12	Data	1	64	1	64
L1i	32K	16M	8	Instruction	1	64	1	64
L2	2M	1G	16	Unified	2	2048	1	64
L3	82.5M	1.3G	15	Unified	3	90112	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0-31,512-543
node 0 size: 1015351 MB
node 0 free: 1013228 MB
node 1 cpus: 32-63,544-575
node 1 size: 1016234 MB
node 1 free: 1015352 MB
node 2 cpus: 64-95,576-607
node 2 size: 1016234 MB
node 2 free: 1014571 MB
node 3 cpus: 96-127,608-639
node 3 size: 1016234 MB
node 3 free: 1015056 MB
node 4 cpus: 128-159,640-671
node 4 size: 1016234 MB
node 4 free: 1015216 MB
node 5 cpus: 160-191,672-703
node 5 size: 1016234 MB
node 5 free: 1015405 MB
node 6 cpus: 192-223,704-735
node 6 size: 1016196 MB
node 6 free: 1015171 MB
node 7 cpus: 224-255,736-767
node 7 size: 1016234 MB
node 7 free: 1015081 MB
node 8 cpus: 256-287,768-799
node 8 size: 1016234 MB
node 8 free: 1015803 MB
node 9 cpus: 288-319,800-831
node 9 size: 1016234 MB
node 9 free: 1015832 MB
node 10 cpus: 320-351,832-863
node 10 size: 1016234 MB
node 10 free: 1015528 MB
node 11 cpus: 352-383,864-895
node 11 size: 1016234 MB
node 11 free: 1015533 MB
node 12 cpus: 384-415,896-927
node 12 size: 1016234 MB
node 12 free: 1013864 MB
node 13 cpus: 416-447,928-959
node 13 size: 1016234 MB
node 13 free: 1013943 MB
node 14 cpus: 448-479,960-991
node 14 size: 1016234 MB
node 14 free: 1013977 MB
node 15 cpus: 480-511,992-1023
node 15 size: 1014139 MB
node 15 free: 1012389 MB
node distances:
node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200  
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017\_int\_base = 4100

SPECrate®2017\_int\_peak = 4240

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2025  
**Hardware Availability:** Sep-2023  
**Software Availability:** Feb-2025

### Platform Notes (Continued)

0:	10	16	16	18	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
1:	16	10	18	16	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
2:	16	18	10	16	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
3:	18	16	16	10	40	40	40	40	40	40	40	40	40	40	40	40	40	40	40
4:	40	40	40	40	10	16	16	18	40	40	40	40	40	40	40	40	40	40	40
5:	40	40	40	40	16	10	18	16	40	40	40	40	40	40	40	40	40	40	40
6:	40	40	40	40	16	18	10	16	40	40	40	40	40	40	40	40	40	40	40
7:	40	40	40	40	18	16	16	10	40	40	40	40	40	40	40	40	40	40	40
8:	40	40	40	40	40	40	40	40	10	16	16	18	40	40	40	40	40	40	40
9:	40	40	40	40	40	40	40	40	16	10	18	16	40	40	40	40	40	40	40
10:	40	40	40	40	40	40	40	40	16	18	10	16	40	40	40	40	40	40	40
11:	40	40	40	40	40	40	40	40	18	16	16	10	40	40	40	40	40	40	40
12:	40	40	40	40	40	40	40	40	40	40	40	10	16	16	18	40	40	40	40
13:	40	40	40	40	40	40	40	40	40	40	40	16	10	18	16	40	40	40	40
14:	40	40	40	40	40	40	40	40	40	40	40	16	18	10	16	40	40	40	40
15:	40	40	40	40	40	40	40	40	40	40	40	18	16	16	10	40	40	40	40

```
-----
9. /proc/meminfo
   MemTotal:      16646898172 kB
-----
```

```
-----
10. who -r
    run-level 3 Mar 1 13:01
-----
```

```
-----
11. Systemd service manager version: systemd 254 (254.23+suse.141.g9376e684d0)
    Default Target Status
    multi-user          degraded
-----
```

```
-----
12. Failed units, from systemctl list-units --state=failed
    UNIT                                LOAD    ACTIVE SUB    DESCRIPTION
* dcdchkgracefulshutdown.service      loaded failed failed Check if previous system shutdown was graceful
* postfix.service                     loaded failed failed Postfix Mail Transport Agent
-----
```

```
-----
13. Services, from systemctl list-unit-files
    STATE                               UNIT FILES
enabled                                YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth chronyd
cpuset_cpunodemap cpuset_memory_spread cron dcd dcdchkgracefulshutdown dcdshutdown
display-manager getty@ hpe-auto-config hpe_irqbalance issue-generator kbdsettings kdump
kdump-early kdump-notify klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog
smartd sshd systemd-pstore vgauthd vmblock-fuse vmtoolsd vsftpd wicked wickedd-auto4
wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime                        systemd-fsck-root systemd-remount-fs
disabled                                accounts-daemon amavis apache2 apache2@ autofs autoyast-initscripts blk-availability
bluetooth-mesh boot-sysctl ca-certificates certmonger chrony-wait clamav-milter clamd
clamonacc console-getty cups cups-browsed cxl-monitor debug-shell ebttables
exchange-bmc-os-info firewallld fsidd gpm grub2-once haveged ipmi ipmievd irqbalance
issue-add-ssh-keys kexec-load lunmask man-db-create mariadb mariadb@ multipathd named
ndctl-monitor nfs nfs-blkmap nfs-server nfsserver nmb ostree-remount rpcbind
rpmconfigcheck rsyncd rtkit-daemon smartd_generate_opts smb snmpd snmptrapd spamd spampd
speech-dispatcherd srp_daemon srp_daemon_port@ sysstat systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-sysexit systemd-time-wait-sync
systemd-timesyncd tuned udisks2 update-system-flatpaks upower vncserver@ winbind ypbind
indirect                                serial-getty@ systemd-userdbd tftp wickedd
-----
```

```
-----
14. Linux kernel boot-time arguments, from /proc/cmdline
-----
```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**HPE Compute Scale-up Server 3200**

(2.10 GHz, Intel Xeon Platinum 8454H)

**SPECrate®2017\_int\_base = 4100**

**SPECrate®2017\_int\_peak = 4240**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2025

**Hardware Availability:** Sep-2023

**Software Availability:** Feb-2025

## Platform Notes (Continued)

```

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.23.38-default
root=UUID=3f2deed0-2789-4a6c-ba7e-4dc1feba6765
rd.auto=1
console=ttyS0,115200n8
selinux=0
security=
splash=silent
mitigations=auto
console=ttyS0,115200
udev.children-max=512
nmi_watchdog=0
uv_nmi.action=kdump
add_efi_memmap
tsc=nowatchdog
earlyprintk=ttyS0,115200
log_buf_len=8M
numa_balancing=disable
pci=norom
crashkernel=2G,high
watchdog_thresh=60
workqueue.watchdog_thresh=120

```

### 15. cpupower frequency-info

analyzing CPU 203:

```

current policy: frequency should be within 800 MHz and 3.40 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

```

boost state support:

```

Supported: yes
Active: yes

```

### 16. tuned-adm active

```

It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: throughput-performance

```

### 17. sysctl

```

kernel.numa_balancing          0
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                    60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode           0

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200  
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017\_int\_base = 4100

SPECrate®2017\_int\_peak = 4240

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2025  
**Hardware Availability:** Sep-2023  
**Software Availability:** Feb-2025

## Platform Notes (Continued)

18. /sys/kernel/mm/transparent\_hugepage  
defrag always defer defer+madvice [madvice] never  
enabled [always] madvice never  
hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force

19. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000

20. OS release  
From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP6  
hpe-foundation-release HPE Foundation Software 2.5.4, Build 753.1560.241029T0100.a.sles15sp6hpe-241029T0100

21. Disk information  
SPEC is set to: /home/cpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sdb2 xfs 5.9T 31G 5.8T 1% /

22. /sys/devices/virtual/dmi/id  
Vendor: HPE  
Product: Compute Scale-up Server 3200  
Product Family: 1590PID03030201  
Serial: 5UF424K4VF-000

23. dmidecode  
Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
88x Hynix HMC94AEBRA123N 64 GB 2 rank 4800, configured at 4400  
100x Micron MTC40F2046S1RC48BA1 MHCC 64 GB 2 rank 4800, configured at 4400  
68x Micron MTC40F2046S1RC48BA1 MHFF 64 GB 2 rank 4800, configured at 4400

24. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: HPE  
BIOS Version: Bundle:1.55.40-20250129\_060251 SFW:009.036.009.000.2501270505  
BIOS Date: 01/27/2025

## Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
=====

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**HPE Compute Scale-up Server 3200**

(2.10 GHz, Intel Xeon Platinum 8454H)

**SPECrate®2017\_int\_base = 4100**

**SPECrate®2017\_int\_peak = 4240**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2025

**Hardware Availability:** Sep-2023

**Software Availability:** Feb-2025

## Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====  
C | 502.gcc\_r(peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbnk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====  
Fortran | 548.exchange2\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**HPE Compute Scale-up Server 3200**

(2.10 GHz, Intel Xeon Platinum 8454H)

**SPECrate®2017\_int\_base = 4100**

**SPECrate®2017\_int\_peak = 4240**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2025

**Hardware Availability:** Sep-2023

**Software Availability:** Feb-2025

## Base Portability Flags

```

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502 gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

## Base Optimization Flags

C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

```

C++ benchmarks:

```

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

```

Fortran benchmarks:

```

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**HPE Compute Scale-up Server 3200**

(2.10 GHz, Intel Xeon Platinum 8454H)

**SPECrate®2017\_int\_base = 4100**

**SPECrate®2017\_int\_peak = 4240**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2025

**Hardware Availability:** Sep-2023

**Software Availability:** Feb-2025

## Peak Portability Flags

```

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

## Peak Optimization Flags

C benchmarks:

```

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo

502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.1/lib32 -std=gnu89
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemallo

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**HPE Compute Scale-up Server 3200**

(2.10 GHz, Intel Xeon Platinum 8454H)

**SPECrate®2017\_int\_base = 4100**

**SPECrate®2017\_int\_peak = 4240**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2025

**Hardware Availability:** Sep-2023

**Software Availability:** Feb-2025

## Peak Optimization Flags (Continued)

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SDSS-rev1.0.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SDSS-rev1.0.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-01 14:06:31-0500.

Report generated on 2025-03-26 10:33:31 by CPU2017 PDF formatter v6716.

Originally published on 2025-03-25.