



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)


HPE Compute Scale-up Server 3200  
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017\_int\_base = 3760

SPECrate®2017\_int\_peak = 3880

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Feb-2025  
Hardware Availability: Sep-2023  
Software Availability: Jan-2025

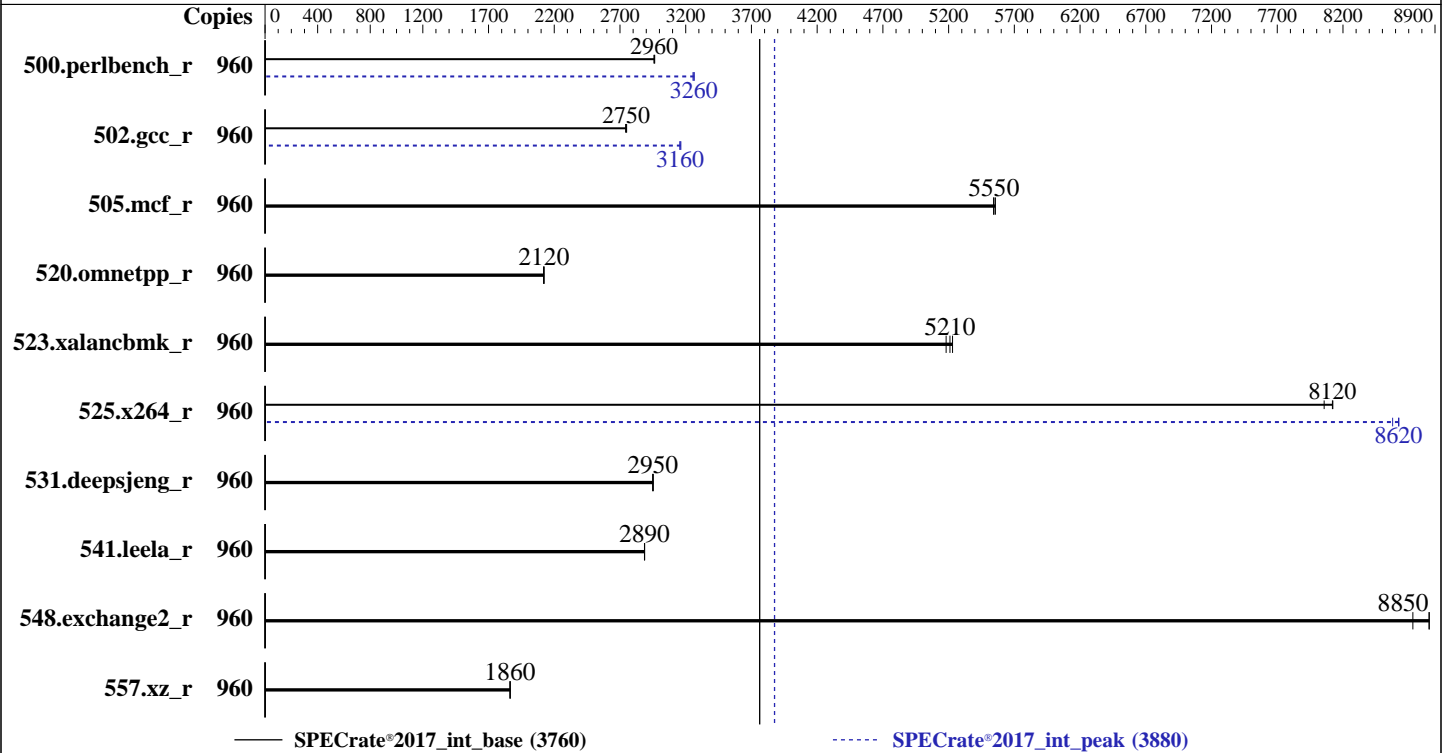

### Hardware

CPU Name: Intel Xeon Platinum 8490H  
Max MHz: 3500  
Nominal: 1900  
Enabled: 480 cores, 8 chips, 2 threads/core  
Orderable: 4, 8 chip(s)  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 112.5 MB I+D on chip per chip  
Other: None  
Memory: 4 TB (64 x 64 GB 2Rx4 PC5-4800B-R)  
Storage: 1 x 1.5 TB NVMe SSD  
Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
Kernel 6.4.0-150600.23.33-default  
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;  
Parallel: No  
Firmware: HPE Firmware Bundle Version 1.55.40 01/27/2025 released  
Jan-2025  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### HPE Compute Scale-up Server 3200

(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017\_int\_base = 3760

SPECrate®2017\_int\_peak = 3880

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Feb-2025  
Hardware Availability: Sep-2023  
Software Availability: Jan-2025

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	960	<b>516</b>	<b>2960</b>	516	2960	516	2960	960	468	3260	<b>469</b>	<b>3260</b>	469	3260
502.gcc_r	960	<b>495</b>	<b>2750</b>	494	2750	496	2740	960	430	3160	<b>431</b>	<b>3160</b>	431	3160
505.mcf_r	960	<b>280</b>	<b>5550</b>	279	5560	280	5540	960	<b>280</b>	<b>5550</b>	279	5560	280	5540
520.omnetpp_r	960	594	2120	<b>594</b>	<b>2120</b>	593	2120	960	594	2120	<b>594</b>	<b>2120</b>	593	2120
523.xalancbmk_r	960	194	5230	196	5180	<b>195</b>	<b>5210</b>	960	194	5230	196	5180	<b>195</b>	<b>5210</b>
525.x264_r	960	<b>207</b>	<b>8120</b>	209	8060	207	8120	960	<b>195</b>	<b>8620</b>	196	8580	195	8630
531.deepsjeng_r	960	<b>373</b>	<b>2950</b>	373	2950	373	2950	960	<b>373</b>	<b>2950</b>	373	2950	373	2950
541.leela_r	960	551	2890	551	2890	<b>551</b>	<b>2890</b>	960	551	2890	551	2890	<b>551</b>	<b>2890</b>
548.exchange2_r	960	284	8860	288	8730	<b>284</b>	<b>8850</b>	960	284	8860	288	8730	<b>284</b>	<b>8850</b>
557.xz_r	960	<b>556</b>	<b>1860</b>	556	1860	556	1870	960	<b>556</b>	<b>1860</b>	556	1860	556	1870

SPECrate®2017\_int\_base = **3760**

SPECrate®2017\_int\_peak = **3880**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
tuned-adm profile was set to throughput-performance using "tuned-adm profile throughput-performance"
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**HPE Compute Scale-up Server 3200**

(1.90 GHz, Intel Xeon Platinum 8490H)

**SPECrate®2017\_int\_base = 3760**

**SPECrate®2017\_int\_peak = 3880**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2025

**Hardware Availability:** Sep-2023

**Software Availability:** Jan-2025

## General Notes (Continued)

is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Configuration:

Workload Profile set to Custom

Energy/Performance Bias set to Maximum Performance

Energy Efficient Turbo set to Disabled

Advanced Memory Protection set to Advanced ECC Support

SR-IOV set to Disabled

Intel Virtualization Technology (Intel VT, VT-x) set to Disabled

Adjacent Sector Prefetch set to Disabled

DCU Stream Prefetcher set to Disabled

Last Level Cache (LLC) Dead Line Allocation set to Disabled

Enhanced Processor Performance Profile set to Aggressive

Memory Patrol Scrubbing set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on sph-187 Mon Feb 24 11:48:55 2025

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.21+suse.135.geddf52fb14)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent\_hugepage
19. /sys/kernel/mm/transparent\_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

-----

1. uname -a  
Linux sph-187 6.4.0-150600.23.33-default #1 SMP PREEMPT\_DYNAMIC Thu Jan 9 14:10:22 UTC 2025 (ba46628)  
x86\_64 x86\_64 x86\_64 GNU/Linux

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**HPE Compute Scale-up Server 3200**

(1.90 GHz, Intel Xeon Platinum 8490H)

**SPECrate®2017\_int\_base = 3760**

**SPECrate®2017\_int\_peak = 3880**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2025

**Hardware Availability:** Sep-2023

**Software Availability:** Jan-2025

## Platform Notes (Continued)

```
-----
2. w
  11:48:55 up 6 min,  1 user,  load average: 0.36, 0.64, 0.40
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
test     ttyS0    -             11:46    2:23   0.03s  0.02s  login -- test
test     pts/0    -             11:46    6.00s  1.38s  0.01s  sudo su
```

```
-----
3. Username
  From environment variable $USER:  root
  From the command 'logname':      test
```

```
-----
4. ulimit -a
  core file size          (blocks, -c) 0
  data seg size           (kbytes, -d) unlimited
  scheduling priority     (-e) 0
  file size               (blocks, -f) unlimited
  pending signals         (-i) 16249895
  max locked memory       (kbytes, -l) 8192
  max memory size         (kbytes, -m) unlimited
  open files              (-n) 40000
  pipe size               (512 bytes, -p) 8
  POSIX message queues    (bytes, -q) 819200
  real-time priority      (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time                (seconds, -t) unlimited
  max user processes      (-u) 16249895
  virtual memory          (kbytes, -v) unlimited
  file locks              (-x) unlimited
```

```
-----
5. sysinfo process ancestry
  /usr/lib/systemd/systemd --switched-root --system --deserialize=42
  login -- test
  -bash
  sudo su
  sudo su
  su
  bash
  bash
  runcpu --nobuild --action validate --define default-platform-flags --define numcopies=960 -c
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=480 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
  runcpu --nobuild --action validate --define default-platform-flags --define numcopies=960 --configfile
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=480 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
  --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.013/templogs/preenv.intrate.013.0.log --lognum 013.0 --from_runcpu 2
  specperl $SPEC/bin/sysinfo
  $SPEC = /home/cpu2017
```

```
-----
6. /proc/cpuinfo
  model name      : Intel(R) Xeon(R) Platinum 8490H
  vendor_id      : GenuineIntel
  cpu family     : 6
  model          : 143
  stepping       : 6
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### HPE Compute Scale-up Server 3200

(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017\_int\_base = 3760

SPECrate®2017\_int\_peak = 3880

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2025  
**Hardware Availability:** Sep-2023  
**Software Availability:** Jan-2025

## Platform Notes (Continued)

```

microcode      : 0x2b000620
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
cpu cores     : 60
siblings      : 120
8 physical ids (chips)
960 processors (hardware threads)
physical id 0: core ids 0-59
physical id 1: core ids 0-59
physical id 2: core ids 0-59
physical id 3: core ids 0-59
physical id 4: core ids 0-59
physical id 5: core ids 0-59
physical id 6: core ids 0-59
physical id 7: core ids 0-59
physical id 0: apicids 0-119
physical id 1: apicids 128-247
physical id 2: apicids 256-375
physical id 3: apicids 384-503
physical id 4: apicids 512-631
physical id 5: apicids 640-759
physical id 6: apicids 768-887
physical id 7: apicids 896-1015

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                960
On-line CPU(s) list:  0-959
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) Platinum 8490H
CPU family:            6
Model:                 143
Thread(s) per core:   2
Core(s) per socket:   60
Socket(s):             8
Stepping:              6
CPU(s) scaling MHz:   24%
CPU max MHz:          3500.0000
CPU min MHz:          800.0000
BogoMIPS:              3800.02
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpelgb rdtscp lm constant_tsc arch_perfmon pebs bts rep_good nopl
xtopology nonstop_tsc cpuid aperfmperf pni pclmulqdq dtes64 monitor
ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f
avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd
sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsavec cqm_llc
cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200  
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017\_int\_base = 3760

SPECrate®2017\_int\_peak = 3880

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Feb-2025  
**Hardware Availability:** Sep-2023  
**Software Availability:** Jan-2025

## Platform Notes (Continued)

```
hwp_act_window hwp_pkg_req avx512vbmi umip pku ospke waitpkg
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri
movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr
ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_lld
arch_capabilities
```

```
L1d cache: 22.5 MiB (480 instances)
L1i cache: 15 MiB (480 instances)
L2 cache: 960 MiB (480 instances)
L3 cache: 900 MiB (8 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-59,480-539
NUMA node1 CPU(s): 60-119,540-599
NUMA node2 CPU(s): 120-179,600-659
NUMA node3 CPU(s): 180-239,660-719
NUMA node4 CPU(s): 240-299,720-779
NUMA node5 CPU(s): 300-359,780-839
NUMA node6 CPU(s): 360-419,840-899
NUMA node7 CPU(s): 420-479,900-959
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
PBR SB-eIBRS SW sequence; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

```
From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d 48K 22.5M 12 Data 1 64 1 64
L1i 32K 15M 8 Instruction 1 64 1 64
L2 2M 960M 16 Unified 2 2048 1 64
L3 112.5M 900M 15 Unified 3 122880 1 64
```

```
-----
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0-59,480-539
node 0 size: 507180 MB
node 0 free: 505810 MB
node 1 cpus: 60-119,540-599
node 1 size: 508062 MB
node 1 free: 505532 MB
node 2 cpus: 120-179,600-659
node 2 size: 508062 MB
node 2 free: 507019 MB
node 3 cpus: 180-239,660-719
node 3 size: 508062 MB
node 3 free: 507061 MB
node 4 cpus: 240-299,720-779
node 4 size: 508024 MB
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**HPE Compute Scale-up Server 3200**

(1.90 GHz, Intel Xeon Platinum 8490H)

**SPECrate®2017\_int\_base = 3760**

**SPECrate®2017\_int\_peak = 3880**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2025

**Hardware Availability:** Sep-2023

**Software Availability:** Jan-2025

## Platform Notes (Continued)

```

node 4 free: 507157 MB
node 5 cpus: 300-359,780-839
node 5 size: 508062 MB
node 5 free: 507436 MB
node 6 cpus: 360-419,840-899
node 6 size: 508062 MB
node 6 free: 507415 MB
node 7 cpus: 420-479,900-959
node 7 size: 506991 MB
node 7 free: 506312 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10  16  16  18  40  40  40  40
  1:  16  10  18  16  40  40  40  40
  2:  16  18  10  16  40  40  40  40
  3:  18  16  16  10  40  40  40  40
  4:  40  40  40  40  10  16  16  18
  5:  40  40  40  40  16  10  18  16
  6:  40  40  40  40  16  18  10  16
  7:  40  40  40  40  18  16  16  10

```

```

9. /proc/meminfo
   MemTotal:      4160009772 kB

```

```

10. who -r
    run-level 3 Feb 24 11:44

```

```

11. Systemd service manager version: systemd 254 (254.21+suse.135.geddf52fb14)
    Default Target Status
    multi-user      degraded

```

```

12. Failed units, from systemctl list-units --state=failed
    UNIT                                LOAD    ACTIVE SUB    DESCRIPTION
* dcdchkgracefulshutdown.service      loaded failed failed Check if previous system shutdown was graceful
* postfix.service                     loaded failed failed Postfix Mail Transport Agent

```

```

13. Services, from systemctl list-unit-files
    STATE      UNIT FILES
enabled      YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth chronyd
             cpuset_cpunodemap cpuset_memory_spread cron dcd dcdchkgracefulshutdown dcdshutdown
             display-manager getty@ hpe-auto-config hpe_irqbalance issue-generator kbdsettings kdump
             kdump-early kdump-notify klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog
             smartd sshd systemd-pstore vgauthd vmblock-fuse vmtoolsd vsftpd wicked wickedd-auto4
             wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime
disabled     systemd-fsck-root systemd-remount-fs
             accounts-daemon amavis apache2 apache2@ autofs autoyast-initscripts blk-availability
             bluetooth-mesh boot-sysctl ca-certificates certmonger chrony-wait clamav-milter clamd
             clamonacc console-getty cups cups-browsed cxl-monitor debug-shell ebttables
             exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged ipmi ipmievdev irqbalance
             issue-add-ssh-keys kexec-load lunmask man-db-create mariadb mariadb@ multipathd named
             ndctl-monitor nfs nfs-blkmap nfs-server nfsserver nmb ostree-remount rpcbind
             rpmconfigcheck rsyncd rtkit-daemon smartd_generate_opts smb snmpd snmptrapd spamd spampd
             speech-dispatcherd srp_daemon srp_daemon_port@ sysstat systemd-boot-check-no-failures
             systemd-confext systemd-network-generator systemd-sysextd systemd-time-wait-sync
             systemd-timesyncd tuned udisks2 update-system-flatpaks upower vncserver@ winbind ypbind

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**HPE Compute Scale-up Server 3200**

(1.90 GHz, Intel Xeon Platinum 8490H)

**SPECrate®2017\_int\_base = 3760**

**SPECrate®2017\_int\_peak = 3880**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2025

**Hardware Availability:** Sep-2023

**Software Availability:** Jan-2025

## Platform Notes (Continued)

indirect pcsd serial-getty@ systemd-userdbd tftp wickedd

-----  
14. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.23.33-default
root=UUID=8ce0406a-9f17-47c0-afbc-27e5delleecb
rd.auto=1
console=ttyS0,115200n8
selinux=0
security=
splash=silent
mitigations=auto
console=ttyS0,115200
udev.children-max=512
nmi_watchdog=0
uv_nmi.action=kdump
add_efi_memmap
tsc=nowatchdog
earlyprintk=ttyS0,115200
log_buf_len=8M
numa_balancing=disable
crashkernel=1G,high
```

-----  
15. cpupower frequency-info

```
analyzing CPU 52:
  current policy: frequency should be within 800 MHz and 3.50 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
```

-----  
16. tuned-adm active

```
Current active profile: throughput-performance
```

-----  
17. sysctl

```
kernel.numa_balancing          0
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                  10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

-----  
(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**HPE Compute Scale-up Server 3200**

(1.90 GHz, Intel Xeon Platinum 8490H)

**SPECrate®2017\_int\_base = 3760**

**SPECrate®2017\_int\_peak = 3880**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2025

**Hardware Availability:** Sep-2023

**Software Availability:** Jan-2025

## Platform Notes (Continued)

```

18. /sys/kernel/mm/transparent_hugepage
    defrag          always defer defer+madvice [madvice] never
    enabled         [always] madvice never
    hpage_pmd_size  2097152
    shmem_enabled   always within_size advise [never] deny force

```

```

-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs  60000
    defrag                  1
    max_ptes_none          511
    max_ptes_shared        256
    max_ptes_swap          64
    pages_to_scan          4096
    scan_sleep_millisecs   10000

```

```

-----
20. OS release
    From /etc/*-release /etc/*-version
    os-release              SUSE Linux Enterprise Server 15 SP6
    hpe-foundation-release  HPE Foundation Software 2.5.4, Build 753.1560.241029T0100.a.sles15sp6hpe-241029T0100

```

```

-----
21. Disk information
    SPEC is set to: /home/cpu2017
    Filesystem  Type  Size  Used Avail Use% Mounted on
    /dev/nvme2n1p2  xfs  1.5T  42G  1.5T   3% /

```

```

-----
22. /sys/devices/virtual/dmi/id
    Vendor:      HPE
    Product:     Compute Scale-up Server 3200
    Product Family: 1590PID03030201
    Serial:      5UF2491355-000

```

```

-----
23. dmidecode
    Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
    64x Samsung M321R8GA0BB0-CQKZH 64 GB 2 rank 4800

```

```

-----
24. BIOS
    (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:      HPE
    BIOS Version:     Bundle:1.55.40-20250129_060251 SFW:009.036.009.000.2501270505
    BIOS Date:        01/27/2025

```

## Compiler Version Notes

C | 502.gcc\_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**HPE Compute Scale-up Server 3200**

(1.90 GHz, Intel Xeon Platinum 8490H)

**SPECrate®2017\_int\_base = 3760**

**SPECrate®2017\_int\_peak = 3880**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2025

**Hardware Availability:** Sep-2023

**Software Availability:** Jan-2025

## Compiler Version Notes (Continued)

```
=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
      | 557.xz_r(base, peak)
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====
```

```
=====
C      | 502.gcc_r(peak)
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====
```

```
=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
      | 557.xz_r(base, peak)
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====
```

```
=====
C++   | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
      | 541.leela_r(base, peak)
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====
```

```
=====
Fortran | 548.exchange2_r(base, peak)
=====
```

```
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====
```

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**HPE Compute Scale-up Server 3200**

(1.90 GHz, Intel Xeon Platinum 8490H)

**SPECrate®2017\_int\_base = 3760**

**SPECrate®2017\_int\_peak = 3880**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2025

**Hardware Availability:** Sep-2023

**Software Availability:** Jan-2025

## Base Portability Flags

```

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

## Base Optimization Flags

C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

```

C++ benchmarks:

```

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

```

Fortran benchmarks:

```

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**HPE Compute Scale-up Server 3200**

(1.90 GHz, Intel Xeon Platinum 8490H)

**SPECrate®2017\_int\_base = 3760**

**SPECrate®2017\_int\_peak = 3880**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2025

**Hardware Availability:** Sep-2023

**Software Availability:** Jan-2025

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo

502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.1/lib32 -std=gnu89
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemallo

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**HPE Compute Scale-up Server 3200**

(1.90 GHz, Intel Xeon Platinum 8490H)

**SPECrate®2017\_int\_base = 3760**

**SPECrate®2017\_int\_peak = 3880**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Feb-2025

**Hardware Availability:** Sep-2023

**Software Availability:** Jan-2025

## Peak Optimization Flags (Continued)

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SDSS-rev1.0.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SDSS-rev1.0.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-02-24 12:48:54-0500.

Report generated on 2025-03-26 10:33:31 by CPU2017 PDF formatter v6716.

Originally published on 2025-03-25.