



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 3010

PowerEdge M7725 (AMD EPYC 9965 192-Core Processor)

SPECrate®2017\_int\_peak = 3200

CPU2017 License: 6573


Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Feb-2025

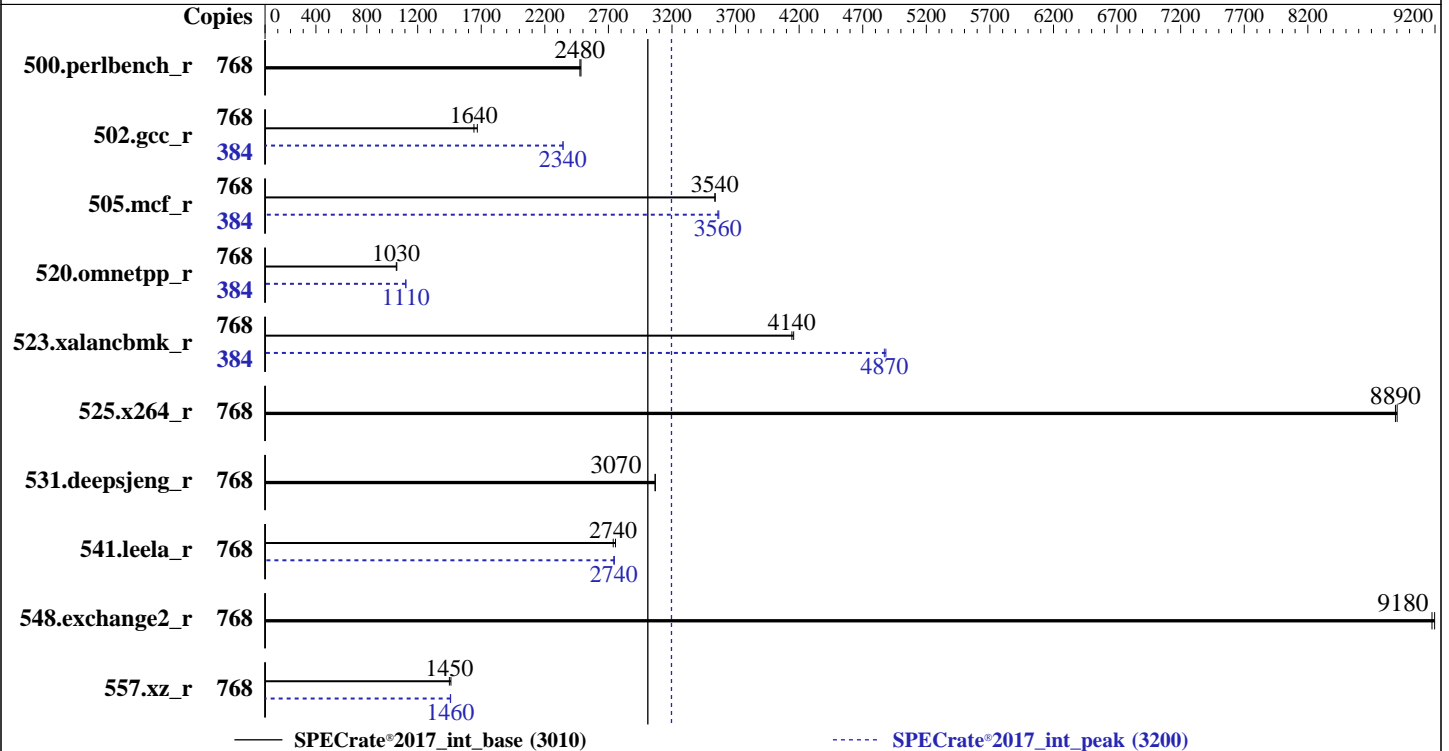

### Hardware

CPU Name: AMD EPYC 9965  
 Max MHz: 3700  
 Nominal: 2250  
 Enabled: 384 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 384 MB I+D on chip per chip, 32 MB shared / 16 cores  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)  
 Storage: 340 GB on tmpfs  
 Other: CPU Cooling: DLC

### Software

OS: Ubuntu 24.04.2 LTS  
 6.8.0-53-generic  
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC  
 Parallel: No  
 Firmware: Version 1.0.0 released Jan-2025  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 3010

PowerEdge M7725 (AMD EPYC 9965 192-Core Processor)

SPECrate®2017\_int\_peak = 3200

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Mar-2025  
Hardware Availability: Mar-2025  
Software Availability: Feb-2025

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	768	492	2480	<b>494</b>	<b>2480</b>			768	492	2480	<b>494</b>	<b>2480</b>		
502.gcc_r	768	652	1670	<b>662</b>	<b>1640</b>			384	<b>232</b>	<b>2340</b>	232	2340		
505.mcf_r	768	351	3540	<b>351</b>	<b>3540</b>			384	<b>174</b>	<b>3560</b>	174	3570		
520.omnetpp_r	768	972	1040	<b>976</b>	<b>1030</b>			384	455	1110	<b>455</b>	<b>1110</b>		
523.xalancbmk_r	768	<b>196</b>	<b>4140</b>	195	4160			384	83.1	4880	<b>83.3</b>	<b>4870</b>		
525.x264_r	768	151	8900	<b>151</b>	<b>8890</b>			768	151	8900	<b>151</b>	<b>8890</b>		
531.deepsjeng_r	768	287	3070	<b>287</b>	<b>3070</b>			768	287	3070	<b>287</b>	<b>3070</b>		
541.leela_r	768	462	2760	<b>465</b>	<b>2740</b>			768	463	2750	<b>464</b>	<b>2740</b>		
548.exchange2_r	768	219	9200	<b>219</b>	<b>9180</b>			768	219	9200	<b>219</b>	<b>9180</b>		
557.xz_r	768	<b>572</b>	<b>1450</b>	567	1460			768	568	1460	<b>569</b>	<b>1460</b>		

SPECrate®2017\_int\_base = 3010

SPECrate®2017\_int\_peak = 3200

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 3010

PowerEdge M7725 (AMD EPYC 9965 192-Core Processor)

SPECrate®2017\_int\_peak = 3200

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Feb-2025

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1/amd_rate_aocc500_znver5_A_lib/lib:/mnt/ramdisk/cpu2017-1
  .1.9-aocc500-znerv5_A1/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalancbmk\_r peak run:

```
MALLOC_CONF = "thp:always"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 340 GB ramdisk created with the cmd: "mount -t tmpfs -o size=340G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS Settings:

Virtualization Technology : Disabled  
NUMA Nodes Per Socket : 4

System Profile : Custom  
C-States : Disabled

Memory Patrol Scrub : Disabled  
PCI ASPM L1 Link Power Management : Disabled  
Periodic Directory Rinse Tuning : Blended

Determinism Control : Manual  
Determinism Slider : Power Determinism  
Optimizer Mode : Enabled

Adaptive Allocation : Enabled  
Dram Refresh Delay : Performance

DIMM Self Healing -  
on Uncorrectable Memory Error : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5\_A1/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on M772501-M7725 Wed Mar 5 19:52:11 2025

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 3010

PowerEdge M7725 (AMD EPYC 9965 192-Core Processor)

SPECrate®2017\_int\_peak = 3200

**CPU2017 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Mar-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Feb-2025

## Platform Notes (Continued)

- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.5)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent\_hugepage
- 18. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
1. uname -a
Linux M772501-M7725 6.8.0-53-generic #55-Ubuntu SMP PREEMPT_DYNAMIC Fri Jan 17 15:37:52 UTC 2025 x86_64
x86_64 x86_64 GNU/Linux
```

```
2. w
19:52:11 up 18 min,  2 users,  load average: 64.08, 389.63, 295.22
USER  TTY      FROM             LOGIN@   IDLE   JCPU   PCPU   WHAT
root  tty1    -                19:34   26.00s  1.68s  0.51s  /bin/bash ./amd_rate_aocc500_znver5_A1.sh
root  tty2    -                19:35   51.00s  0.05s  ?      -bash
```

```
3. Username
From environment variable $USER:  root
```

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            6187514
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
```

```
5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
/bin/bash /home/DellFiles/bin/DELL_rate.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/AMD/dell-run-specccpu.sh rate --define DL-VERS=6.1a --output_format
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 3010

PowerEdge M7725 (AMD EPYC 9965 192-Core Processor)

SPECrate®2017\_int\_peak = 3200

CPU2017 License: 6573

Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Feb-2025

## Platform Notes (Continued)

```

html, pdf, txt
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define DL-BIOS-NPS=4
--define DL-VERS=6.1a --output_format html, pdf, txt intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-NPS=4 --define DL-VERS=6.1a --output_format html, pdf, txt --nopower --runmode rate --tune base:peak
--size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/temlogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1

```

```

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9965 192-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 17
stepping       : 0
microcode      : 0xb101028
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores     : 192
siblings      : 384
2 physical ids (chips)
768 processors (hardware threads)
physical id 0: core ids 0-191
physical id 1: core ids 0-191
physical id 0: apicids 0-383
physical id 1: apicids 512-895

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                768
On-line CPU(s) list:  0-767
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       AMD
Model name:            AMD EPYC 9965 192-Core Processor
BIOS Model name:      AMD EPYC 9965 192-Core Processor           CPU @ 2.2GHz
BIOS CPU family:      107
CPU family:            26
Model:                 17
Thread(s) per core:   2
Core(s) per socket:   192
Socket(s):             2
Stepping:              0
Frequency boost:      enabled
CPU(s) scaling MHz:   61%
CPU max MHz:           3700.1951
CPU min MHz:           1500.0000
BogoMIPS:              4493.49
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 3010

PowerEdge M7725 (AMD EPYC 9965 192-Core Processor)

SPECrate®2017\_int\_peak = 3200

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Mar-2025  
**Hardware Availability:** Mar-2025  
**Software Availability:** Feb-2025

### Platform Notes (Continued)

```

pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpeext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca avx512_vp2intersect
flush_llid debug_swap

```

```

L1d cache: 18 MiB (384 instances)
L1i cache: 12 MiB (384 instances)
L2 cache: 384 MiB (384 instances)
L3 cache: 768 MiB (24 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-47,384-431
NUMA node1 CPU(s): 48-95,432-479
NUMA node2 CPU(s): 96-143,480-527
NUMA node3 CPU(s): 144-191,528-575
NUMA node4 CPU(s): 192-239,576-623
NUMA node5 CPU(s): 240-287,624-671
NUMA node6 CPU(s): 288-335,672-719
NUMA node7 CPU(s): 336-383,720-767

```

```

Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	18M	12	Data	1	64	1	64
L1i	32K	12M	8	Instruction	1	64	1	64
L2	1M	384M	16	Unified	2	1024	1	64
L3	32M	768M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.  
 available: 8 nodes (0-7)  
 node 0 cpus: 0-47,384-431

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 3010

PowerEdge M7725 (AMD EPYC 9965 192-Core Processor)

SPECrate®2017\_int\_peak = 3200

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Feb-2025

## Platform Notes (Continued)

```

node 0 size: 192584 MB
node 0 free: 186653 MB
node 1 cpus: 48-95,432-479
node 1 size: 193497 MB
node 1 free: 187998 MB
node 2 cpus: 96-143,480-527
node 2 size: 193497 MB
node 2 free: 187458 MB
node 3 cpus: 144-191,528-575
node 3 size: 193481 MB
node 3 free: 186971 MB
node 4 cpus: 192-239,576-623
node 4 size: 193454 MB
node 4 free: 187565 MB
node 5 cpus: 240-287,624-671
node 5 size: 193497 MB
node 5 free: 187591 MB
node 6 cpus: 288-335,672-719
node 6 size: 193497 MB
node 6 free: 187540 MB
node 7 cpus: 336-383,720-767
node 7 size: 193441 MB
node 7 free: 184368 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32
1:  12 10 12 12 32 32 32 32
2:  12 12 10 12 32 32 32 32
3:  12 12 12 10 32 32 32 32
4:  32 32 32 32 10 12 12 12
5:  32 32 32 32 12 10 12 12
6:  32 32 32 32 12 12 10 12
7:  32 32 32 32 12 12 12 10

```

```

-----
9. /proc/meminfo
   MemTotal:      1584078320 kB

```

```

-----
10. who -r
    run-level 3 Mar 5 19:33

```

```

-----
11. Systemd service manager version: systemd 255 (255.4-lubuntu8.5)
    Default Target   Status
    multi-user       running

```

```

-----
12. Services, from systemctl list-unit-files
STATE                               UNIT FILES
enabled                             ModemManager apparmor appport blk-availability cloud-config cloud-final cloud-init
cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
grub-common grub-initrd-fallback keyboard-setup lm-sensors lvm2-monitor multipathd
networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb
sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved
systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw vgauth
enabled-runtime                    netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled                             console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
systemd-boot-check-no-failures systemd-confext systemd-network-generator
systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 3010

PowerEdge M7725 (AMD EPYC 9965 192-Core Processor)

SPECrate®2017\_int\_peak = 3200

CPU2017 License: 6573

Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Feb-2025

## Platform Notes (Continued)

```

indirect      systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
masked        systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysex
              systemd-time-wait-sync upower
              systemd-sysupdate systemd-sysupdate-reboot uidd
cryptdisks    cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/vmlinuz-6.8.0-53-generic
root=/dev/mapper/ubuntu--vg-ubuntu--lv
ro

```

```

-----
14. cpupower frequency-info
analyzing CPU 209:
  current policy: frequency should be within 1.50 GHz and 2.25 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
    Pstate-P0: 2250MHz

```

```

-----
15. tuned-adm active
  Current active profile: latency-performance

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       3
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages      0
vm.swappiness                    1
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            1

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged

```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 3010

PowerEdge M7725 (AMD EPYC 9965 192-Core Processor)

SPECrate®2017\_int\_peak = 3200

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Mar-2025  
**Hardware Availability:** Mar-2025  
**Software Availability:** Feb-2025

### Platform Notes (Continued)

```
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
```

-----  
19. OS release  
From /etc/\*-release /etc/\*-version  
os-release Ubuntu 24.04.2 LTS

-----  
20. Disk information  
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5\_A1  
Filesystem Type Size Used Avail Use% Mounted on  
tmpfs tmpfs 340G 3.3G 337G 1% /mnt/ramdisk

-----  
21. /sys/devices/virtual/dmi/id  
Vendor: Dell Inc.  
Product: PowerEdge M7725  
Product Family: PowerEdge  
Serial: M772501

-----  
22. dmidecode  
Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
13x 80AD000080AD HMC94AHBRA277N 64 GB 2 rank 6400  
11x 80AD000080AD HMC94AHBRA480N 64 GB 2 rank 6400

-----  
23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: Dell Inc.  
BIOS Version: 1.0.0  
BIOS Date: 01/23/2025  
BIOS Revision: 1.0

### Compiler Version Notes

=====  
C | 502.gcc\_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 3010

PowerEdge M7725 (AMD EPYC 9965 192-Core Processor)

SPECrate®2017\_int\_peak = 3200

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Feb-2025

## Compiler Version Notes (Continued)

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```

```

C | 502.gcc_r(peak)

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```

```

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
  | 557.xz_r(base, peak)

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```

```

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
    | 541.leela_r(base, peak)

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```

```

Fortran | 548.exchange2_r(base, peak)

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 3010

PowerEdge M7725 (AMD EPYC 9965 192-Core Processor)

SPECrate®2017\_int\_peak = 3200

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Feb-2025

## Base Portability Flags

```

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

## Base Optimization Flags

### C benchmarks:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl

```

### C++ benchmarks:

```

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl

```

### Fortran benchmarks:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl

```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 3010

PowerEdge M7725 (AMD EPYC 9965 192-Core Processor)

SPECrate®2017\_int\_peak = 3200

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Feb-2025

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 3010

PowerEdge M7725 (AMD EPYC 9965 192-Core Processor)

SPECrate®2017\_int\_peak = 3200

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Feb-2025

## Peak Optimization Flags (Continued)

```
502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc
```

```
505.mcf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl
```

525.x264\_r: basepeak = yes

```
557.xz_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl
```

C++ benchmarks:

```
520.omnetpp_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination -fvirtual-function-visibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lamdalloc-ext
-ldl
```

```
523.xalancbmk_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 3010

PowerEdge M7725 (AMD EPYC 9965 192-Core Processor)

SPECrate®2017\_int\_peak = 3200

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Feb-2025

## Peak Optimization Flags (Continued)

523.xalancbmk\_r (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang
-lamdalloc-ext -ldl
```

531.deepsjeng\_r: basepeak = yes

541.leela\_r: -m64 -std=c++14

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang
-lamdalloc-ext -ldl
```

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

## Peak Other Flags

C benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

502.gcc\_r: -L/usr/lib32 -Wno-unused-command-line-argument

```
-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 3010

PowerEdge M7725 (AMD EPYC 9965 192-Core Processor)

SPECrate®2017\_int\_peak = 3200

**CPU2017 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Mar-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Feb-2025

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-05 14:52:10-0500.

Report generated on 2025-03-26 10:35:16 by CPU2017 PDF formatter v6716.

Originally published on 2025-03-25.