



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology ThinkSystem SR650 V4 (2.00 GHz, Intel Xeon 6787P)

SPECspeed®2017_fp_base =	316
SPECspeed®2017_fp_energy_base =	633
SPECspeed®2017_fp_peak =	Not Run
SPECspeed®2017_fp_energy_peak =	Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: May-2025

Software Availability: Jun-2024

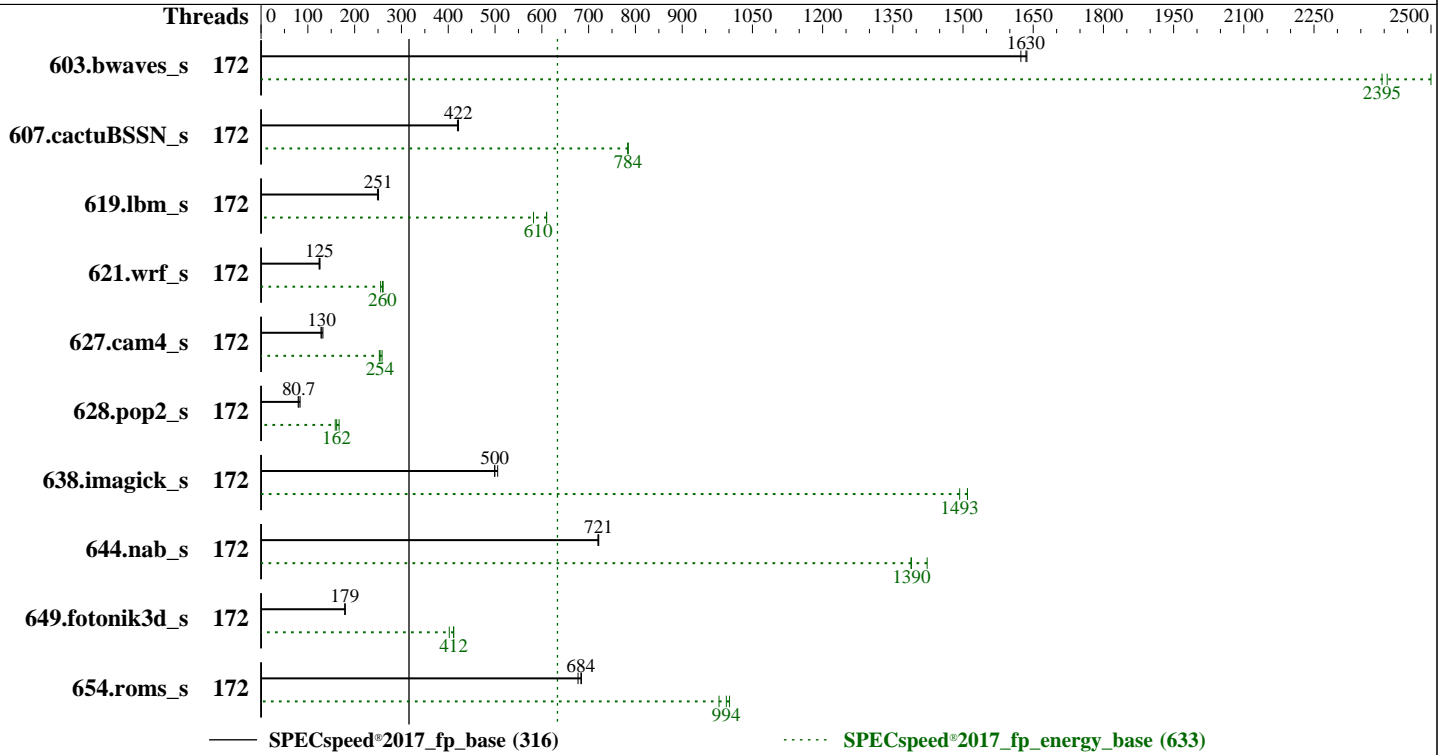

### Hardware

CPU Name: Intel Xeon 6787P  
 Max MHz: 3800  
 Nominal: 2000  
 Enabled: 172 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 64 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 336 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-88/56B-M, running at 8000)  
 Storage: 1 x 960 GB NVMe SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
 Kernel 6.4.0-150600.21-default  
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version IHE109T 1.20 released Feb-2025  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to balance power and performance

### Power

Max. Power (W): 847.6  
 Idle Power (W): 169.6  
 Min. Temperature (C): 23.50  
 Elevation (m): 43  
 Line Standard: 220 V / 50 Hz / 1 phase / 3 wires  
 Provisioning: Line-powered



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology ThinkSystem SR650 V4 (2.00 GHz, Intel Xeon 6787P)

SPECspeed®2017\_fp\_base = 316  
SPECspeed®2017\_fp\_energy\_base = 633  
SPECspeed®2017\_fp\_peak = Not Run  
SPECspeed®2017\_fp\_energy\_peak = Not Run

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Mar-2025  
Hardware Availability: May-2025  
Software Availability: Jun-2024

### Power Settings

Management FW: Version 0.97 of IHX409V  
Memory Mode: Normal

### Power-Relevant Hardware

Power Supply: 2 x 800 W (non-redundant)  
Details: ThinkSystem 800W 230V/115V Titanium Power Supply 4P57A87056  
Backplane: 8 x 2.5-inch HDD back plane  
Other Storage: None  
Storage Model #: 4XB7A93066  
NICs Installed: 1 x ThinkSystem Ethernet 4-port Adaptor @ 1 Gb  
NICs Enabled (FW/OS): 4 / 1  
NICs Connected/Speed: 1 @ 1 Gb  
Other HW Model #: 6 x Performance fans

### Power Analyzer

Power Analyzer: WIN:9888  
Hardware Vendor: YOKOGAWA, Inc.  
Model: YokogawaWT310E  
Serial Number: C3UG05013E  
Input Connection: Default  
Metrology Institute: CNAS  
Calibration By: CEPREI Calibration and Testing Center  
Calibration Label: 1GA24011968-0001  
Calibration Date: 25-Sep-2024  
PTDaemon® Version: 1.10.0 (82175bac; 2022-08-17)  
Setup Description: Connected to PSU1  
Current Ranges Used: 5A  
Voltage Range Used: 300V

### Temperature Meter

Temperature Meter: WIN:9889  
Hardware Vendor: Digi International, Inc.  
Model: DigiWATCHPORT\_H  
Serial Number: W63181846  
Input Connection: USB  
PTDaemon Version: 1.10.0 (82175bac; 2022-08-17)  
Setup Description: 50 mm in front of SUT main intake

## Base Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
603.bwaves_s	172	36.3	1620	25.7	2500	709	772	36.1	1640	26.7	2410	742	780	<b>36.1</b>	<b>1630</b>	<b>26.9</b>	<b>2400</b>	<b>744</b>	<b>782</b>
607.cactuBSSN_s	172	<b>39.5</b>	<b>422</b>	<b>23.3</b>	<b>784</b>	<b>588</b>	<b>617</b>	39.7	420	23.3	784	586	621	39.5	422	23.3	784	589	623
619.lbm_s	172	21.1	249	10.2	582	485	589	<b>20.9</b>	<b>251</b>	<b>9.75</b>	<b>610</b>	<b>466</b>	<b>567</b>	20.9	251	9.75	610	468	556
621.wrf_s	172	105	126	55.4	261	527	603	<b>106</b>	<b>125</b>	<b>55.6</b>	<b>260</b>	<b>525</b>	<b>602</b>	107	124	56.5	256	530	602
627.cam4_s	172	<b>68.3</b>	<b>130</b>	<b>37.9</b>	<b>254</b>	<b>555</b>	<b>616</b>	69.2	128	38.2	253	551	614	67.1	132	37.3	259	556	613
628.pop2_s	172	150	79.3	82.3	159	550	557	<b>147</b>	<b>80.7</b>	<b>80.8</b>	<b>162</b>	<b>549</b>	<b>557</b>	142	83.4	78.2	167	550	558
638.imagick_s	172	28.5	506	10.4	1510	365	742	<b>28.9</b>	<b>500</b>	<b>10.5</b>	<b>1490</b>	<b>365</b>	<b>763</b>	28.9	499	10.4	1510	360	752
644.nab_s	172	24.3	720	13.7	1390	564	609	<b>24.2</b>	<b>721</b>	<b>13.7</b>	<b>1390</b>	<b>565</b>	<b>610</b>	24.2	721	13.4	1420	551	608
649.fotonik3d_s	172	<b>50.8</b>	<b>179</b>	<b>24.9</b>	<b>412</b>	<b>489</b>	<b>746</b>	50.9	179	24.9	411	489	741	50.7	180	25.5	402	502	751
654.roms_s	172	23.0	685	17.6	1000	765	842	<b>23.0</b>	<b>684</b>	<b>17.7</b>	<b>994</b>	<b>769</b>	<b>848</b>	23.2	677	18.0	979	774	839

SPECspeed®2017\_fp\_base = 316

SPECspeed®2017\_fp\_energy\_base = 633

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology ThinkSystem SR650 V4 (2.00 GHz, Intel Xeon 6787P)

SPECspeed®2017_fp_base =	316
SPECspeed®2017_fp_energy_base =	633
SPECspeed®2017_fp_peak =	Not Run
SPECspeed®2017_fp_energy_peak =	Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: May-2025

Software Availability: Jun-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2017-1.1.9-ic2024.1/lib/intel64:/home/cpu2017-1.1.9-ic2024.1/je5.0.1-64"

MALLOC\_CONF = "retain:true"

OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:

Workload Profile set to Custom

Turbo Mode set to Disabled

Hyper-Threading set to Disabled

Sysinfo program /home/cpu2017-1.1.9-ic2024.1/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Thu Mar 6 10:54:32 2025

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info

(Continued on next page)



# SPEC CPU® 2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
**ThinkSystem SR650 V4**  
**(2.00 GHz, Intel Xeon 6787P)**

SPECspeed®2017_fp_base =	316
SPECspeed®2017_fp_energy_base =	633
SPECspeed®2017_fp_peak =	Not Run
SPECspeed®2017_fp_energy_peak =	Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2025

**Hardware Availability:** May-2025

**Software Availability:** Jun-2024

## Platform Notes (Continued)

```

15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```

```

-----
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

```

```

-----
2. w
10:54:32 up 37 min, 1 user, load average: 17.46, 88.52, 103.09
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT

```

```

-----
3. Username
From environment variable $USER:  root

```

```

-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 2062748
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 2062748
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECcpu_1.01.sh
sh Run553-compliant-ic2024.1-lin-sapphirerapids-speedfp-base-smt-off-20240308.sh
runcpu --power --nobuild --action validate --define default-platform-flags -c
ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=172 --tune base -o all --define drop_caches
fpspeed
runcpu --power --nobuild --action validate --define default-platform-flags --configfile
ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=172 --tune base --output_format all --define
drop_caches --runmode speed --tune base --size refspeed fpspeed --nopreenv --note-preenv --logfile

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology ThinkSystem SR650 V4 (2.00 GHz, Intel Xeon 6787P)

SPECspeed®2017_fp_base =	316
SPECspeed®2017_fp_energy_base =	633
SPECspeed®2017_fp_peak =	Not Run
SPECspeed®2017_fp_energy_peak =	Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2025  
**Hardware Availability:** May-2025  
**Software Availability:** Jun-2024

### Platform Notes (Continued)

```
$SPEC/tmp/CPU2017.306/templogs/preenv.fpspeed.306.0.log --lognum 306.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2024.1
```

```
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6787P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x1000380
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapsg bhi
cpu cores      : 86
siblings       : 86
2 physical ids (chips)
172 processors (hardware threads)
physical id 0: core ids 0-42,64-106
physical id 1: core ids 0-42,64-106
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,17
0,172,174,176,178,180,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212
physical id 1: apicids
256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,3
08,310,312,314,316,318,320,322,324,326,328,330,332,334,336,338,340,384,386,388,390,392,394,396,398,400,40
2,404,406,408,410,412,414,416,418,420,422,424,426,428,430,432,434,436,438,440,442,444,446,448,450,452,454
,456,458,460,462,464,466,468
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
Byte Order:        Little Endian
CPU(s):            172
On-line CPU(s) list: 0-171
Vendor ID:         GenuineIntel
BIOS Vendor ID:    Intel(R) Corporation
Model name:        Intel(R) Xeon(R) 6787P
BIOS Model name:   Intel(R) Xeon(R) 6787P UNKNOWN CPU @ 2.0GHz
BIOS CPU family:   179
CPU family:        6
Model:             173
Thread(s) per core: 1
Core(s) per socket: 86
Socket(s):         2
Stepping:          1
BogoMIPS:          4000.00
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpelgb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
```

(Continued on next page)



# SPEC CPU® 2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology ThinkSystem SR650 V4 (2.00 GHz, Intel Xeon 6787P)

SPECspeed®2017_fp_base =	316
SPECspeed®2017_fp_energy_base =	633
SPECspeed®2017_fp_peak =	Not Run
SPECspeed®2017_fp_energy_peak =	Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2025  
**Hardware Availability:** May-2025  
**Software Availability:** Jun-2024

### Platform Notes (Continued)

```
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bml hle avx2 smep bmi2 erms invpcid
rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma cflushopt
clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm
arat pln pts vnni avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni
vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
amx_int8 flush_lld arch_capabilities
```

```
Virtualization: VT-x
L1d cache: 8.1 MiB (172 instances)
L1i cache: 10.8 MiB (172 instances)
L2 cache: 344 MiB (172 instances)
L3 cache: 672 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-85
NUMA node1 CPU(s): 86-171
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

```
From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d 48K 8.1M 12 Data 1 64 1 64
L1i 64K 10.8M 16 Instruction 1 64 1 64
L2 2M 344M 16 Unified 2 2048 1 64
L3 336M 672M 16 Unified 3 344064 1 64
```

```
-----
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0-85
node 0 size: 257731 MB
node 0 free: 256883 MB
node 1 cpus: 86-171
node 1 size: 257982 MB
node 1 free: 255969 MB
node distances:
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
**ThinkSystem SR650 V4**  
**(2.00 GHz, Intel Xeon 6787P)**

SPECspeed®2017_fp_base =	316
SPECspeed®2017_fp_energy_base =	633
SPECspeed®2017_fp_peak =	Not Run
SPECspeed®2017_fp_energy_peak =	Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2025

**Hardware Availability:** May-2025

**Software Availability:** Jun-2024

## Platform Notes (Continued)

```
node 0 1
0: 10 21
1: 21 10
```

9. /proc/meminfo

MemTotal: 528090820 kB

10. who -r

run-level 3 Mar 6 10:18

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections nvmmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
generated	ntp_sync
indirect	systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=8c76b9eb-7cab-4e58-a0ba-c4f6030335e5
splash=silent
mitigations=auto
quiet
security=apparmor
```

14. cpupower frequency-info

```
analyzing CPU 11:
Unable to determine current policy
boost state support:
Supported: no
Active: no
```

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology ThinkSystem SR650 V4 (2.00 GHz, Intel Xeon 6787P)

SPECspeed®2017_fp_base =	316
SPECspeed®2017_fp_energy_base =	633
SPECspeed®2017_fp_peak =	Not Run
SPECspeed®2017_fp_energy_peak =	Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: May-2025

Software Availability: Jun-2024

### Platform Notes (Continued)

```

vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer+madvise [madvise] never
enabled        [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

```

```

-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2024.1
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p2 xfs 893G 74G 820G 9% /

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:      Lenovo
Product:     ThinkSystem SR650 V4
Product Family: ThinkSystem
Serial:      0987654321

```

```

-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
**ThinkSystem SR650 V4**  
**(2.00 GHz, Intel Xeon 6787P)**

SPECspeed®2017_fp_base =	316
SPECspeed®2017_fp_energy_base =	633
SPECspeed®2017_fp_peak =	Not Run
SPECspeed®2017_fp_energy_peak =	Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2025  
**Hardware Availability:** May-2025  
**Software Availability:** Jun-2024

## Platform Notes (Continued)

Memory:  
 16x Samsung M327R4GA3EB0-CLVXB 32 GB 2 rank 8800, configured at 8000

22. BIOS  
 (This section combines info from /sys/devices and dmidecode.)  
 BIOS Vendor: Lenovo  
 BIOS Version: IHE109T-1.20  
 BIOS Date: 02/28/2025  
 BIOS Revision: 1.20  
 Firmware Revision: 0.97

## Compiler Version Notes

```
=====
C | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
-----

C++, C, Fortran | 607.cactuBSSN_s(base)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
-----

Fortran | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
-----

Fortran, C | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
-----
```

## Base Compiler Invocation

C benchmarks:  
 icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
**ThinkSystem SR650 V4**  
**(2.00 GHz, Intel Xeon 6787P)**

SPECspeed®2017_fp_base =	316
SPECspeed®2017_fp_energy_base =	633
SPECspeed®2017_fp_peak =	Not Run
SPECspeed®2017_fp_energy_peak =	Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2025

**Hardware Availability:** May-2025

**Software Availability:** Jun-2024

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Lenovo Global Technology**  
**ThinkSystem SR650 V4**  
**(2.00 GHz, Intel Xeon 6787P)**

SPECspeed®2017_fp_base =	316
SPECspeed®2017_fp_energy_base =	633
SPECspeed®2017_fp_peak =	Not Run
SPECspeed®2017_fp_energy_peak =	Not Run

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2025

**Hardware Availability:** May-2025

**Software Availability:** Jun-2024

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-C.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-C.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

PTDaemon, SPEC CPU, and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-05 21:54:31-0500.

Report generated on 2025-03-26 10:36:48 by CPU2017 PDF formatter v6716.

Originally published on 2025-03-25.