



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor

(Test Sponsor: Meganet)

Invento i6000 EPYC (AMD EPYC 9124)

AMD EPYC 9124

SPECspeed®2017_int_base = 13.1

SPECspeed®2017_int_peak = 13.4

CPU2017 License: 6621


Test Sponsor: Meganet

Tested by: FusionStor

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

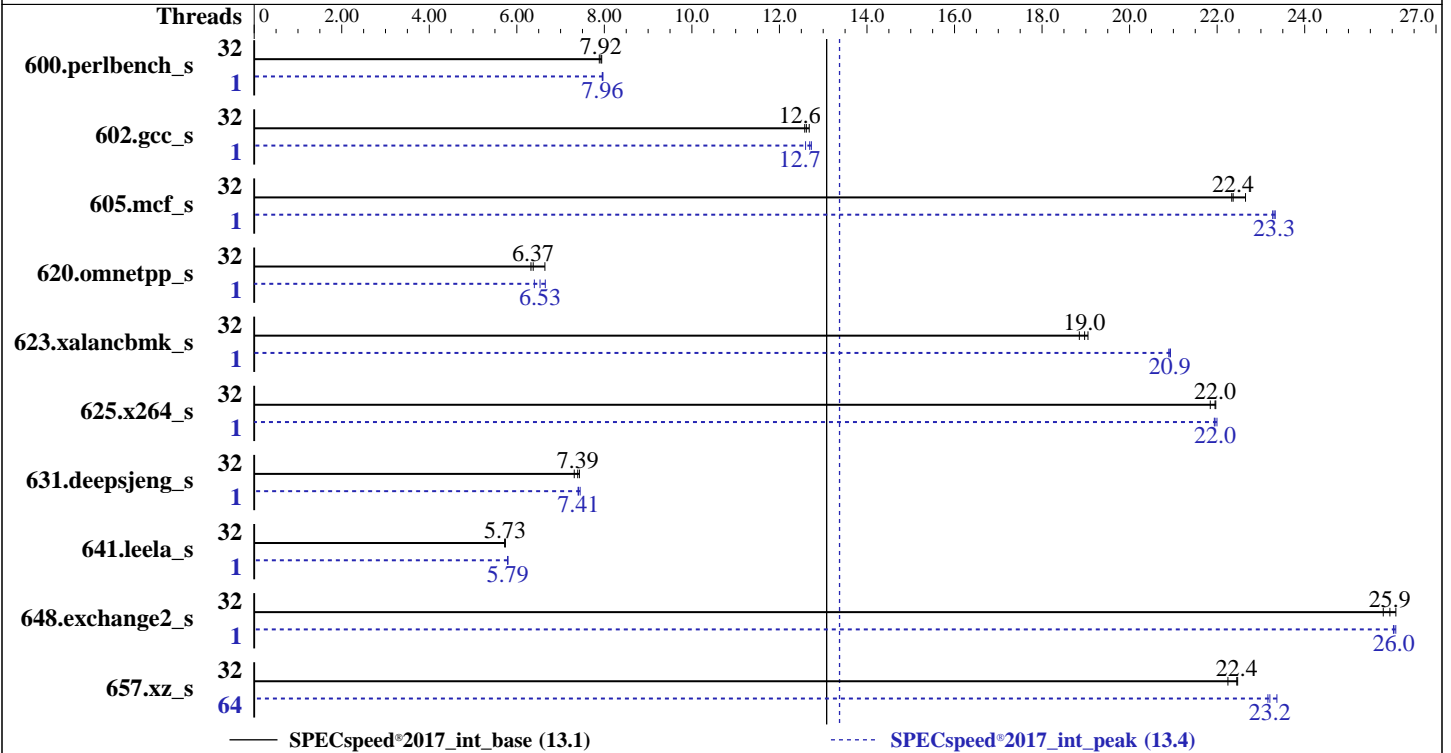

Hardware

CPU Name: AMD EPYC 9124
 Max MHz: 3700
 Nominal: 3000
 Enabled: 32 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 64 MB I+D on chip per chip, 16 MB shared / 4 cores
 Other: None
 Memory: 960 GB (15 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 960 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: Ubuntu 22.04.5 LTS
 kernel version 6.8.0-52-generic
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
 Parallel: Yes
 Firmware: Version 5.27 released Nov-2024
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: OS set to prefer performance at the expense of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor

(Test Sponsor: Meganet)

Invento i6000 EPYC (AMD EPYC 9124)

AMD EPYC 9124

SPECspeed®2017_int_base = 13.1

SPECspeed®2017_int_peak = 13.4

CPU2017 License: 6621

Test Sponsor: Meganet

Tested by: FusionStor

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	32	224	7.94	<u>224</u>	<u>7.92</u>	225	7.88	1	223	7.95	<u>223</u>	<u>7.96</u>	223	7.97
602.gcc_s	32	<u>316</u>	<u>12.6</u>	317	12.6	314	12.7	1	<u>314</u>	<u>12.7</u>	316	12.6	313	12.7
605.mcf_s	32	<u>211</u>	<u>22.4</u>	211	22.3	208	22.6	1	203	23.3	<u>203</u>	<u>23.3</u>	202	23.3
620.omnetpp_s	32	246	6.64	258	6.32	<u>256</u>	<u>6.37</u>	1	245	6.65	255	6.40	<u>250</u>	<u>6.53</u>
623.xalancbmk_s	32	75.2	18.9	<u>74.7</u>	<u>19.0</u>	74.4	19.0	1	67.7	20.9	67.8	20.9	<u>67.7</u>	<u>20.9</u>
625.x264_s	32	<u>80.4</u>	<u>22.0</u>	80.3	22.0	80.8	21.8	1	<u>80.4</u>	<u>22.0</u>	80.2	22.0	80.4	21.9
631.deepsjeng_s	32	<u>194</u>	<u>7.39</u>	193	7.43	196	7.31	1	194	7.40	192	7.45	<u>193</u>	<u>7.41</u>
641.leela_s	32	<u>298</u>	<u>5.73</u>	298	5.72	297	5.74	1	294	5.80	295	5.79	<u>294</u>	<u>5.79</u>
648.exchange2_s	32	<u>113</u>	<u>25.9</u>	113	26.1	114	25.8	1	<u>113</u>	<u>26.0</u>	113	26.0	113	26.1
657.xz_s	32	278	22.2	<u>275</u>	<u>22.4</u>	275	22.5	64	267	23.2	<u>266</u>	<u>23.2</u>	265	23.4

SPECspeed®2017_int_base = 13.1

SPECspeed®2017_int_peak = 13.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor

(Test Sponsor: Meganet)

Invento i6000 EPYC (AMD EPYC 9124)

AMD EPYC 9124

SPECspeed®2017_int_base = 13.1

SPECspeed®2017_int_peak = 13.4

CPU2017 License: 6621

Test Sponsor: Meganet

Tested by: FusionStor

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-63"

LD_LIBRARY_PATH =

"/home/speccpu/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/speccpu/cpu2017/amd_speed_aocc500_znver5_A_lib/lib32:"

LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "64"

Environment variables set by runcpu during the 600.perlbench_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 602.gcc_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 620.omnetpp_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 625.x264_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 631.deepsjeng_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 641.leela_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 648.exchange2_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz_s peak run:

GOMP_CPU_AFFINITY = "0-63"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

Platform Notes

Sysinfo program /home/speccpu/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on AMD Wed Mar 19 10:20:44 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor

(Test Sponsor: Meganet)

Invento i6000 EPYC (AMD EPYC 9124)

AMD EPYC 9124

SPECspeed®2017_int_base = 13.1

SPECspeed®2017_int_peak = 13.4

CPU2017 License: 6621

Test Sponsor: Meganet

Tested by: FusionStor

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

```

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```

```

1. uname -a
Linux AMD 6.8.0-52-generic #53~22.04.1-Ubuntu SMP PREEMPT_DYNAMIC Wed Jan 15 19:18:46 UTC 2 x86_64 x86_64
x86_64 GNU/Linux

```

```

2. w
10:20:44 up 16:15, 3 users, load average: 0.44, 0.37, 7.36
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU WHAT
test     :l        :l              Tue17   ?xdm?  4:27m  0.00s /usr/libexec/gdm-x-session --run-script env
GNOME_SHELL_SESSION_MODE=ubuntu /usr/bin/gnome-session --session=ubuntu
test     pts/1    -               Tue18   11.00s  1.93s  0.27s sudo -s
test     pts/3    -               Tue19   15:04m  0.01s  0.07s sudo -s

```

```

3. Username
From environment variable $USER:  root
From the command 'logname':      test

```

```

4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            3868763
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor

(Test Sponsor: Meganet)

Invento i6000 EPYC (AMD EPYC 9124)

AMD EPYC 9124

SPECspeed®2017_int_base = 13.1

SPECspeed®2017_int_peak = 13.4

CPU2017 License: 6621

Test Sponsor: Meganet

Tested by: FusionStor

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

```

5. sysinfo process ancestry
/sbin/init splash
/lib/systemd/systemd
/usr/libexec/gnome-terminal-server
bash
sudo -s
sudo -s
/bin/bash
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeerd
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeerd intspeerd --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intspeerd.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu/cpu2017

```

```

6. /proc/cpuinfo
-----
model name      : AMD EPYC 9124 16-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa101148
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass rsro
TLB size       : 3584 4K pages
cpu cores      : 16
siblings       : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-3,8-11,16-19,24-27
physical id 1: core ids 0-3,8-11,16-19,24-27
physical id 0: apicids 0-7,16-23,32-39,48-55
physical id 1: apicids 64-71,80-87,96-103,112-119
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

7. lscpu

```

From lscpu from util-linux 2.37.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                 64
On-line CPU(s) list:   0-63
Vendor ID:              AuthenticAMD
Model name:             AMD EPYC 9124 16-Core Processor
CPU family:             25
Model:                  17
Thread(s) per core:    2
Core(s) per socket:    16
Socket(s):              2
Stepping:               1
Frequency boost:        enabled
CPU max MHz:            3711.9141
CPU min MHz:            1500.0000
BogoMIPS:                6000.29

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor

(Test Sponsor: Meganet)

Invento i6000 EPYC (AMD EPYC 9124)

AMD EPYC 9124

SPECspeed®2017_int_base = 13.1

SPECspeed®2017_int_peak = 13.4

CPU2017 License: 6621

Test Sponsor: Meganet

Tested by: FusionStor

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

Flags:

```
fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpeext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
flushbyasid decodeassists pausefilter pthreshold avic
v_omsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
debug_swap
```

Virtualization:

AMD-V

L1d cache:

1 MiB (32 instances)

L1i cache:

1 MiB (32 instances)

L2 cache:

32 MiB (32 instances)

L3 cache:

128 MiB (8 instances)

NUMA node(s):

2

NUMA node0 CPU(s):

0-15,32-47

NUMA node1 CPU(s):

16-31,48-63

Vulnerability Gather data sampling:

Not affected

Vulnerability Itlb multihit:

Not affected

Vulnerability L1tf:

Not affected

Vulnerability Mds:

Not affected

Vulnerability Meltdown:

Not affected

Vulnerability Mmio stale data:

Not affected

Vulnerability Reg file data sampling:

Not affected

Vulnerability Retbleed:

Not affected

Vulnerability Spec rstack overflow:

Mitigation; Safe RET

Vulnerability Spec store bypass:

Mitigation; Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1:

Mitigation; usercopy/swaps barriers and __user pointer sanitization

Vulnerability Spectre v2:

Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1M	8	Data	1	64	1	64
L1i	32K	1M	8	Instruction	1	64	1	64
L2	1M	32M	8	Unified	2	2048	1	64
L3	16M	128M	16	Unified	3	16384	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0-15,32-47

node 0 size: 515739 MB

node 0 free: 513768 MB

node 1 cpus: 16-31,48-63

node 1 size: 451529 MB

node 1 free: 449858 MB

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor

(Test Sponsor: Meganet)

Invento i6000 EPYC (AMD EPYC 9124)

AMD EPYC 9124

SPECspeed®2017_int_base = 13.1

SPECspeed®2017_int_peak = 13.4

CPU2017 License: 6621

Test Sponsor: Meganet

Tested by: FusionStor

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

node distances:

```

node    0    1
0:     10   32
1:     32   10

```

```

-----
9. /proc/meminfo
   MemTotal:      990482888 kB

```

```

-----
10. who -r
    run-level 5 Mar 18 17:22

```

```

-----
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
    Default Target    Status
    graphical         running

```

```

-----
12. Services, from systemctl list-unit-files
STATE                                UNIT FILES
enabled                               ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon anacron anydesk apparmor avahi-daemon bluetooth console-setup cron cups
cups-browsed dmesg e2scrub_reap getty@ gpu-manager grub-common grub-initrd-fallback
irqbalance kerneloops keyboard-setup networkd-dispatcher openvpn power-profiles-daemon
rsyslog secureboot-db setvtrgb snapd ssh switcheroo-control systemd-oom systemd-pstore
systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw
unattended-upgrades wpa_supplicant
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled        acpid brltty console-getty debug-shell ipmievd nftables openvpn-client@ openvpn-server@
openvpn@ rsync rtkit-daemon serial-getty@ speech-dispatcherd
systemd-boot-check-no-failures systemd-network-generator systemd-networkd
systemd-networkd-wait-online systemd-sysext systemd-time-wait-sync upower
wpa_supplicant-nl80211@ wpa_supplicant-wired@ wpa_supplicant@
generated       apport openipmi speech-dispatcher
indirect         saned@ spice-vdagentd uidd
masked          alsa-utils cryptdisks cryptdisks-early hwclock pulseaudio-enable-autospawn rc rcS saned
screen-cleanup sudo x11-common

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.8.0-52-generic
root=UUID=e953dd87-e49e-4230-a412-5a6320fe39a0
ro
quiet
splash
vt.handoff=7

```

```

-----
14. cpupower frequency-info
    analyzing CPU 24:
        current policy: frequency should be within 1.50 GHz and 3.00 GHz.
                        The governor "performance" may decide which speed to use
                        within this range.

    boost state support:
        Supported: yes
        Active: yes
        Boost States: 0
        Total States: 3
        Pstate-P0: 3000MHz

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor

(Test Sponsor: Meganet)

Invento i6000 EPYC (AMD EPYC 9124)

AMD EPYC 9124

SPECspeed®2017_int_base = 13.1

SPECspeed®2017_int_peak = 13.4

CPU2017 License: 6621

Test Sponsor: Meganet

Tested by: FusionStor

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

15. sysctl

```

kernel.numa_balancing      1
kernel.randomize_va_space  0
vm.compaction_proactiveness 20
vm.dirty_background_bytes  0
vm.dirty_background_ratio  10
vm.dirty_bytes             0
vm.dirty_expire_centisecs  3000
vm.dirty_ratio             8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold       500
vm.min_unmapped_ratio     1
vm.nr_hugepages            0
vm.nr_hugepages_mempolicy  0
vm.nr_overcommit_hugepages 0
vm.swappiness              1
vm.watermark_boost_factor  15000
vm.watermark_scale_factor  10
vm.zone_reclaim_mode      1

```

16. /sys/kernel/mm/transparent_hugepage

```

defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

17. /sys/kernel/mm/transparent_hugepage/khugepaged

```

alloc_sleep_millisecs 60000
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

18. OS release

```

From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.5 LTS

```

19. Disk information

SPEC is set to: /home/speccpu/cpu2017

```

Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2  ext4 879G  37G 798G  5% /

```

20. /sys/devices/virtual/dmi/id

```

Vendor:      FusionStor
Product:     Fusionstor_Invento_i6000_EPYC_Series
Product Family: Server
Serial:      GNG6PB312A0006

```

21. dmidecode

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor

(Test Sponsor: Meganet)

Invento i6000 EPYC (AMD EPYC 9124)

AMD EPYC 9124

SPECspeed®2017_int_base = 13.1

SPECspeed®2017_int_peak = 13.4

CPU2017 License: 6621

Test Sponsor: Meganet

Tested by: FusionStor

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

15x Samsung M321R8GA0BB0-CQKZJ 64 GB 2 rank 4800
9x Unknown Unknown

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: FUSIONSTOR
BIOS Version: F18
BIOS Date: 10/11/2024
BIOS Revision: 5.27

Compiler Version Notes

C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
| 641.leela_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran | 648.exchange2_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor

(Test Sponsor: Meganet)

Invento i6000 EPYC (AMD EPYC 9124)

AMD EPYC 9124

SPECspeed®2017_int_base = 13.1

SPECspeed®2017_int_peak = 13.4

CPU2017 License: 6621

Test Sponsor: Meganet

Tested by: FusionStor

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Base Compiler Invocation (Continued)

Fortran benchmarks:

flang

Base Portability Flags

```

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc

```

C++ benchmarks:

```

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext

```

Fortran benchmarks:

```

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor

(Test Sponsor: Meganet)

Invento i6000 EPYC (AMD EPYC 9124)

AMD EPYC 9124

SPECspeed®2017_int_base = 13.1

SPECspeed®2017_int_peak = 13.4

CPU2017 License: 6621

Test Sponsor: Meganet

Tested by: FusionStor

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```

Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor

(Test Sponsor: Meganet)

Invento i6000 EPYC (AMD EPYC 9124)

AMD EPYC 9124

SPECspeed®2017_int_base = 13.1

SPECspeed®2017_int_peak = 13.4

CPU2017 License: 6621

Test Sponsor: Meganet

Tested by: FusionStor

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

```
600.perlbench_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

602.gcc_s: Same as 600.perlbench_s

```
605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

625.x264_s: Same as 600.perlbench_s

657.xz_s: Same as 600.perlbench_s

C++ benchmarks:

```
620.omnetpp_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang
```

```
623.xalancbmk_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor

(Test Sponsor: Meganet)

Invento i6000 EPYC (AMD EPYC 9124)

AMD EPYC 9124

SPECspeed®2017_int_base = 13.1

SPECspeed®2017_int_peak = 13.4

CPU2017 License: 6621

Test Sponsor: Meganet

Tested by: FusionStor

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

623.xalancbmk_s (continued):

```
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamplibm -lamdalloc-ext -lflang
```

631.deepsjeng_s: -m64 -std=c++14

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamplibm -lamdalloc -lflang
```

641.leela_s: Same as 631.deepsjeng_s

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamplibm -lamdalloc -lflang
```

Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-AMD-rev1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-AMD-rev1.xml>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor

(Test Sponsor: Meganet)

Invento i6000 EPYC (AMD EPYC 9124)

AMD EPYC 9124

SPECspeed®2017_int_base = 13.1

SPECspeed®2017_int_peak = 13.4

CPU2017 License: 6621

Test Sponsor: Meganet

Tested by: FusionStor

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-19 00:50:44-0400.
Report generated on 2025-04-22 12:00:01 by CPU2017 PDF formatter v6716.
Originally published on 2025-04-22.