



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G6
AMD EPYC 9654

SPECspeed®2017_int_base = 14.5

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 9066


Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Dec-2024

Software Availability: Dec-2024

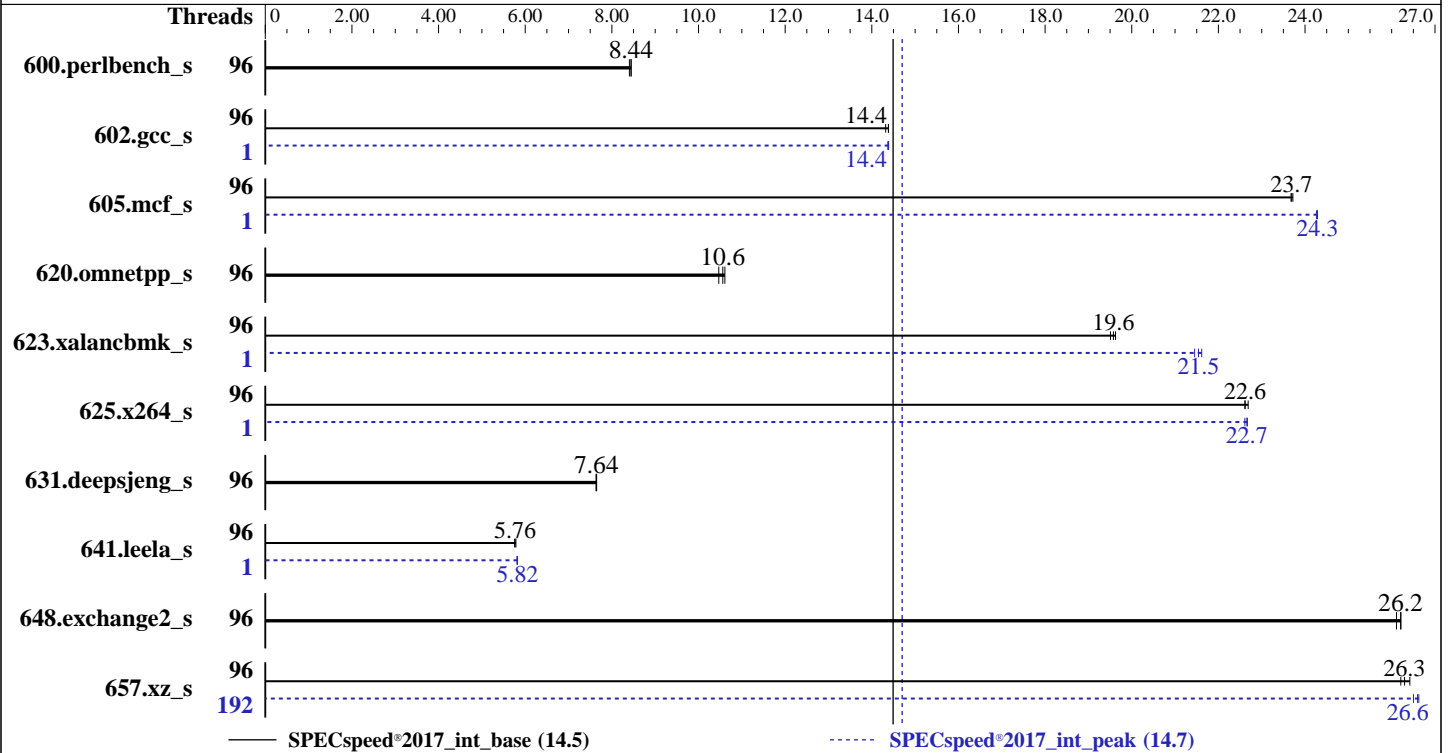

Hardware

CPU Name: AMD EPYC 9654
 Max MHz: 3700
 Nominal: 2400
 Enabled: 96 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 384 MB I+D on chip per chip, 32 MB shared / 8 cores
 Other: None
 Memory: 384 GB (12 x 32 GB 2Rx4 PC5-5600B-R, running at 4800)
 Storage: 1 x 3.84TB SSD
 Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04.1 LTS
 kernel version 6.8.0-51-generic
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
 Parallel: Yes
 Firmware: Version 6.30.37 released Feb-2025
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G6
AMD EPYC 9654

SPECspeed®2017_int_base = 14.5

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Dec-2024

Software Availability: Dec-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	96	211	8.40	210	8.44	<u>210</u>	<u>8.44</u>	96	211	8.40	210	8.44	<u>210</u>	<u>8.44</u>
602.gcc_s	96	277	14.4	<u>277</u>	<u>14.4</u>	278	14.3	1	277	14.4	277	14.4	<u>277</u>	<u>14.4</u>
605.mcf_s	96	<u>199</u>	<u>23.7</u>	199	23.7	199	23.7	1	<u>194</u>	<u>24.3</u>	195	24.3	194	24.3
620.omnetpp_s	96	<u>154</u>	<u>10.6</u>	154	10.6	156	10.5	96	<u>154</u>	<u>10.6</u>	154	10.6	156	10.5
623.xalancbmk_s	96	<u>72.4</u>	<u>19.6</u>	72.6	19.5	72.2	19.6	1	65.6	21.6	66.1	21.5	<u>65.8</u>	<u>21.5</u>
625.x264_s	96	<u>78.0</u>	<u>22.6</u>	78.0	22.6	77.8	22.7	1	<u>77.9</u>	<u>22.7</u>	78.0	22.6	77.8	22.7
631.deepsjeng_s	96	187	7.65	<u>187</u>	<u>7.64</u>	188	7.63	96	187	7.65	<u>187</u>	<u>7.64</u>	188	7.63
641.leela_s	96	296	5.76	295	5.79	<u>296</u>	<u>5.76</u>	1	<u>293</u>	<u>5.82</u>	294	5.81	293	5.82
648.exchange2_s	96	113	26.1	<u>112</u>	<u>26.2</u>	112	26.2	96	113	26.1	<u>112</u>	<u>26.2</u>	112	26.2
657.xz_s	96	<u>235</u>	<u>26.3</u>	236	26.2	234	26.4	192	232	26.6	233	26.5	<u>232</u>	<u>26.6</u>

SPECspeed®2017_int_base = **14.5**

SPECspeed®2017_int_peak = **14.7**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G6
AMD EPYC 9654

SPECspeed®2017_int_base = 14.5

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2025
Hardware Availability: Dec-2024
Software Availability: Dec-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-191"
LD_LIBRARY_PATH =
"/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib32:/usr/local/mpc-131/lib:/usr/local/gmp-630/lib:/usr/local/mpfr-421/lib:/usr/local/isl-027/lib:/usr/local/gcc-1420/lib64:/usr/local/lib:/usr/lib:/usr/local/amd/aocc-compiler-5.0.0/lib:/usr/local/amd/aocc-compiler-5.0.0/lib32"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "192"
```

Environment variables set by runcpu during the 602.gcc_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 605.mcf_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 625.x264_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 641.leela_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 657.xz_s peak run:

```
GOMP_CPU_AFFINITY = "0-191"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:

```
SMT Control set to Enabled
SVM Mode set to Disabled
Power Profile Selection set to High Performance Mode
Determinism Slider set to Power
cTDP set to 400
PPT set to 400
NUMA nodes per socket set to NPS 4
ACPI SRAT L3 cache as NUMA domain set to Enabled
```

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G6
AMD EPYC 9654

SPECspeed®2017_int_base = 14.5

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Dec-2024

Software Availability: Dec-2024

Platform Notes (Continued)

running on h3c Fri Mar 21 09:47:08 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.4)
- 12. Failed units, from systemctl list-units --state=failed
- 13. Services, from systemctl list-unit-files
- 14. Linux kernel boot-time arguments, from /proc/cmdline
- 15. cpupower frequency-info
- 16. sysctl
- 17. /sys/kernel/mm/transparent_hugepage
- 18. /sys/kernel/mm/transparent_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
1. uname -a
Linux h3c 6.8.0-51-generic #52-Ubuntu SMP PREEMPT_DYNAMIC Thu Dec 5 13:09:44 UTC 2024 x86_64 x86_64 x86_64
GNU/Linux
```

```
2. w
09:47:08 up 6:32, 1 user, load average: 0.38, 0.10, 5.80
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
root      tty1     -             03:15   20.00s 1.37s  0.15s /bin/bash ./amd_speed_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            1545922
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 14.5

H3C UniServer R3950 G6
AMD EPYC 9654

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 9066

Test Date: Mar-2025

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Dec-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Dec-2024

Platform Notes (Continued)

rtprio 0

5. sysinfo process ancestry

```

/sbin/init
/bin/login -p --
-bash
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeak
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeak --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.005/templogs/preenv.intspeak.005.0.log --lognum 005.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

6. /proc/cpuinfo

```

model name      : AMD EPYC 9654 96-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 25
model           : 17
stepping        : 1
microcode       : 0xa101154
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size        : 3584 4K pages
cpu cores       : 96
siblings        : 192
1 physical ids (chips)
192 processors (hardware threads)
physical id 0:  core ids 0-95
physical id 0:  apicids 0-191

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                192
On-line CPU(s) list:   0-191
Vendor ID:             AuthenticAMD
BIOS Vendor ID:        Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9654 96-Core Processor
BIOS Model name:       AMD EPYC 9654 96-Core Processor
BIOS CPU family:       107
CPU family:            25
Model:                 17
Thread(s) per core:    2
Core(s) per socket:    96
Socket(s):             1
Stepping:              1
Frequency boost:       enabled
CPU(s) scaling MHz:    45%
CPU max MHz:           3707.8120
CPU min MHz:           1500.0000

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G6
AMD EPYC 9654

SPECspeed®2017_int_base = 14.5

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Dec-2024

Software Availability: Dec-2024

Platform Notes (Continued)

```

BogoMIPS:          4793.47
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                  pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                  rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                  extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                  sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                  cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                  osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpeext
                  perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                  ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
                  erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                  clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                  xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                  user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
                  amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
                  flushbyasid decodeassists pausefilter pfthreshold avic
                  v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku
                  ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                  avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
                  debug_swap
L1d cache:        3 MiB (96 instances)
L1i cache:        3 MiB (96 instances)
L2 cache:         96 MiB (96 instances)
L3 cache:         384 MiB (12 instances)
NUMA node(s):    12
NUMA node0 CPU(s): 0-7,96-103
NUMA node1 CPU(s): 8-15,104-111
NUMA node2 CPU(s): 16-23,112-119
NUMA node3 CPU(s): 24-31,120-127
NUMA node4 CPU(s): 32-39,128-135
NUMA node5 CPU(s): 40-47,136-143
NUMA node6 CPU(s): 48-55,144-151
NUMA node7 CPU(s): 56-63,152-159
NUMA node8 CPU(s): 64-71,160-167
NUMA node9 CPU(s): 72-79,168-175
NUMA node10 CPU(s): 80-87,176-183
NUMA node11 CPU(s): 88-95,184-191
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:       Not affected
Vulnerability L1tf:                 Not affected
Vulnerability Mds:                  Not affected
Vulnerability Meltdown:             Not affected
Vulnerability Mmio stale data:      Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:             Not affected
Vulnerability Spec rstack overflow:  Vulnerable
Vulnerability Spec store bypass:    Vulnerable
Vulnerability Spectre v1:           Vulnerable; __user pointer sanitization and usercopy barriers only;
                                     no swapgs barriers
Vulnerability Spectre v2:           Vulnerable; IBPB: disabled; STIBP: disabled; PBR SB-eIBRS: Not
                                     affected; BHI: Not affected
Vulnerability Srbds:                 Not affected
Vulnerability Tsx async abort:      Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	3M	8	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	1M	96M	8	Unified	2	2048	1	64
L3	32M	384M	16	Unified	3	32768	1	64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 14.5

H3C UniServer R3950 G6
AMD EPYC 9654

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 9066

Test Date: Mar-2025

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Dec-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Dec-2024

Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 12 nodes (0-11)
node 0 cpus: 0-7,96-103
node 0 size: 31844 MB
node 0 free: 31401 MB
node 1 cpus: 8-15,104-111
node 1 size: 32250 MB
node 1 free: 32009 MB
node 2 cpus: 16-23,112-119
node 2 size: 32250 MB
node 2 free: 31828 MB
node 3 cpus: 24-31,120-127
node 3 size: 32250 MB
node 3 free: 31995 MB
node 4 cpus: 32-39,128-135
node 4 size: 32250 MB
node 4 free: 32010 MB
node 5 cpus: 40-47,136-143
node 5 size: 32250 MB
node 5 free: 32009 MB
node 6 cpus: 48-55,144-151
node 6 size: 32250 MB
node 6 free: 32004 MB
node 7 cpus: 56-63,152-159
node 7 size: 32250 MB
node 7 free: 31921 MB
node 8 cpus: 64-71,160-167
node 8 size: 32250 MB
node 8 free: 31985 MB
node 9 cpus: 72-79,168-175
node 9 size: 32250 MB
node 9 free: 31995 MB
node 10 cpus: 80-87,176-183
node 10 size: 32250 MB
node 10 free: 32032 MB
node 11 cpus: 88-95,184-191
node 11 size: 32202 MB
node 11 free: 31970 MB

```

node distances:

```

node  0  1  2  3  4  5  6  7  8  9 10 11
0:  10 11 11 12 12 12 12 12 12 12 12 12
1:  11 10 11 12 12 12 12 12 12 12 12 12
2:  11 11 10 12 12 12 12 12 12 12 12 12
3:  12 12 12 10 11 11 12 12 12 12 12 12
4:  12 12 12 11 10 11 12 12 12 12 12 12
5:  12 12 12 11 11 10 12 12 12 12 12 12
6:  12 12 12 12 12 12 10 11 11 12 12 12
7:  12 12 12 12 12 12 11 10 11 12 12 12
8:  12 12 12 12 12 12 11 11 10 12 12 12
9:  12 12 12 12 12 12 12 12 12 10 11 11
10:  12 12 12 12 12 12 12 12 12 11 10 11
11:  12 12 12 12 12 12 12 12 12 11 11 10

```

9. /proc/meminfo

MemTotal: 395828804 kB

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G6
AMD EPYC 9654

SPECspeed®2017_int_base = 14.5

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2025
Hardware Availability: Dec-2024
Software Availability: Dec-2024

Platform Notes (Continued)

10. who -r
run-level 3 Mar 21 03:15

11. Systemd service manager version: systemd 255 (255.4-lubuntu8.4)
Default Target Status
multi-user degraded

12. Failed units, from systemctl list-units --state=failed
UNIT LOAD ACTIVE SUB DESCRIPTION
* fwupd-refresh.service loaded failed failed Refresh fwupd metadata and update motd
Legend: LOAD -> Reflects whether the unit definition was properly loaded.
ACTIVE -> The high-level unit activation state, i.e. generalization of SUB.
SUB -> The low-level unit activation state, values depend on unit type.
1 loaded units listed.

13. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online apparmor
apport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup
cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback
keyboard-setup lm-sensors lvm2-monitor multipathd networkd-dispatcher open-iscsi
open-vm-tools pollinate rsyslog secureboot-db setvtrgb snapd sysstat systemd-networkd
systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald
ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth wpa_supplicant
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
systemd-boot-check-no-failures systemd-confext systemd-network-generator
systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysex
systemd-time-wait-sync upower wpa_supplicant-nl80211@ wpa_supplicant-wired@
wpa_supplicant@
indirect systemd-sysupdate systemd-sysupdate-reboot uuid
masked cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/vmlinuz-6.8.0-51-generic
root=UUID=5079c432-fd48-464d-92df-94ceb7591bc8
ro
iommu=pt
mitigations=off
security=none

15. cpupower frequency-info
analyzing CPU 148:
current policy: frequency should be within 1.50 GHz and 2.40 GHz.
The governor "schedutil" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes
Boost States: 0
Total States: 3
Pstate-P0: 2400MHz

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G6
AMD EPYC 9654

SPECspeed®2017_int_base = 14.5

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Dec-2024

Software Availability: Dec-2024

Platform Notes (Continued)

16. sysctl

```

kernel.numa_balancing      1
kernel.randomize_va_space  0
vm.compaction_proactiveness 20
vm.dirty_background_bytes  0
vm.dirty_background_ratio  10
vm.dirty_bytes             0
vm.dirty_expire_centisecs  3000
vm.dirty_ratio             8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold       500
vm.min_unmapped_ratio      1
vm.nr_hugepages            0
vm.nr_hugepages_mempolicy  0
vm.nr_overcommit_hugepages 0
vm.swappiness              1
vm.watermark_boost_factor  15000
vm.watermark_scale_factor  10
vm.zone_reclaim_mode       1

```

17. /sys/kernel/mm/transparent_hugepage

```

defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

18. /sys/kernel/mm/transparent_hugepage/khugepaged

```

alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

19. OS release

```

From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.1 LTS

```

20. Disk information

```

SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       ext4  3.4T   19G  3.2T   1% /

```

21. /sys/devices/virtual/dmi/id

```

Vendor:      H3C
Product:     RS33M2C9S
Product Family: Rack
Serial:      N/A

```

22. dmidecode

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G6
AMD EPYC 9654

SPECspeed®2017_int_base = 14.5

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2025
Hardware Availability: Dec-2024
Software Availability: Dec-2024

Platform Notes (Continued)

Additional information from dmidecode 3.5 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
12x Samsung M321R4GA3PB0-CWMKJ 32 GB 2 rank 5600, configured at 4800

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 6.30.37
BIOS Date: 02/28/2025
BIOS Revision: 5.27

Compiler Version Notes

C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
| 641.leela_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran | 648.exchange2_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECspeed®2017_int_base = 14.5

H3C UniServer R3950 G6
AMD EPYC 9654

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 9066

Test Date: Mar-2025

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Dec-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Dec-2024

Base Compiler Invocation (Continued)

Fortran benchmarks:

flang

Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G6
AMD EPYC 9654

SPECspeed®2017_int_base = 14.5

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Dec-2024

Software Availability: Dec-2024

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G6
AMD EPYC 9654

SPECspeed®2017_int_base = 14.5

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Dec-2024

Software Availability: Dec-2024

Peak Optimization Flags (Continued)

```
602.gcc_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

```
605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

625.x264_s: Same as 602.gcc_s

657.xz_s: Same as 602.gcc_s

C++ benchmarks:

620.omnetpp_s: basepeak = yes

```
623.xalancbmk_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlibm -lamdalloc-ext -lflang
```

631.deepsjeng_s: basepeak = yes

```
641.leela_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R3950 G6
AMD EPYC 9654

SPECspeed®2017_int_base = 14.5

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Mar-2025

Hardware Availability: Dec-2024

Software Availability: Dec-2024

Peak Optimization Flags (Continued)

641.leela_s (continued):

```
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

```
648.exchange2_s: basepeak = yes
```

Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-AMD-Settings-V1.7-Turin.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-AMD-Settings-V1.7-Turin.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-21 05:47:08-0400.

Report generated on 2025-04-09 14:56:35 by CPU2017 PDF formatter v6716.

Originally published on 2025-04-09.