



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9965)

SPECSspeed®2017_fp_base = 418

SPECSspeed®2017_fp_peak = 419

CPU2017 License: 6488


Test Date: Mar-2025

Test Sponsor: xFusion

Hardware Availability: Oct-2024

Tested by: xFusion

Software Availability: Oct-2024

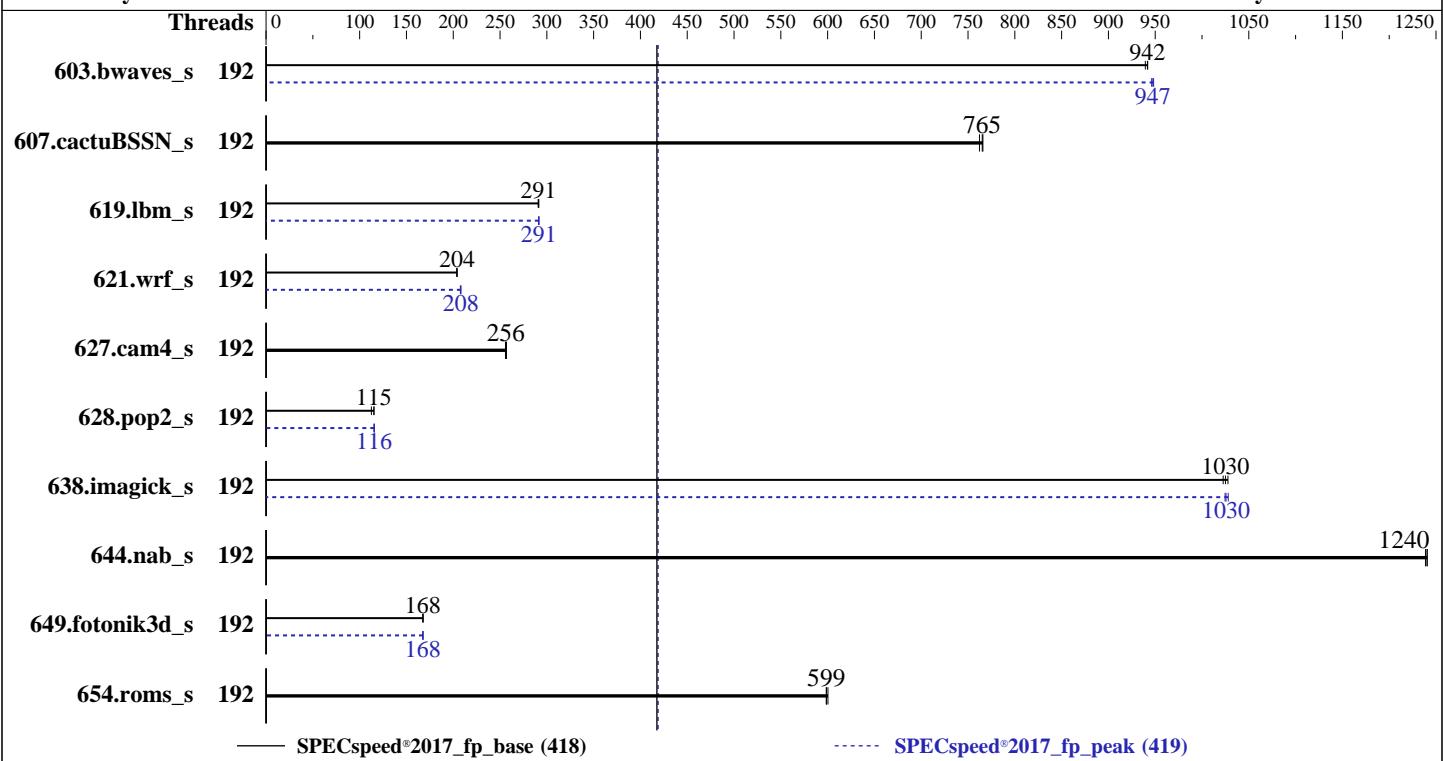

Hardware		Software	
CPU Name:	AMD EPYC 9965	OS:	Red Hat Enterprise Linux release 9.4 (Plow)
Max MHz:	3700		kernel version
Nominal:	2250		5.14.0-427.13.1.el9_4.x86_64
Enabled:	192 cores, 1 chip, 2 threads/core	Compiler:	C/C++/Fortran: Version 5.0.0 of AOCC
Orderable:	1 chip	Parallel:	Yes
Cache L1:	32 KB I + 48 KB D on chip per core	Firmware:	Version 00.13.01.07 released Feb-2025
L2:	1 MB I+D on chip per core	File System:	xfs
L3:	384 MB I+D on chip per chip, 32 MB shared / 16 cores	System State:	Run level 3 (multi-user)
Other:	None	Base Pointers:	64-bit
Memory:	768 GB (12 x 64 GB 2Rx4 PC5-6400B-R)	Peak Pointers:	64-bit
Storage:	1 x 1.6 TB PCIe NVMe SSD	Other:	None
Other:	CPU Cooling: Air	Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9965)

SPECSpeed®2017_fp_base = 418

SPECSpeed®2017_fp_peak = 419

CPU2017 License: 6488

Test Date: Mar-2025

Test Sponsor: xFusion

Hardware Availability: Oct-2024

Tested by: xFusion

Software Availability: Oct-2024

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	192	62.8	939	62.6	942	62.7	942	192	62.3	947	62.2	948	62.4	946		
607.cactuBSSN_s	192	21.8	766	21.9	762	21.8	765	192	21.8	766	21.9	762	21.8	765		
619.lbm_s	192	18.0	291	18.0	291	18.0	291	192	18.0	292	18.0	291	18.0	291		
621.wrf_s	192	64.8	204	64.9	204	64.8	204	192	63.6	208	63.7	208	63.5	208		
627.cam4_s	192	34.6	256	34.5	257	34.6	256	192	34.6	256	34.5	257	34.6	256		
628.pop2_s	192	106	113	103	115	103	115	192	103	116	103	116	103	115		
638.imagick_s	192	14.0	1030	14.1	1020	14.1	1030	192	14.0	1030	14.1	1020	14.1	1030		
644.nab_s	192	14.1	1240	14.1	1240	14.1	1240	192	14.1	1240	14.1	1240	14.1	1240		
649.fotonik3d_s	192	54.4	168	54.4	168	54.4	168	192	54.4	167	54.3	168	54.4	168		
654.roms_s	192	26.3	599	26.3	599	26.2	600	192	26.3	599	26.3	599	26.2	600		

SPECSpeed®2017_fp_base = 418

SPECSpeed®2017_fp_peak = 419

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit

'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.

To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.

To free node-local memory and avoid remote memory usage,

'sysctl -w vm.zone_reclaim_mode=1' run as root.

To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.

To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9965)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECspeed®2017_fp_base = 418

SPECspeed®2017_fp_peak = 419

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-383"  
LD_LIBRARY_PATH =  
    "/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib32:  
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"  
MALLOC_CONF = "retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "384"
```

Environment variables set by runcpu during the 603.bwaves_s peak run:

```
GOMP_CPU_AFFINITY = "0-191"
```

Environment variables set by runcpu during the 619.lbm_s peak run:

```
GOMP_CPU_AFFINITY = "0-191"
```

Environment variables set by runcpu during the 621.wrf_s peak run:

```
GOMP_CPU_AFFINITY = "0-191"
```

Environment variables set by runcpu during the 628.pop2_s peak run:

```
GOMP_CPU_AFFINITY = "0-191"
```

Environment variables set by runcpu during the 638.imagick_s peak run:

```
GOMP_CPU_AFFINITY = "0-191"
```

Environment variables set by runcpu during the 649.fotonik3d_s peak run:

```
GOMP_CPU_AFFINITY = "0-191"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:

```
Determinism Control = Manual  
Determinism Enable = Power  
TDP Control = Manual  
TDP = 500  
PPT Control = Manual  
PPT = 500  
NUMA Nodes Per Socket = Auto  
ACPI SRAT L3 Cache As NUMA Domain = Enable
```

```
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Mon Mar 17 14:38:17 2025
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9965)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECspeed®2017_fp_base = 418

SPECspeed®2017_fp_peak = 419

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-32.el9_4)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-427.13.1.el9_4.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 10 10:29:16 EDT
2024 x86_64 x86_64 x86_64 GNU/Linux

2. w
14:38:17 up 2 min, 1 user, load average: 2.54, 4.11, 1.89
USER TTY LOGIN@ IDLE PCPU WHAT
root ttym1 14:37 33.00s 0.85s 0.00s -bash

3. Username
From environment variable \$USER: root

4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 3091299
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9965)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECspeed®2017_fp_base = 418

SPECspeed®2017_fp_peak = 419

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

```
cpu time          (seconds, -t) unlimited
max user processes      (-u) 3091299
virtual memory        (kbytes, -v) unlimited
file locks           (-x) unlimited
```

```
-----  
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
login -- root
-bash
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.009/templogs/preenv.fpspeed.009.0.log --lognum 009.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
-----  
6. /proc/cpuinfo
model name      : AMD EPYC 9965 192-Core Processor
vendor_id       : AuthenticAMD
cpu family     : 26
model          : 17
stepping        : 0
microcode      : 0xb101028
bugs            : sysret_ss_atrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores      : 192
siblings        : 384
1 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-191
physical id 0: apicids 0-383
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

```
-----  
7. lscpu
```

```
From lscpu from util-linux 2.37.4:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                384
On-line CPU(s) list:  0-383
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9965 192-Core Processor
BIOS Model name:      AMD EPYC 9965 192-Core Processor
CPU family:            26
Model:                 17
Thread(s) per core:   2
Core(s) per socket:   192
Socket(s):             1
Stepping:              0
Frequency boost:      enabled
CPU(s) scaling MHz:  61%
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9965)

SPECspeed®2017_fp_base = 418

SPECspeed®2017_fp_peak = 419

CPU2017 License: 6488

Test Date: Mar-2025

Test Sponsor: xFusion

Hardware Availability: Oct-2024

Tested by: xFusion

Software Availability: Oct-2024

Platform Notes (Continued)

```

CPU max MHz: 3700.1951
CPU min MHz: 1500.0000
BogoMIPS: 4493.40
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mttr pge mca cmov pat pse36
       clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
       lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid
       aperfmpfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2
       x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm
       extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit
       wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
       cat_13 cdp_13 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp
       ibrs_enhanced vmmcall fsgsbase tsc_adjust bmil avx2 smep bmi2 erms
       invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma
       clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
       xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local
       avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin
       cppo arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid
       decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic
       v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes
       vpclmulqdq avx512_vnni avx512_bitalg avx512_vpocntdq la57 rdpid
       bus_lock_detect movmdir movdir64b overflow_recov succor smca fsrm
       avx512_vp2intersect flush_lld debug_swap

Virtualization: AMD-V
L1d cache: 9 MiB (192 instances)
L1i cache: 6 MiB (192 instances)
L2 cache: 192 MiB (192 instances)
L3 cache: 384 MiB (12 instances)
NUMA node(s): 12
NUMA node0 CPU(s): 0-15,192-207
NUMA node1 CPU(s): 16-31,208-223
NUMA node2 CPU(s): 32-47,224-239
NUMA node3 CPU(s): 48-63,240-255
NUMA node4 CPU(s): 64-79,256-271
NUMA node5 CPU(s): 80-95,272-287
NUMA node6 CPU(s): 96-111,288-303
NUMA node7 CPU(s): 112-127,304-319
NUMA node8 CPU(s): 128-143,320-335
NUMA node9 CPU(s): 144-159,336-351
NUMA node10 CPU(s): 160-175,352-367
NUMA node11 CPU(s): 176-191,368-383
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS, IBPB conditional, STIBP
always-on, RSB filling, PBRSB-eIBRS Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	9M	12	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	1M	192M	16	Unified	2	1024	1	64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9965)

SPECSpeed®2017_fp_base = 418

SPECSpeed®2017_fp_peak = 419

CPU2017 License: 6488

Test Date: Mar-2025

Test Sponsor: xFusion

Hardware Availability: Oct-2024

Tested by: xFusion

Software Availability: Oct-2024

Platform Notes (Continued)

L3 32M 384M 16 Unified 3 32768 1 64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 12 nodes (0-11)
node 0 cpus: 0-15,192-207
node 0 size: 63459 MB
node 0 free: 62998 MB
node 1 cpus: 16-31,208-223
node 1 size: 64503 MB
node 1 free: 64117 MB
node 2 cpus: 32-47,224-239
node 2 size: 64503 MB
node 2 free: 64227 MB
node 3 cpus: 48-63,240-255
node 3 size: 64503 MB
node 3 free: 64013 MB
node 4 cpus: 64-79,256-271
node 4 size: 64503 MB
node 4 free: 64237 MB
node 5 cpus: 80-95,272-287
node 5 size: 64462 MB
node 5 free: 64204 MB
node 6 cpus: 96-111,288-303
node 6 size: 64503 MB
node 6 free: 64223 MB
node 7 cpus: 112-127,304-319
node 7 size: 64503 MB
node 7 free: 64258 MB
node 8 cpus: 128-143,320-335
node 8 size: 64410 MB
node 8 free: 64119 MB
node 9 cpus: 144-159,336-351
node 9 size: 64503 MB
node 9 free: 64191 MB
node 10 cpus: 160-175,352-367
node 10 size: 64503 MB
node 10 free: 64009 MB
node 11 cpus: 176-191,368-383
node 11 size: 64503 MB
node 11 free: 64255 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9   10  11
  0: 10  11  11  11  11  11  11  11  11  11  11  11
  1: 11  10  11  11  11  11  11  11  11  11  11  11
  2: 11  11  10  11  11  11  11  11  11  11  11  11
  3: 11  11  11  10  11  11  11  11  11  11  11  11
  4: 11  11  11  11  10  11  11  11  11  11  11  11
  5: 11  11  11  11  11  10  11  11  11  11  11  11
  6: 11  11  11  11  11  11  10  11  11  11  11  11
  7: 11  11  11  11  11  11  11  10  11  11  11  11
  8: 11  11  11  11  11  11  11  11  10  11  11  11
  9: 11  11  11  11  11  11  11  11  11  10  11  11
 10: 11  11  11  11  11  11  11  11  11  11  10  11
 11: 11  11  11  11  11  11  11  11  11  11  11  10
```

9. /proc/meminfo

MemTotal: 791415776 kB

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9965)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECSpeed®2017_fp_base = 418

SPECSpeed®2017_fp_peak = 419

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

10. who -r
run-level 3 Mar 17 14:35

11. Systemd service manager version: systemd 252 (252-32.el9_4)
Default Target Status
multi-user running

12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online audited crond
dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor
lvm2-monitor mdmonitor microcode nis-domainname nvmefc-boot-connections rhsmcertd rsyslog
rtkit-daemon selinux-autorelabel-mark sshd sssd systemd-boot-update
systemd-network-generator tuned udisks2 upower
enabled-runtime systemd-remount-fs
disabled blk-availability canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait chronyd-restricted console-getty
cpupower debug-shell dnf-system-upgrade hwloc-dump-hwdata ipsec kvm_stat
man-db-restart-cache-update nftables nvme-fc-autoconnect pesign rdisc rhcd rhsm rhsm-facts
rpmdb-rebuild selinux-check-proper-disable serial-getty@ sshd keygen@
systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
systemd-sysupdate-reboot

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd1,gpt2)/vmlinuz-5.14.0-427.13.1.el9_4.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
nohz_full=1-383

14. cpupower frequency-info
analyzing CPU 213:
current policy: frequency should be within 1.50 GHz and 2.25 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes
Boost States: 0
Total States: 3
Pstate-P0: 38800MHz

15. tuned-adm active
Current active profile: throughput-performance

16. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 0

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9965)

SPECSpeed®2017_fp_base = 418

SPECSpeed®2017_fp_peak = 419

CPU2017 License: 6488

Test Date: Mar-2025

Test Sponsor: xFusion

Hardware Availability: Oct-2024

Tested by: xFusion

Software Availability: Oct-2024

Platform Notes (Continued)

```
vm.compaction_proactiveness          20
vm.dirty_background_bytes            0
vm.dirty_background_ratio           10
vm.dirty_bytes                      0
vm.dirty_expire_centisecs          3000
vm.dirty_ratio                      8
vm.dirty_writeback_centisecs       500
vm.dirtytime_expire_seconds        43200
vm.extfrag_threshold                500
vm.min_unmapped_ratio               1
vm.nr_hugepages                     0
vm.nr_hugepages_mempolicy          0
vm.nr_overcommit_hugepages         0
vm.swappiness                        1
vm.watermark_boost_factor          15000
vm.watermark_scale_factor           10
vm.zone_reclaim_mode                1

-----
17. /sys/kernel/mm/transparent_hugepage
    defrag      [always] defer defer+madvise madvise never
    enabled     [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled always within_size advise [never] deny force

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs   60000
    defrag                  1
    max_ptes_none           511
    max_ptes_shared          256
    max_ptes_swap             64
    pages_to_scan            4096
    scan_sleep_millisecs    10000

-----
19. OS release
    From /etc/*-release /etc/*-version
    os-release      Red Hat Enterprise Linux 9.4 (Plow)
    redhat-release  Red Hat Enterprise Linux release 9.4 (Plow)
    system-release  Red Hat Enterprise Linux release 9.4 (Plow)

-----
20. Disk information
    SPEC is set to: /home/cpu2017
    Filesystem      Type  Size  Used Avail Use% Mounted on
    /dev/mapper/rhel-home xfs   1.0T   12G 1012G   2% /home

-----
21. /sys/devices/virtual/dmi/id
    Product:        2158H V8
    Product Family: Turin

-----
22. dmidecode
    Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9965)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECSpeed®2017_fp_base = 418

SPECSpeed®2017_fp_peak = 419

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

12x SK Hynix HMCG94AHBRA485N 64 GB 2 rank 6400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 00.13.01.07
BIOS Date: 02/28/2025
BIOS Revision: 1.7

Compiler Version Notes

=====

C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

C++, C, Fortran | 607.cactusBSSN_s(base, peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9965)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECspeed®2017_fp_base = 418

SPECspeed®2017_fp_peak = 419

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Compiler Version Notes (Continued)

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapi -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapi -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIB -ffast-math -fopenmp -DSPEC_OPENMP -fsto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9965)

SPECSpeed®2017_fp_base = 418

SPECSpeed®2017_fp_peak = 419

CPU2017 License: 6488

Test Date: Mar-2025

Test Sponsor: xFusion

Hardware Availability: Oct-2024

Tested by: xFusion

Software Availability: Oct-2024

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt
-mllvm -loop-unswitch-threshold=200000 -mllvm -unroll-threshold=100
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9965)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECSpeed®2017_fp_base = 418

SPECSpeed®2017_fp_peak = 419

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

638.imagick_s: Same as 619.lbm_s

644.nab_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math
-fopenmp -fscalar-transform -fvector-transform
-mllvm -reduce-array-computations=3 -Mrecursive
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9965)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECspeed®2017_fp_base = 418

SPECspeed®2017_fp_peak = 419

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

```
649.fotonik3d_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math
-fopenmp -flto -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm
-lamdaloc -lflang
```

```
654.roms_s: basepeak = yes
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -fopenmp=libomp
-lomp -lamdlibm -lamdaloc -lflang
```

```
627.cam4_s: basepeak = yes
```

```
628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fscalar-transform
-fvector-transform -Mrecursive -fopenmp=libomp -lomp
-lamdalibm -lamdaloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
607.cactuBSSN_s: basepeak = yes
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9965)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECSpeed®2017_fp_base = 418

SPECSpeed®2017_fp_peak = 419

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-AMD-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-AMD-V1.2.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-17 02:38:17-0400.

Report generated on 2025-04-09 14:58:12 by CPU2017 PDF formatter v6716.

Originally published on 2025-04-09.