



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(2.20 GHz, AMD EPYC 9825)

SPECrate®2017\_int\_base = 1240

SPECrate®2017\_int\_peak = 1270

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

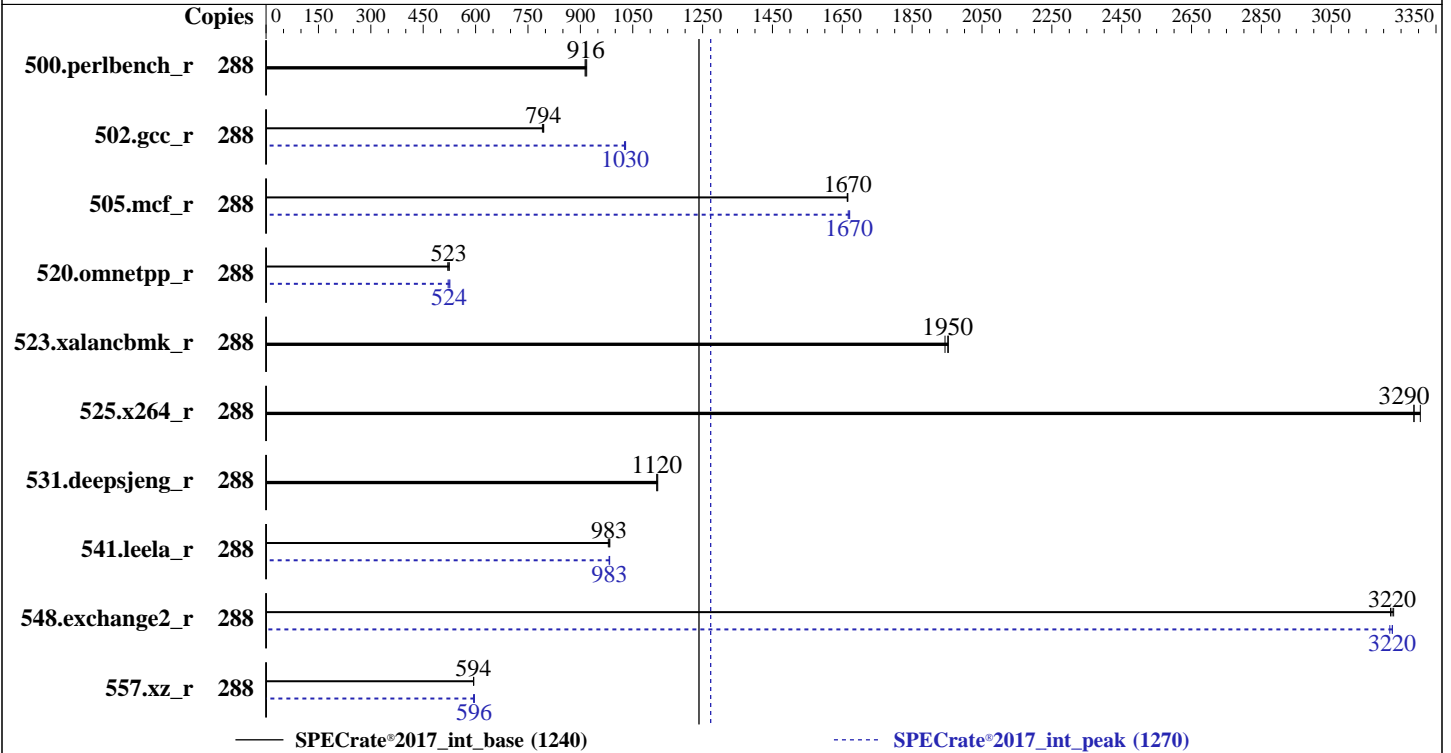

### Hardware

CPU Name: AMD EPYC 9825  
 Max MHz: 3700  
 Nominal: 2200  
 Enabled: 144 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 384 MB I+D on chip per chip,  
 32 MB shared / 12 cores  
 Other: None  
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R, running at 6000)  
 Storage: 1 x 480 GB SATA SSD  
 Other: CPU Cooling: Air

### Software

OS: Red Hat Enterprise Linux 9.4 (Plow)  
 Kernel 5.14.0-427.13.1.el9\_4.x86\_64  
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC  
 Parallel: No  
 Firmware: Lenovo BIOS Version KAE131I 5.30 released Dec-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: None  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(2.20 GHz, AMD EPYC 9825)

SPECrate®2017\_int\_base = 1240

SPECrate®2017\_int\_peak = 1270

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2025  
**Hardware Availability:** Feb-2025  
**Software Availability:** Oct-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	288	499	918	502	914	<b>501</b>	<b>916</b>	288	499	918	502	914	<b>501</b>	<b>916</b>
502.gcc_r	288	<b>514</b>	<b>794</b>	513	795	515	791	288	396	1030	397	1030	<b>396</b>	<b>1030</b>
505.mcf_r	288	280	1660	279	1670	<b>279</b>	<b>1670</b>	288	279	1670	<b>279</b>	<b>1670</b>	278	1670
520.omnetpp_r	288	726	520	720	525	<b>722</b>	<b>523</b>	288	<b>721</b>	<b>524</b>	725	521	718	526
523.xalancbmk_r	288	<b>156</b>	<b>1950</b>	156	1940	156	1950	288	<b>156</b>	<b>1950</b>	156	1940	156	1950
525.x264_r	288	<b>153</b>	<b>3290</b>	153	3290	153	3310	288	<b>153</b>	<b>3290</b>	153	3290	153	3310
531.deepsjeng_r	288	295	1120	294	1120	<b>295</b>	<b>1120</b>	288	295	1120	294	1120	<b>295</b>	<b>1120</b>
541.leela_r	288	<b>485</b>	<b>983</b>	484	984	487	980	288	485	983	485	984	<b>485</b>	<b>983</b>
548.exchange2_r	288	234	3220	<b>234</b>	<b>3220</b>	234	3230	288	234	3230	<b>234</b>	<b>3220</b>	234	3220
557.xz_r	288	523	595	523	594	<b>523</b>	<b>594</b>	288	<b>522</b>	<b>596</b>	524	594	521	596

SPECrate®2017\_int\_base = **1240**

SPECrate®2017\_int\_peak = **1270**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations:  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(2.20 GHz, AMD EPYC 9825)

SPECrate®2017\_int\_base = 1240

SPECrate®2017\_int\_peak = 1270

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2025

**Hardware Availability:** Feb-2025

**Software Availability:** Oct-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017-1.1.9-amd
-aocc500_znver5_A1.2/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
NUMA Nodes per Socket set to NPS4

```
Sysinfo program /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Wed Mar 19 10:05:19 2025
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 252 (252-32.el9\_4)
  12. Failed units, from systemctl list-units --state=failed
  13. Services, from systemctl list-unit-files
  14. Linux kernel boot-time arguments, from /proc/cmdline
  15. cpupower frequency-info
  16. sysctl
  17. /sys/kernel/mm/transparent\_hugepage
  18. /sys/kernel/mm/transparent\_hugepage/khugepaged
  19. OS release
  20. Disk information
  21. /sys/devices/virtual/dmi/id
  22. dmidecode
  23. BIOS
- 

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(2.20 GHz, AMD EPYC 9825)

SPECrate®2017\_int\_base = 1240

SPECrate®2017\_int\_peak = 1270

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2025  
**Hardware Availability:** Feb-2025  
**Software Availability:** Oct-2024

### Platform Notes (Continued)

-----  
1. `uname -a`  
Linux localhost.localdomain 5.14.0-427.13.1.el9\_4.x86\_64 #1 SMP PREEMPT\_DYNAMIC Wed Apr 10 10:29:16 EDT 2024 x86\_64 x86\_64 x86\_64 GNU/Linux

-----  
2. `w`  
10:05:19 up 3 min, 0 users, load average: 0.09, 0.14, 0.07  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT

-----  
3. Username  
From environment variable \$USER: root

-----  
4. `ulimit -a`  
real-time non-blocking time (microseconds, -R) unlimited  
core file size (blocks, -c) 0  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 3093650  
max locked memory (kbytes, -l) 2097152  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 3093650  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

-----  
5. `sysinfo process ancestry`  
/usr/lib/systemd/systemd --switched-root --system --deserialize 31  
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups  
sshd: root [priv]  
sshd: root@notty  
/bin/bash ./02.remote\_local\_SPECcpu\_1.01.sh  
/bin/bash ./Run025-compliant-amd-rateint.sh  
python3 ./run\_amd\_rate\_aocc500\_znver5\_A1.py  
/bin/bash ./amd\_rate\_aocc500\_znver5\_A1.sh  
runcpu --config amd\_rate\_aocc500\_znver5\_A1.cfg --tune all --reportable --iterations 3 intrate  
runcpu --configfile amd\_rate\_aocc500\_znver5\_A1.cfg --tune all --reportable --iterations 3 --nopower  
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile  
\$SPEC/tmp/CPU2017.429/templogs/preenv.intrate.429.0.log --lognum 429.0 --from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /home/cpu2017-1.1.9-amd-aocc500\_znver5\_A1.2

-----  
6. `/proc/cpuinfo`  
model name : AMD EPYC 9825 144-Core Processor  
vendor\_id : AuthenticAMD  
cpu family : 26  
model : 17  
stepping : 0  
microcode : 0xb101025

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(2.20 GHz, AMD EPYC 9825)

SPECrate®2017\_int\_base = 1240

SPECrate®2017\_int\_peak = 1270

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2025  
**Hardware Availability:** Feb-2025  
**Software Availability:** Oct-2024

### Platform Notes (Continued)

bugs : sysret\_ss\_attrs spectre\_v1 spectre\_v2 spec\_store\_bypass  
TLB size : 192 4K pages  
cpu cores : 144  
siblings : 288  
1 physical ids (chips)  
288 processors (hardware threads)  
physical id 0: core ids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123,128-139,144-155,160-171,176-187  
physical id 0: apicids  
0-23,32-55,64-87,96-119,128-151,160-183,192-215,224-247,256-279,288-311,320-343,352-375  
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 288
On-line CPU(s) list: 0-287
Vendor ID: AuthenticAMD
BIOS Vendor ID: Advanced Micro Devices, Inc.
Model name: AMD EPYC 9825 144-Core Processor
BIOS Model name: AMD EPYC 9825 144-Core Processor
CPU family: 26
Model: 17
Thread(s) per core: 2
Core(s) per socket: 144
Socket(s): 1
Stepping: 0
BogoMIPS: 4393.66
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid
aperfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2
x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm
extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit
wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp
ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin
cpc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid
decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic
v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
bus_lock_detect movdiri movdir64b overflow_recov succor smca fsrm
avx512_vp2intersect flush_llid debug_swap

Virtualization: AMD-V
L1d cache: 6.8 MiB (144 instances)
L1i cache: 4.5 MiB (144 instances)
L2 cache: 144 MiB (144 instances)
L3 cache: 384 MiB (12 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-35,144-179
NUMA node1 CPU(s): 36-71,180-215
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(2.20 GHz, AMD EPYC 9825)

SPECrate®2017\_int\_base = 1240

SPECrate®2017\_int\_peak = 1270

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2025  
**Hardware Availability:** Feb-2025  
**Software Availability:** Oct-2024

### Platform Notes (Continued)

```

NUMA node2 CPU(s):          72-107,216-251
NUMA node3 CPU(s):          108-143,252-287
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:         Not affected
Vulnerability Mds:          Not affected
Vulnerability Meltdown:     Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed:     Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:    Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:    Mitigation; Enhanced / Automatic IBRS, IBPB conditional, STIBP
                                always-on, RSB filling, PBRSE-eIBRS Not affected
Vulnerability Srbds:        Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6.8M	12	Data	1	64	1	64
L1i	32K	4.5M	8	Instruction	1	64	1	64
L2	1M	144M	16	Unified	2	1024	1	64
L3	32M	384M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-35,144-179
node 0 size: 193032 MB
node 0 free: 191906 MB
node 1 cpus: 36-71,180-215
node 1 size: 193517 MB
node 1 free: 192369 MB
node 2 cpus: 72-107,216-251
node 2 size: 193517 MB
node 2 free: 192433 MB
node 3 cpus: 108-143,252-287
node 3 size: 193383 MB
node 3 free: 191981 MB
node distances:
node  0  1  2  3
0:  10  12  12  12
1:  12  10  12  12
2:  12  12  10  12
3:  12  12  12  10

```

9. /proc/meminfo

MemTotal: 792014616 kB

10. who -r

run-level 3 Mar 19 10:02

11. Systemd service manager version: systemd 252 (252-32.e19\_4)

```

Default Target Status
multi-user     degraded

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(2.20 GHz, AMD EPYC 9825)

SPECrate®2017\_int\_base = 1240

SPECrate®2017\_int\_peak = 1270

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2025

**Hardware Availability:** Feb-2025

**Software Availability:** Oct-2024

### Platform Notes (Continued)

12. Failed units, from `systemctl list-units --state=failed`

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* NetworkManager-wait-online.service	loaded	failed	failed	Network Manager Wait Online

13. Services, from `systemctl list-unit-files`

STATE	UNIT	FILES
enabled	NetworkManager	NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor mdmonitor microcode nis-domainname rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark sshd sssd systemd-boot-update systemd-network-generator udisks2 upower
enabled-runtime	systemd-remount-fs	
disabled	canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait chronyd-restricted console-getty cpupower debug-shell dnf-system-upgrade hwloc-dump-hwdata kvm_stat man-db-restart-cache-update nftables pesign rdisc rhcd rhsm rhsm-facts rpmdb-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext	
indirect	sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate systemd-sysupdate-reboot	

14. Linux kernel boot-time arguments, from `/proc/cmdline`

```
BOOT_IMAGE=(hd3,gpt3)/boot/vmlinuz-5.14.0-427.13.1.el9_4.x86_64
root=UUID=273c79f3-13a9-4ae6-9c36-e82799318ef8
ro
resume=UUID=19c8733f-555f-4142-8f61-7554d0dc64ae
```

15. cpupower frequency-info

```
analyzing CPU 282:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
Boost States: 0
Total States: 3
Pstate-P0: 36800MHz
```

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(2.20 GHz, AMD EPYC 9825)

SPECrate®2017\_int\_base = 1240

SPECrate®2017\_int\_peak = 1270

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2025

**Hardware Availability:** Feb-2025

**Software Availability:** Oct-2024

### Platform Notes (Continued)

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000
-----
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release           Red Hat Enterprise Linux 9.4 (Plow)
redhat-release       Red Hat Enterprise Linux release 9.4 (Plow)
system-release       Red Hat Enterprise Linux release 9.4 (Plow)
-----
```

```
-----
20. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2
Filesystem  Type  Size  Used Avail Use% Mounted on
/dev/sda4   xfs   372G 107G 265G 29% /home
-----
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor:      Lenovo
Product:     ThinkSystem SR635V3
Product Family: ThinkSystem
Serial:      1234567890
-----
```

```
-----
22. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
 5x Samsung M321R8GA0PB2-CCPKC 64 GB 2 rank 6400, configured at 6000
 5x Samsung M321R8GA0PB2-CCPPC 64 GB 2 rank 6400, configured at 6000
 2x Samsung M321R8GA0PB2-CCPWC 64 GB 2 rank 6400, configured at 6000
-----
```

```
-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Lenovo
BIOS Version:     KAE131I-5.30
BIOS Date:        12/17/2024
BIOS Revision:    5.30
Firmware Revision: 54.6
-----
```





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(2.20 GHz, AMD EPYC 9825)

SPECrate®2017\_int\_base = 1240

SPECrate®2017\_int\_peak = 1270

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2025  
**Hardware Availability:** Feb-2025  
**Software Availability:** Oct-2024

### Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

=====  
C | 502.gcc\_r(peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====

=====  
Fortran | 548.exchange2\_r(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017\_int\_base = 1240

ThinkSystem SR635 V3  
(2.20 GHz, AMD EPYC 9825)

SPECrate®2017\_int\_peak = 1270

CPU2017 License: 9017

Test Date: Mar-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate®2017\_int\_base = 1240

ThinkSystem SR635 V3  
(2.20 GHz, AMD EPYC 9825)

SPECrate®2017\_int\_peak = 1270

**CPU2017 License:** 9017

**Test Date:** Mar-2025

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Feb-2025

**Tested by:** Lenovo Global Technology

**Software Availability:** Oct-2024

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(2.20 GHz, AMD EPYC 9825)

SPECrate®2017\_int\_base = 1240

SPECrate®2017\_int\_peak = 1270

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2025

**Hardware Availability:** Feb-2025

**Software Availability:** Oct-2024

## Peak Portability Flags

```

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: basepeak = yes

```

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc

```

```

505.mcf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl

```

525.x264\_r: basepeak = yes

```

557.xz_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017\_int\_base = 1240

ThinkSystem SR635 V3  
(2.20 GHz, AMD EPYC 9825)

SPECrate®2017\_int\_peak = 1270

CPU2017 License: 9017

Test Date: Mar-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

557.xz\_r (continued):

```
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lflang -lamdalloc-ext -ldl
```

C++ benchmarks:

520.omnetpp\_r: -m64 -std=c++14

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt -fno-PIE  
-no-pie -fvirtual-function-elimination -fvisibility=hidden  
-mllvm -do-block-reorder=advanced -lamdlibm -lamdalloc-ext  
-ldl
```

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: -m64 -std=c++14

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt -fno-PIE  
-no-pie -fvirtual-function-elimination -fvisibility=hidden  
-mllvm -do-block-reorder=advanced -lamdlibm -lflang  
-lamdalloc-ext -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver5 -fveclib=AMDLIBM  
-ffast-math -flto -fepilog-vectorization-of-inductions  
-mllvm -optimize-strided-mem-cost -floop-transform  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm  
-lflang -lamdalloc -ldl
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(2.20 GHz, AMD EPYC 9825)

SPECrate®2017\_int\_base = 1240

SPECrate®2017\_int\_peak = 1270

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

## Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc\_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc5/1316/amd\_rate\_aocc500\_znver5\_A\_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-E.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-E.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-18 22:05:18-0400.

Report generated on 2025-04-09 14:59:18 by CPU2017 PDF formatter v6716.

Originally published on 2025-04-09.