



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 219

PowerEdge XR8610t (Intel Xeon Gold 6433N)

SPECrate®2017_int_peak = 227

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Apr-2024

Software Availability: Jun-2024

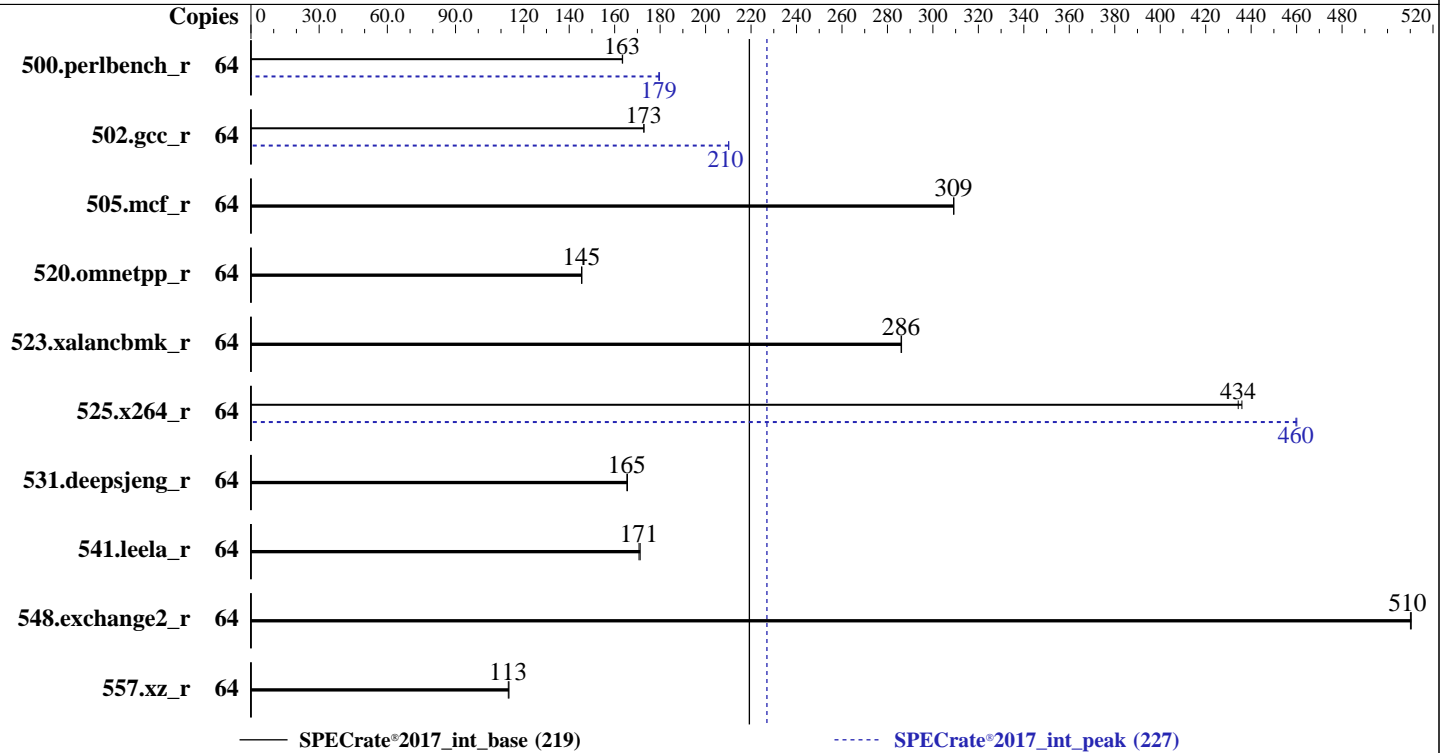

Hardware

CPU Name: Intel Xeon Gold 6433N
 Max MHz: 3600
 Nominal: 2000
 Enabled: 32 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (8 x 64 GB 2Rx4 PC5-4800B-R, running at 4400)
 Storage: 60 GB on tmpfs
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
 6.4.0-150600.21-default
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 1.9.3 released Mar-2024
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 219

PowerEdge XR8610t (Intel Xeon Gold 6433N)

SPECrate®2017_int_peak = 227

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2025
Hardware Availability: Apr-2024
Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	624	163	623	164			64	567	180	568	179		
502.gcc_r	64	524	173	524	173			64	431	210	431	210		
505.mcf_r	64	335	309	334	309			64	335	309	334	309		
520.omnetpp_r	64	577	145	577	146			64	577	145	577	146		
523.xalancbmk_r	64	236	286	236	286			64	236	286	236	286		
525.x264_r	64	257	436	258	434			64	244	460	244	460		
531.deepsjeng_r	64	443	166	444	165			64	443	166	444	165		
541.leela_r	64	621	171	619	171			64	621	171	619	171		
548.exchange2_r	64	329	510	328	510			64	329	510	328	510		
557.xz_r	64	609	114	611	113			64	609	114	611	113		

SPECrate®2017_int_base = 219

SPECrate®2017_int_peak = 227

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/lib/ia32:/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 219

PowerEdge XR8610t (Intel Xeon Gold 6433N)

SPECrate®2017_int_peak = 227

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Apr-2024

Software Availability: Jun-2024

General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 60 GB ramdisk created with the cmd: "mount -t tmpfs -o size=60G tmpfs /mnt/ramdisk"

Platform Notes

BIOS Settings:

Virtualization Technology : Disabled
 Sub NUMA Cluster : 2-Way Clustering
 UMA Based Clustering Status : Disable
 x2APIC Mode : Disabled

System Profile : Custom
 CPU Power Management : Maximum Performance
 Energy Efficient Turbo : Disabled
 C1E : Disabled
 C-States : Autonomous
 Memory Patrol Scrub : Disabled
 Energy Efficient Policy : Performance
 ADDDC Setting : Disabled
 DIMM Self Healing -
 on Uncorrectable Memory Error : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2024.1/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on SLX8620-XR8610t Sat Mar 29 21:06:34 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. sysctl
15. /sys/kernel/mm/transparent_hugepage
16. /sys/kernel/mm/transparent_hugepage/khugepaged
17. OS release
18. Disk information
19. /sys/devices/virtual/dmi/id
20. dmidecode
21. BIOS

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 219

PowerEdge XR8610t (Intel Xeon Gold 6433N)

SPECrate®2017_int_peak = 227

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2025
Hardware Availability: Apr-2024
Software Availability: Jun-2024

Platform Notes (Continued)

```

-----
1. uname -a
Linux SLX8620-XR8610t 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

-----
2. w
 21:06:34 up 1 min,  1 user,  load average: 0.40, 0.21, 0.08
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root     tty1      -             21:05   34.00s 0.91s  0.00s /bin/bash
/home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.1a --output_format html,pdf,txt

-----
3. Username
From environment variable $USER:  root

-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size               (blocks, -f) unlimited
pending signals        (-i) 2060014
max locked memory      (kbytes, -l) 8192
max memory size        (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes     (-u) 2060014
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=31
login -- root
-bash
/bin/bash /home/DellFiles/bin/DELL_rate.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.1a --output_format
html,pdf,txt
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.1a --output_format
html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 -c
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=32 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2 --define
DL-VERS=6.1a --output_format html,pdf,txt intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 --configfile
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=32 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --iterations 2
--define DL-VERS=6.1a --output_format html,pdf,txt --nopower --runmode rate --tune base:peak --size
refrate intrate --nopreenv --logfile $SPEC/tmp/CPU2017.001/tempslogs/preenv.intrate.001.0.log
--lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 219

PowerEdge XR8610t (Intel Xeon Gold 6433N)

SPECrate®2017_int_peak = 227

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2025
Hardware Availability: Apr-2024
Software Availability: Jun-2024

Platform Notes (Continued)

\$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2024.1

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Gold 6433N
vendor_id       : GenuineIntel
cpu family      : 6
model           : 143
stepping        : 8
microcode       : 0x2b0005c0
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
cpu cores       : 32
siblings        : 64
1 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-31
physical id 0: apicids 0-63
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:   0-63
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel
Model name:            Intel(R) Xeon(R) Gold 6433N
BIOS Model name:       Intel(R) Xeon(R) Gold 6433N CPU @ 2.0GHz
BIOS CPU family:       179
CPU family:            6
Model:                 143
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):             1
Stepping:              8
CPU(s) scaling MHz:    31%
CPU max MHz:           3600.0000
CPU min MHz:           800.0000
BogoMIPS:              4000.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpelgb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr
pdc_m pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer
aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
cat_l3 cat_l2 cdp_l3 cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm
rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts hfi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni
vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 219

PowerEdge XR8610t (Intel Xeon Gold 6433N)

SPECrate®2017_int_peak = 227

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2025
Hardware Availability: Apr-2024
Software Availability: Jun-2024

Platform Notes (Continued)

```

rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
serialize tsxldtrk pconfig arch_lbr ibt avx512_fp16 flush_lld
arch_capabilities
Lld cache: 1.5 MiB (32 instances)
Lli cache: 1 MiB (32 instances)
L2 cache: 64 MiB (32 instances)
L3 cache: 60 MiB (1 instance)
NUMA node(s): 2
NUMA node0 CPU(s): 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,31,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,63
NUMA node1 CPU(s): 1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,30,33,35,37,39,41,43,45,47,49,51,53,55,57,59,61,62
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS SW sequence; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
Lld	48K	1.5M	12	Data	1	64	1	64
Lli	32K	1M	8	Instruction	1	64	1	64
L2	2M	64M	16	Unified	2	2048	1	64
L3	60M	60M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,31-32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,63

node 0 size: 257381 MB

node 0 free: 256154 MB

node 1 cpus: 1,3,5,7,9,11,13,15,17,19,21,23,25,27,29-30,33,35,37,39,41,43,45,47,49,51,53,55,57,59,61-62

node 1 size: 257648 MB

node 1 free: 246785 MB

node distances:

node 0 1

0: 10 12

1: 12 10

9. /proc/meminfo

MemTotal: 527390620 kB

10. who -r

run-level 3 Mar 29 21:05

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 219

PowerEdge XR8610t (Intel Xeon Gold 6433N)

SPECrate®2017_int_peak = 227

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Apr-2024

Software Availability: Jun-2024

Platform Notes (Continued)

Default Target	Status
multi-user	running

```

-----
12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        apparmor auditd cron firewalld getty@ irqbalance issue-generator kbdsettings kdump
                kdump-early kdump-notify lvm2-monitor nvme-fc-boot-connections nvme-autoconnect postfix
                purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4
                wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled       blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell
                ebttables fsmidd grub2-once haveged issue-add-ssh-keys kexec-load lunmask nfs nfs-blkmap
                rpcbind rpmconfigcheck rsyncd serial-getty@ systemd-boot-check-no-failures systemd-confext
                systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
indirect       systemd-userdbd wickedd
-----

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=1420f0de-cf2a-452f-9c6a-d3257d093ae8
splash=silent
resume=/dev/disk/by-uuid/322e7a60-cd58-41d2-8e97-7a815c571f90
mitigations=auto
quiet
security=apparmor
crashkernel=370M,high
crashkernel=72M,low
-----

```

```

-----
14. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
-----

```

```

-----
15. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled        [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
-----

```

```

-----
16. /sys/kernel/mm/transparent_hugepage/khugepaged
-----

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 219

PowerEdge XR8610t (Intel Xeon Gold 6433N)

SPECrate®2017_int_peak = 227

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2025
Hardware Availability: Apr-2024
Software Availability: Jun-2024

Platform Notes (Continued)

```
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
```

17. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

18. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2024.1
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 60G 5.0G 56G 9% /mnt/ramdisk

19. /sys/devices/virtual/dmi/id
Vendor: Dell Inc.
Product: PowerEdge XR8610t
Product Family: PowerEdge
Serial: SLX8620

20. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
7x 002C00B3002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800, configured at 4400
1x 002C0632002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800, configured at 4400

21. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Dell Inc.
BIOS Version: 1.9.3
BIOS Date: 03/20/2024
BIOS Revision: 1.9

Compiler Version Notes

=====

```
C | 502.gcc_r(peak)
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

```
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 219

PowerEdge XR8610t (Intel Xeon Gold 6433N)

SPECrate®2017_int_peak = 227

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2025
Hardware Availability: Apr-2024
Software Availability: Jun-2024

Compiler Version Notes (Continued)

Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 219

PowerEdge XR8610t (Intel Xeon Gold 6433N)

SPECrate®2017_int_peak = 227

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Apr-2024

Software Availability: Jun-2024

Base Portability Flags (Continued)

```

520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

```

C++ benchmarks:

```

-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

```

Fortran benchmarks:

```

-w -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 219

PowerEdge XR8610t (Intel Xeon Gold 6433N)

SPECrate®2017_int_peak = 227

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Apr-2024

Software Availability: Jun-2024

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo

502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.1/lib32 -std=gnu89
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemallo

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 219

PowerEdge XR8610t (Intel Xeon Gold 6433N)

SPECrate®2017_int_peak = 227

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Apr-2024

Software Availability: Jun-2024

Peak Optimization Flags (Continued)

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.13.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.13.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-29 21:06:33-0400.

Report generated on 2025-04-22 18:11:25 by CPU2017 PDF formatter v6716.

Originally published on 2025-04-22.