



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### HPE Compute Scale-up Server 3200


(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017\_int\_base = 5610

SPECrate®2017\_int\_peak = 5780

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Mar-2025  
Hardware Availability: Sep-2023  
Software Availability: Mar-2025

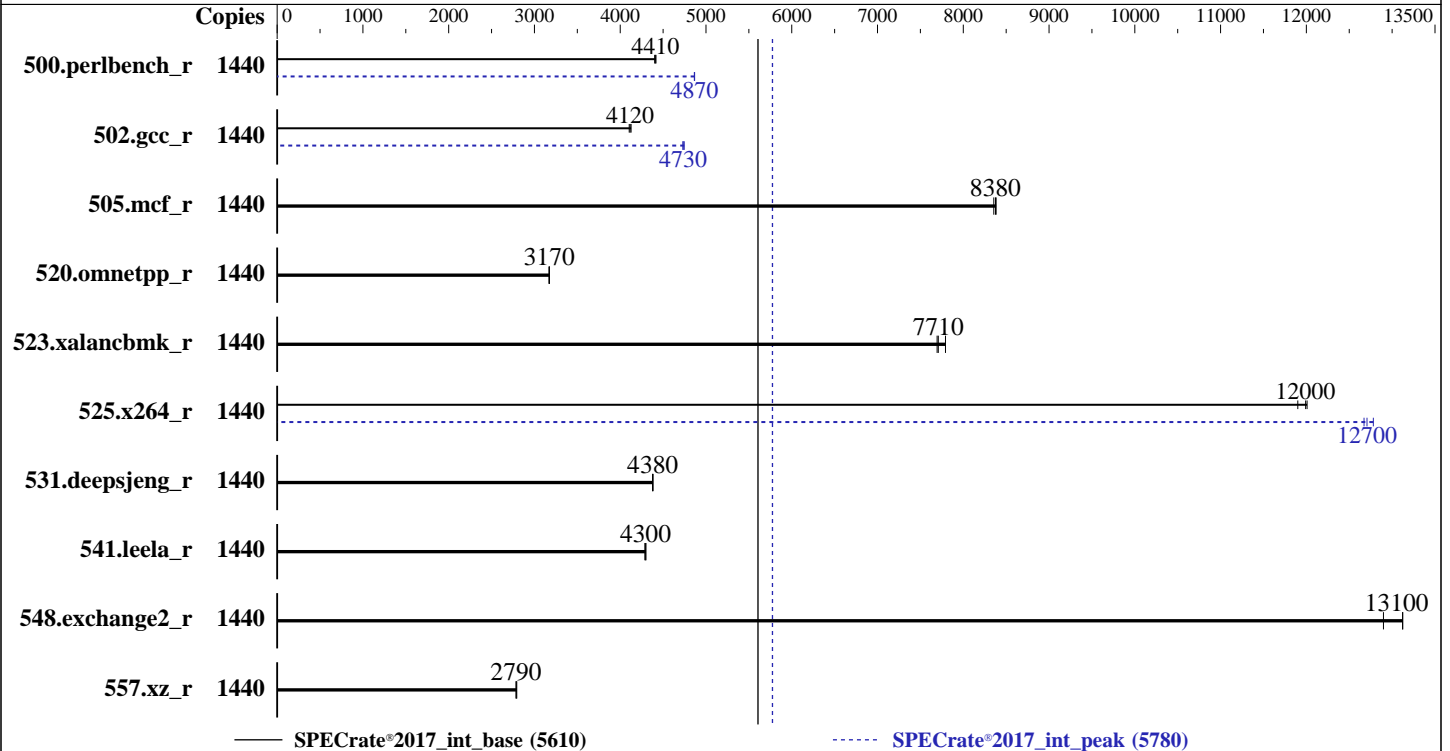

### Hardware

CPU Name: Intel Xeon Platinum 8490H  
Max MHz: 3500  
Nominal: 1900  
Enabled: 720 cores, 12 chips, 2 threads/core  
Orderable: 4, 8, 12 Chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 112.5 MB I+D on chip per chip  
Other: None  
Memory: 6 TB (96 x 64 GB 2Rx4 PC5-4800B-R)  
Storage: 1 x 1.5 TB NVMe SSD  
Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
Kernel 6.4.0-150600.23.42-default  
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;  
Parallel: No  
Firmware: HPE Firmware Bundle Version 1.55.96 03/06/2025 released  
Mar-2025  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**HPE Compute Scale-up Server 3200**

(1.90 GHz, Intel Xeon Platinum 8490H)

**SPECrate®2017\_int\_base = 5610**

**SPECrate®2017\_int\_peak = 5780**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2025  
**Hardware Availability:** Sep-2023  
**Software Availability:** Mar-2025

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio		
500.perlbench_r	1440	519	4420	<b><u>520</u></b>	<b><u>4410</u></b>	521	4400	1440	471	4870	<b><u>471</u></b>	<b><u>4870</u></b>	471	4860
502.gcc_r	1440	497	4100	494	4130	<b><u>495</u></b>	<b><u>4120</u></b>	1440	<b><u>431</u></b>	<b><u>4730</u></b>	431	4730	430	4750
505.mcf_r	1440	278	8380	<b><u>278</u></b>	<b><u>8380</u></b>	278	8360	1440	278	8380	<b><u>278</u></b>	<b><u>8380</u></b>	278	8360
520.omnetpp_r	1440	595	3170	596	3170	<b><u>595</u></b>	<b><u>3170</u></b>	1440	595	3170	596	3170	<b><u>595</u></b>	<b><u>3170</u></b>
523.xalancbmk_r	1440	198	7690	195	7790	<b><u>197</u></b>	<b><u>7710</u></b>	1440	198	7690	195	7790	<b><u>197</u></b>	<b><u>7710</u></b>
525.x264_r	1440	<b><u>210</u></b>	<b><u>12000</u></b>	210	12000	212	11900	1440	199	12700	<b><u>198</u></b>	<b><u>12700</u></b>	197	12800
531.deepsjeng_r	1440	377	4380	<b><u>377</u></b>	<b><u>4380</u></b>	377	4380	1440	377	4380	<b><u>377</u></b>	<b><u>4380</u></b>	377	4380
541.leela_r	1440	556	4290	555	4300	<b><u>555</u></b>	<b><u>4300</u></b>	1440	556	4290	555	4300	<b><u>555</u></b>	<b><u>4300</u></b>
548.exchange2_r	1440	<b><u>288</u></b>	<b><u>13100</u></b>	287	13100	292	12900	1440	<b><u>288</u></b>	<b><u>13100</u></b>	287	13100	292	12900
557.xz_r	1440	558	2790	557	2790	<b><u>558</u></b>	<b><u>2790</u></b>	1440	558	2790	557	2790	<b><u>558</u></b>	<b><u>2790</u></b>

**SPECrate®2017\_int\_base = 5610**

**SPECrate®2017\_int\_peak = 5780**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"  
MALLOCONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**HPE Compute Scale-up Server 3200**

(1.90 GHz, Intel Xeon Platinum 8490H)

**SPECrate®2017\_int\_base = 5610**

**SPECrate®2017\_int\_peak = 5780**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2025

**Hardware Availability:** Sep-2023

**Software Availability:** Mar-2025

## General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Configuration:

Workload Profile set to Custom  
Energy/Performance Bias set to Maximum Performance  
Energy Efficient Turbo set to Disabled  
Advanced Memory Protection set to Advanced ECC Support  
SR-IOV set to Disabled  
Intel Virtualization Technology (Intel VT, VT-x) set to Disabled  
Adjacent Sector Prefetch set to Disabled  
DCU Stream Prefetcher set to Disabled  
Last Level Cache (LLC) Dead Line Allocation set to Disabled  
Enhanced Processor Performance Profile set to Aggressive  
Memory Patrol Scrubbing set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on sph-187 Sat Mar 29 03:09:05 2025

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 254 (254.23+suse.141.g9376e684d0)
  12. Failed units, from systemctl list-units --state=failed
  13. Services, from systemctl list-unit-files
  14. Linux kernel boot-time arguments, from /proc/cmdline
  15. cpupower frequency-info
  16. sysctl
  17. /sys/kernel/mm/transparent\_hugepage
  18. /sys/kernel/mm/transparent\_hugepage/khugepaged
  19. OS release
  20. Disk information
  21. /sys/devices/virtual/dmi/id
  22. dmidecode
  23. BIOS
- 
1. uname -a  
Linux sph-187 6.4.0-150600.23.42-default #1 SMP PREEMPT\_DYNAMIC Fri Mar 7 09:53:00 UTC 2025 (7bf6ecd)  
x86\_64 x86\_64 x86\_64 GNU/Linux
- 
2. w  
03:09:06 up 14 min, 1 user, load average: 0.16, 1.92, 3.30

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200  
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017\_int\_base = 5610

SPECrate®2017\_int\_peak = 5780

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2025  
**Hardware Availability:** Sep-2023  
**Software Availability:** Mar-2025

### Platform Notes (Continued)

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
test	ttyS0	-	03:02	2:17	0.08s	0.04s	login -- test
test	pts/0	-	03:06	10.00s	1.59s	0.04s	sudo su

#### 3. Username

From environment variable \$USER: root  
From the command 'logname': test

#### 4. ulimit -a

```

core file size          (blocks, -c) 0
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 24377852
max locked memory      (kbytes, -l) 8192
max memory size        (kbytes, -m) unlimited
open files             (-n) 100000
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 24377852
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

#### 5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- test
-bash
sudo su
sudo su
su
bash
bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=1440 -c
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=720 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=1440 --configfile
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=720 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
  --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

#### 6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Platinum 8490H
vendor_id      : GenuineIntel
cpu family      : 6
model          : 143
stepping       : 6
microcode      : 0x2b000639
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
cpu cores      : 60
siblings       : 120

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200  
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017\_int\_base = 5610

SPECrate®2017\_int\_peak = 5780

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2025  
**Hardware Availability:** Sep-2023  
**Software Availability:** Mar-2025

## Platform Notes (Continued)

```

12 physical ids (chips)
1440 processors (hardware threads)
physical id 0: core ids 0-59
physical id 1: core ids 0-59
physical id 2: core ids 0-59
physical id 3: core ids 0-59
physical id 4: core ids 0-59
physical id 5: core ids 0-59
physical id 6: core ids 0-59
physical id 7: core ids 0-59
physical id 8: core ids 0-59
physical id 9: core ids 0-59
physical id 10: core ids 0-59
physical id 11: core ids 0-59
physical id 0: apicids 0-119
physical id 1: apicids 128-247
physical id 2: apicids 256-375
physical id 3: apicids 384-503
physical id 4: apicids 512-631
physical id 5: apicids 640-759
physical id 6: apicids 768-887
physical id 7: apicids 896-1015
physical id 8: apicids 1024-1143
physical id 9: apicids 1152-1271
physical id 10: apicids 1280-1399
physical id 11: apicids 1408-1527

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 1440
On-line CPU(s) list:   0-1439
Vendor ID:              GenuineIntel
Model name:             Intel(R) Xeon(R) Platinum 8490H
CPU family:            6
Model:                  143
Thread(s) per core:    2
Core(s) per socket:    60
Socket(s):              12
Stepping:               6
CPU(s) scaling MHz:    23%
CPU max MHz:           3500.0000
CPU min MHz:           800.0000
BogoMIPS:              3800.03
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                        pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                        pdpe1gb rdtscp lm constant_tsc arch_perfmon pebs bts rep_good nopl
                        xtopology nonstop_tsc cpuid aperfmperf pni pclmulqdq dtes64 monitor
                        ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
                        rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
                        tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**HPE Compute Scale-up Server 3200**  
(1.90 GHz, Intel Xeon Platinum 8490H)

**SPECrate®2017\_int\_base = 5610**

**SPECrate®2017\_int\_peak = 5780**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2025  
**Hardware Availability:** Sep-2023  
**Software Availability:** Mar-2025

## Platform Notes (Continued)

avx512dq rdseed adx smap avx512ifma clflushopt clwb intel\_pt avx512cd sha\_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local split\_lock\_detect user\_shstk avx\_vnni avx512\_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp\_act\_window hwp\_pkg\_req avx512vbmi umip pku ospke waitpkg avx512\_vbmi2 gfni vaes vpclmulqdq avx512\_vnni avx512\_bitalg tme avx512\_vpopcntdq la57 rdpid bus\_lock\_detect cldemote movdiri movdir64b enqcmd fsrm md\_clear serialize tsxldtrk pconfig arch\_lbr ibt amx\_bf16 avx512\_fp16 amx\_tile amx\_int8 flush\_lld arch\_capabilities

L1d cache: 33.8 MiB (720 instances)  
L1i cache: 22.5 MiB (720 instances)  
L2 cache: 1.4 GiB (720 instances)  
L3 cache: 1.3 GiB (12 instances)  
NUMA node(s): 12  
NUMA node0 CPU(s): 0-59,720-779  
NUMA node1 CPU(s): 60-119,780-839  
NUMA node2 CPU(s): 120-179,840-899  
NUMA node3 CPU(s): 180-239,900-959  
NUMA node4 CPU(s): 240-299,960-1019  
NUMA node5 CPU(s): 300-359,1020-1079  
NUMA node6 CPU(s): 360-419,1080-1139  
NUMA node7 CPU(s): 420-479,1140-1199  
NUMA node8 CPU(s): 480-539,1200-1259  
NUMA node9 CPU(s): 540-599,1260-1319  
NUMA node10 CPU(s): 600-659,1320-1379  
NUMA node11 CPU(s): 660-719,1380-1439

Vulnerability Gather data sampling: Not affected  
Vulnerability Itlb multihit: Not affected  
Vulnerability L1tf: Not affected  
Vulnerability Mds: Not affected  
Vulnerability Meltdown: Not affected  
Vulnerability Mmio stale data: Not affected  
Vulnerability Reg file data sampling: Not affected  
Vulnerability Retbleed: Not affected  
Vulnerability Spec rstack overflow: Not affected  
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS SW sequence; BHI BHI\_DIS\_S  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	33.8M	12	Data	1	64	1	64
L1i	32K	22.5M	8	Instruction	1	64	1	64
L2	2M	1.4G	16	Unified	2	2048	1	64
L3	112.5M	1.3G	15	Unified	3	122880	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 12 nodes (0-11)  
node 0 cpus: 0-59,720-779  
node 0 size: 506924 MB  
node 0 free: 505800 MB  
node 1 cpus: 60-119,780-839  
node 1 size: 508062 MB  
node 1 free: 507187 MB

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**HPE Compute Scale-up Server 3200**

(1.90 GHz, Intel Xeon Platinum 8490H)

**SPECrate®2017\_int\_base = 5610**

**SPECrate®2017\_int\_peak = 5780**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2025

**Hardware Availability:** Sep-2023

**Software Availability:** Mar-2025

## Platform Notes (Continued)

```

node 2 cpus: 120-179,840-899
node 2 size: 508062 MB
node 2 free: 507258 MB
node 3 cpus: 180-239,900-959
node 3 size: 508062 MB
node 3 free: 507271 MB
node 4 cpus: 240-299,960-1019
node 4 size: 508062 MB
node 4 free: 507481 MB
node 5 cpus: 300-359,1020-1079
node 5 size: 508062 MB
node 5 free: 507424 MB
node 6 cpus: 360-419,1080-1139
node 6 size: 508062 MB
node 6 free: 507449 MB
node 7 cpus: 420-479,1140-1199
node 7 size: 508062 MB
node 7 free: 507396 MB
node 8 cpus: 480-539,1200-1259
node 8 size: 508062 MB
node 8 free: 506742 MB
node 9 cpus: 540-599,1260-1319
node 9 size: 508024 MB
node 9 free: 507161 MB
node 10 cpus: 600-659,1320-1379
node 10 size: 508062 MB
node 10 free: 506861 MB
node 11 cpus: 660-719,1380-1439
node 11 size: 506986 MB
node 11 free: 506024 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11
0:  10 16 16 18 40 40 40 40 40 40 40 40
1:  16 10 18 16 40 40 40 40 40 40 40 40
2:  16 18 10 16 40 40 40 40 40 40 40 40
3:  18 16 16 10 40 40 40 40 40 40 40 40
4:  40 40 40 40 10 16 16 18 40 40 40 40
5:  40 40 40 40 16 10 18 16 40 40 40 40
6:  40 40 40 40 16 18 10 16 40 40 40 40
7:  40 40 40 40 18 16 16 10 40 40 40 40
8:  40 40 40 40 40 40 40 40 10 16 16 18
9:  40 40 40 40 40 40 40 40 16 10 18 16
10: 40 40 40 40 40 40 40 40 16 18 10 16
11: 40 40 40 40 40 40 40 40 18 16 16 10

```

```

-----
9. /proc/meminfo
MemTotal:      6240765740 kB

```

```

-----
10. who -r
run-level 3 Mar 29 02:57

```

```

-----
11. Systemd service manager version: systemd 254 (254.23+suse.141.g9376e684d0)
Default Target Status
multi-user      degraded

```

```

-----
12. Failed units, from systemctl list-units --state=failed

```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200  
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017\_int\_base = 5610

SPECrate®2017\_int\_peak = 5780

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2025  
**Hardware Availability:** Sep-2023  
**Software Availability:** Mar-2025

### Platform Notes (Continued)

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* dcdchkgracefulshutdown.service	loaded	failed	failed	Check if previous system shutdown was graceful
* postfix.service	loaded	failed	failed	Postfix Mail Transport Agent

#### 13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth chronyd cpuset_cpunodemap cpuset_memory_spread cron dcd dcdchkgracefulshutdown dcdshutdown display-manager getty@ hpe-auto-config hpe_irqbalance issue-generator kbdsettings kdump kdump-early kdump-notify klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore vgauthd vmblock-fuse vmtoolsd vsftpd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-fsck-root systemd-remount-fs
disabled	accounts-daemon amavis apache2 apache2@ autofs autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates certmonger chrony-wait clamav-milter clamd clamonacc console-getty cups cups-browsed cxl-monitor dcdiag debug-shell ebttables exchange-bmc-os-info firewallld fsidd gpm grub2-once haveged ipmi ipmievd irqbalance issue-add-ssh-keys kexec-load lunmask man-db-create mariadb mariadb@ multipathd named ndctl-monitor nfs nfs-blkmap nfs-server nfsserver nmb ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon smartd_generate_opts smb snmpd snmptrapd spamd spamd speech-dispatcherd srp_daemon srp_daemon_port@ sysstat systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2 update-system-flatpaks upower vncserver@ winbind ypbind
indirect	pcscd serial-getty@ systemd-userdbd tftp wickedd

#### 14. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.23.42-default
root=UUID=804ffac3-72bb-4ca7-bed1-4d64ea03e98a
rd.auto=1
console=ttyS0,115200n8
selinux=0
security=
splash=silent
mitigations=auto
console=ttyS0,115200
udev.children-max=512
nmi_watchdog=0
uv_nmi.action=kdump
add_efi_memmap
tsc=nowatchdog
earlyprintk=ttyS0,115200
log_buf_len=8M
numa_balancing=disable
crashkernel=1G,high
watchdog_thresh=60
workqueue.watchdog_thresh=120

```

#### 15. cpupower frequency-info

```

analyzing CPU 508:
  current policy: frequency should be within 800 MHz and 3.50 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes

```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### HPE Compute Scale-up Server 3200

(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017\_int\_base = 5610

SPECrate®2017\_int\_peak = 5780

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2025

**Hardware Availability:** Sep-2023

**Software Availability:** Mar-2025

## Platform Notes (Continued)

### 16. sysctl

```

kernel.numa_balancing      0
kernel.randomize_va_space  2
vm.compaction_proactiveness 20
vm.dirty_background_bytes  0
vm.dirty_background_ratio  10
vm.dirty_bytes             0
vm.dirty_expire_centisecs  3000
vm.dirty_ratio             20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold       500
vm.min_unmapped_ratio      1
vm.nr_hugepages            0
vm.nr_hugepages_mempolicy  0
vm.nr_overcommit_hugepages 0
vm.swappiness              60
vm.watermark_boost_factor  15000
vm.watermark_scale_factor  10
vm.zone_reclaim_mode       0

```

### 17. /sys/kernel/mm/transparent\_hugepage

```

defrag      always defer defer+madvice [madvice] never
enabled     [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

### 18. /sys/kernel/mm/transparent\_hugepage/khugepaged

```

alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

### 19. OS release

```

From /etc/*-release /etc/*-version
os-release           SUSE Linux Enterprise Server 15 SP6
hpe-foundation-release HPE Foundation Software 2.5.5, Build 753.1560.250305T0100.a.sles15sp6hpe-250305T0100

```

### 20. Disk information

```

SPEC is set to: /home/cpu2017
Filesystem  Type  Size  Used Avail Use% Mounted on
/dev/nvme2n1p2 xfs  1.5T  38G  1.5T   3% /

```

### 21. /sys/devices/virtual/dmi/id

```

Vendor:      HPE
Product:     Compute Scale-up Server 3200
Product Family: 1590PID03030201
Serial:      5UF2491355-000

```

### 22. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200

(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017\_int\_base = 5610

SPECrate®2017\_int\_peak = 5780

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2025

Hardware Availability: Sep-2023

Software Availability: Mar-2025

## Platform Notes (Continued)

The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

96x Samsung M321R8GA0BB0-CQKZH 64 GB 2 rank 4800

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE

BIOS Version: Bundle:1.55.96-20250319\_050100 SFW:009.036.014.000.2503060426

BIOS Date: 03/06/2025

## Compiler Version Notes

C | 502.gcc\_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C | 502.gcc\_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++ | 520.omnetpp\_r(base, peak) 523.xalancbnk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran | 548.exchange2\_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**HPE Compute Scale-up Server 3200**

(1.90 GHz, Intel Xeon Platinum 8490H)

**SPECrate®2017\_int\_base = 5610**

**SPECrate®2017\_int\_peak = 5780**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2025

**Hardware Availability:** Sep-2023

**Software Availability:** Mar-2025

## Compiler Version Notes (Continued)

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -DSPEC\_LP64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto

-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-nostandard-realloc-lhs -align array32byte -auto

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**HPE Compute Scale-up Server 3200**

(1.90 GHz, Intel Xeon Platinum 8490H)

**SPECrate®2017\_int\_base = 5610**

**SPECrate®2017\_int\_peak = 5780**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2025

**Hardware Availability:** Sep-2023

**Software Availability:** Mar-2025

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

`-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc`

## Peak Compiler Invocation

C benchmarks:

`icx`

C++ benchmarks:

`icpx`

Fortran benchmarks:

`ifx`

## Peak Portability Flags

`500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64`

`502.gcc_r: -D_FILE_OFFSET_BITS=64`

`505.mcf_r: -DSPEC_LP64`

`520.omnetpp_r: -DSPEC_LP64`

`523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX`

`525.x264_r: -DSPEC_LP64`

`531.deepsjeng_r: -DSPEC_LP64`

`541.leela_r: -DSPEC_LP64`

`548.exchange2_r: -DSPEC_LP64`

`557.xz_r: -DSPEC_LP64`

## Peak Optimization Flags

C benchmarks:

`500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs`

`-fprofile-generate(pass 1)`

`-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)`

`-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse`

`-funroll-loops -qopt-mem-layout-trans=4`

`-fno-strict-overflow`

`-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc`

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**HPE Compute Scale-up Server 3200**

(1.90 GHz, Intel Xeon Platinum 8490H)

**SPECrate®2017\_int\_base = 5610**

**SPECrate®2017\_int\_peak = 5780**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2025

**Hardware Availability:** Sep-2023

**Software Availability:** Mar-2025

## Peak Optimization Flags (Continued)

```
502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.1/lib32 -std=gnu89
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

505.mcf\_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SDSS-rev1.2.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SDSS-rev1.2.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-29 04:09:05-0400.

Report generated on 2025-04-22 18:14:10 by CPU2017 PDF formatter v6716.

Originally published on 2025-04-22.