



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute ML350 Gen12


(2.40 GHz, Intel Xeon 6520P)

SPECrate®2017_int_base = 518

SPECrate®2017_int_peak = 533

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2025
Hardware Availability: Mar-2025
Software Availability: Jun-2024

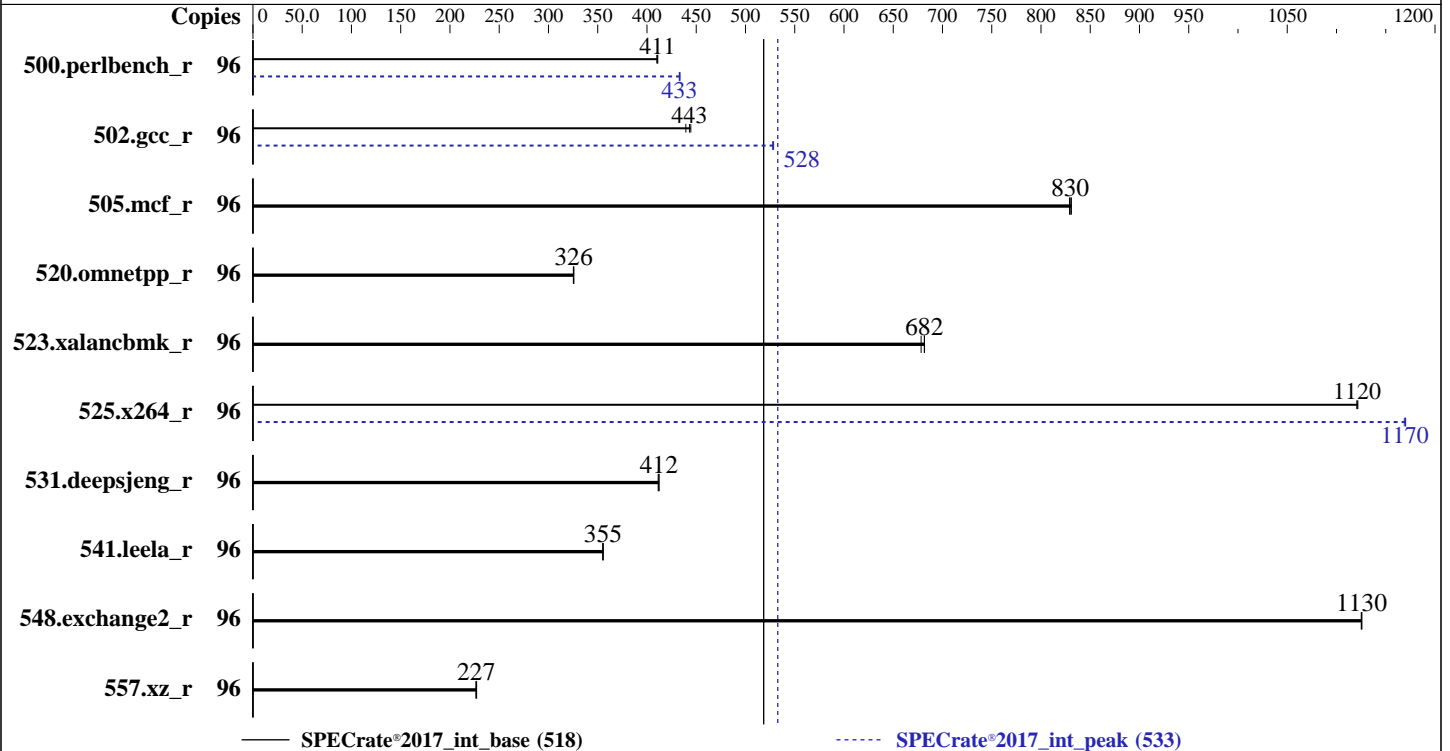

Hardware

CPU Name: Intel Xeon 6520P
 Max MHz: 4000
 Nominal: 2400
 Enabled: 48 cores, 2 chips, 2 threads/core
 Orderable: 1,2 Chips
 Cache L1: 64 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 144 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-6400B-R)
 Storage: 1 x 3.0 TB NVMe SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
 Kernel 6.4.0-150600.21-default
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: HPE BIOS Version v1.20 02/14/2025 released Feb-2025
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute ML350 Gen12

(2.40 GHz, Intel Xeon 6520P)

SPECrate®2017_int_base = 518

SPECrate®2017_int_peak = 533

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2025
Hardware Availability: Mar-2025
Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	372	411	373	410	372	411	96	353	433	353	433	352	434
502.gcc_r	96	307	443	309	439	306	445	96	257	528	258	528	257	529
505.mcf_r	96	187	831	187	830	187	829	96	187	831	187	830	187	829
520.omnetpp_r	96	387	326	387	325	387	326	96	387	326	387	325	387	326
523.xalancbmk_r	96	149	682	149	682	149	678	96	149	682	149	682	149	678
525.x264_r	96	150	1120	150	1120	150	1120	96	144	1170	144	1170	144	1170
531.deepsjeng_r	96	267	411	267	412	267	412	96	267	411	267	412	267	412
541.leela_r	96	447	356	448	355	447	355	96	447	356	448	355	447	355
548.exchange2_r	96	224	1130	223	1130	223	1130	96	224	1130	223	1130	223	1130
557.xz_r	96	457	227	457	227	458	226	96	457	227	457	227	458	226

SPECrate®2017_int_base = 518

SPECrate®2017_int_peak = 533

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute ML350 Gen12

(2.40 GHz, Intel Xeon 6520P)

SPECrate®2017_int_base = 518

SPECrate®2017_int_peak = 533

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

General Notes (Continued)

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:
Workload Profile set to General Throughput Compute
Enhanced Processor Performance Profile set to Aggressive
Thermal Configuration set to Maximum Cooling
Memory Patrol Scrubbing set to Disabled
Last Level Cache (LLC) Prefetch set to Enabled
XPT Prefetch set to disabled
Intel UPI Prefetch set to disabled
Workload Profile set to Custom
DCU Stream Prefetcher set to Disabled
Adjacent Sector Prefetch set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Sun Mar 16 00:15:52 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```

1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

```

```

2. w
00:15:52 up 23:06, 4 users, load average: 0.01, 0.00, 0.00

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute ML350 Gen12

(2.40 GHz, Intel Xeon 6520P)

SPECrate®2017_int_base = 518

SPECrate®2017_int_peak = 533

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2025
Hardware Availability: Mar-2025
Software Availability: Jun-2024

Platform Notes (Continued)

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
root	pts/0	172.17.1.109	00:13	1:49	0.01s	0.01s	-bash

3. Username

From environment variable \$USER: root

4. ulimit -a

```

core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 2062856
max locked memory      (kbytes, -l) 8192
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size            (kbytes, -s) unlimited
cpu time              (seconds, -t) unlimited
max user processes     (-u) 2062856
virtual memory         (kbytes, -v) unlimited
file locks            (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize=31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
bash -c cd $SPEC/ && $SPEC/SPR_intrate.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 -c
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=48 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 --configfile
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=48 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
  --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) 6520P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x1000380
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 24
siblings       : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-23
physical id 1: core ids 0-23
physical id 0: apicids 0-47

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute ML350 Gen12

(2.40 GHz, Intel Xeon 6520P)

SPECrate®2017_int_base = 518

SPECrate®2017_int_peak = 533

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2025
Hardware Availability: Mar-2025
Software Availability: Jun-2024

Platform Notes (Continued)

physical id 1: apicids 128-175

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                46 bits physical, 57 bits virtual
Byte Order:                   Little Endian
CPU(s):                       96
On-line CPU(s) list:         0-95
Vendor ID:                    GenuineIntel
BIOS Vendor ID:              Intel(R) Corporation
Model name:                   Intel(R) Xeon(R) 6520P
BIOS Model name:             Intel(R) Xeon(R) 6520P  CPU @ 2.4GHz
BIOS CPU family:             179
CPU family:                   6
Model:                        173
Thread(s) per core:          2
Core(s) per socket:          24
Socket(s):                    2
Stepping:                     1
BogoMIPS:                     4800.00
Flags:                         fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                               pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                               pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                               nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                               pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                               xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                               tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                               3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                               ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                               vpid ept_ad fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid
                               rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma cflushopt
                               clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                               xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                               split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                               arat pln pts hfi vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2
                               gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
                               la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm
                               md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
                               amx_tile amx_int8 flush_lld arch_capabilities
Virtualization:               VT-x
L1d cache:                    2.3 MiB (48 instances)
L1i cache:                    3 MiB (48 instances)
L2 cache:                     96 MiB (48 instances)
L3 cache:                     288 MiB (2 instances)
NUMA node(s):                 2
NUMA node0 CPU(s):           0-23,48-71
NUMA node1 CPU(s):           24-47,72-95
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:  Not affected
Vulnerability L1tf:           Not affected
Vulnerability Mds:            Not affected
Vulnerability Meltdown:       Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute ML350 Gen12

(2.40 GHz, Intel Xeon 6520P)

SPECrate®2017_int_base = 518

SPECrate®2017_int_peak = 533

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2025
Hardware Availability: Mar-2025
Software Availability: Jun-2024

Platform Notes (Continued)

Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.3M	12	Data	1	64	1	64
L1i	64K	3M	16	Instruction	1	64	1	64
L2	2M	96M	16	Unified	2	2048	1	64
L3	144M	288M	16	Unified	3	147456	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-23,48-71
node 0 size: 257726 MB
node 0 free: 248438 MB
node 1 cpus: 24-47,72-95
node 1 size: 258012 MB
node 1 free: 249062 MB
node distances:
node  0  1
  0: 10 21
  1: 21 10
```

9. /proc/meminfo

MemTotal: 528117076 kB

10. who -r

run-level 3 Mar 15 01:09

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

```
Default Target Status
multi-user      running
```

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	apparmor auditd cron getty@ irqbalance issue-generator kbdsettings postfix purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell grub2-once haveged hwloc-dump-hwdata issue-add-ssh-keys kexec-load lunmask rpmconfigcheck serial-getty@ systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd target-isns targetcli targetclid
indirect	pcsd systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute ML350 Gen12

(2.40 GHz, Intel Xeon 6520P)

SPECrate®2017_int_base = 518

SPECrate®2017_int_peak = 533

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2025
Hardware Availability: Mar-2025
Software Availability: Jun-2024

Platform Notes (Continued)

```
root=UUID=4c5d4bc8-eb79-46e6-a7c0-66cda6da7717
splash=silent
mitigations=auto
quiet
security=apparmor
```

```
-----
14. cpupower frequency-info
analyzing CPU 9:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
```

```
-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                    60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
```

```
-----
19. Disk information
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute ML350 Gen12

(2.40 GHz, Intel Xeon 6520P)

SPECrate®2017_int_base = 518

SPECrate®2017_int_peak = 533

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2025
Hardware Availability: Mar-2025
Software Availability: Jun-2024

Platform Notes (Continued)

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	btrfs	3.0T	63G	2.9T	3%	/home

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:          HPE
Product:         HPE ProLiant Compute ML350 Gen12
Product Family: ProLiant
Serial:          CZ48RP0120
-----

```

```

-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
 13x Micron MTC20F2085S1RC64BD2 MWFF 32 GB 2 rank 6400
  3x Micron MTC20F2085S1RC64BD2 QSFF 32 GB 2 rank 6400
-----

```

```

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      HPE
BIOS Version:     1.20
BIOS Date:        02/14/2025
BIOS Revision:    1.20
Firmware Revision: 1.11
-----

```

Compiler Version Notes

```

=====
C          | 502.gcc_r(peak)
-----

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
-----

```

```

=====
C          | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
          | 557.xz_r(base, peak)
-----

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
-----

```

```

=====
C          | 502.gcc_r(peak)
-----

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
-----

```

```

=====
C          | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
          | 557.xz_r(base, peak)
-----

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute ML350 Gen12

(2.40 GHz, Intel Xeon 6520P)

SPECrate®2017_int_base = 518

SPECrate®2017_int_peak = 533

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute ML350 Gen12

(2.40 GHz, Intel Xeon 6520P)

SPECrate®2017_int_base = 518

SPECrate®2017_int_peak = 533

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute ML350 Gen12

(2.40 GHz, Intel Xeon 6520P)

SPECrate®2017_int_base = 518

SPECrate®2017_int_peak = 533

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2025
Hardware Availability: Mar-2025
Software Availability: Jun-2024

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo
```

```
502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.1/lib32 -std=gnu89
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemallo
```

505.mcf_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo
```

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.1.html>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute ML350 Gen12

(2.40 GHz, Intel Xeon 6520P)

SPECrate®2017_int_base = 518

SPECrate®2017_int_peak = 533

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-15 15:15:52-0400.

Report generated on 2025-04-22 18:14:50 by CPU2017 PDF formatter v6716.

Originally published on 2025-04-22.