



SPEC® OMPG2012 Result

Copyright 2012-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: The Portland Group)

A+ Server 2022G-URF

SPECompG_peak2012 = 3.52

SPECompG_base2012 = 3.52

OMP2012 license:019


Test sponsor: The Portland Group

Tested by: The Portland Group

Test date: Jan-2013

Hardware Availability: Sep-2012

Software Availability: Jan-2013

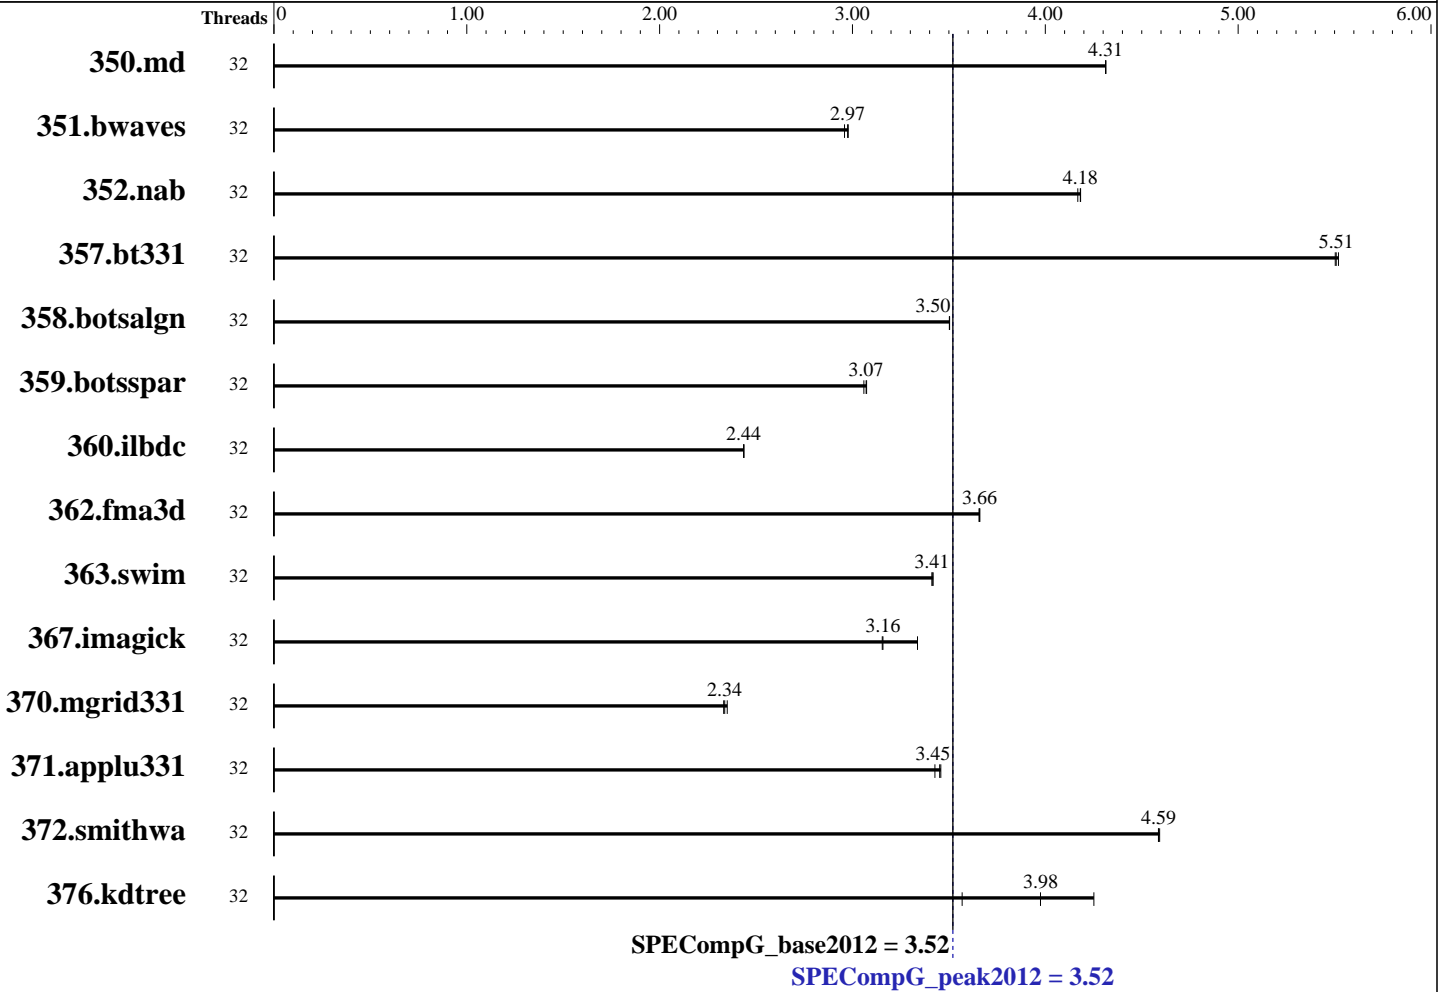

Hardware

CPU Name: AMD Opteron 6386 SE
 CPU Characteristics: AMD Turbo CORE technology up to 3.50 GHz
 CPU MHz: 2800
 CPU MHz Maximum: 3500
 FPU: Integrated
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 512 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core
 Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores
 Other Cache: None
 Memory: 64 GB (8 x 8GB 2Rx4 PC3L-12800R-11, ECC)
 Disk Subsystem: 10 x 144GB, RAID, 10000 RPM
 Other Hardware: None

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 2.6.32-220.el6.x86_64
 Compiler: C/C++/Fortran: Version 13.1 of PGI Server Complete
 Auto Parallel: No
 File System: nfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other Software: None



SPEC OMPG2012 Result

Copyright 2012-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: The Portland Group)

A+ Server 2022G-URF

SPECompG_peak2012 = 3.52

SPECompG_base2012 = 3.52

OMP2012 license:019

Test sponsor: The Portland Group

Tested by: The Portland Group

Test date: Jan-2013

Hardware Availability: Sep-2012

Software Availability: Jan-2013

Base Threads Run: 32
Minimum Peak Threads: 32
Maximum Peak Threads: 32

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
350.md	32	1074	4.31	1073	4.31	1073	4.31	32	1074	4.31	1073	4.31	1073	4.31
351.bwaves	32	1523	2.97	1531	2.96	1521	2.98	32	1523	2.97	1531	2.96	1521	2.98
352.nab	32	933	4.17	930	4.18	930	4.18	32	933	4.17	930	4.18	930	4.18
357.bt331	32	859	5.52	861	5.50	860	5.51	32	859	5.52	861	5.50	860	5.51
358.botsalgn	32	1242	3.50	1242	3.50	1242	3.50	32	1242	3.50	1242	3.50	1242	3.50
359.botsspar	32	1710	3.07	1716	3.06	1708	3.07	32	1710	3.07	1716	3.06	1708	3.07
360.ilbdc	32	1461	2.44	1461	2.44	1461	2.44	32	1461	2.44	1461	2.44	1461	2.44
362.fma3d	32	1038	3.66	1038	3.66	1039	3.66	32	1038	3.66	1038	3.66	1039	3.66
363.swim	32	1325	3.42	1327	3.41	1327	3.41	32	1325	3.42	1327	3.41	1327	3.41
367.imagick	32	2107	3.34	2229	3.15	2226	3.16	32	2107	3.34	2229	3.15	2226	3.16
370.mgrid331	32	1895	2.33	1880	2.35	1891	2.34	32	1895	2.33	1880	2.35	1891	2.34
371.applu331	32	1755	3.45	1752	3.46	1768	3.43	32	1755	3.45	1752	3.46	1768	3.43
372.smithwa	32	1168	4.59	1167	4.59	1169	4.59	32	1168	4.59	1167	4.59	1169	4.59
376.kdtree	32	1132	3.98	1261	3.57	1058	4.25	32	1132	3.98	1261	3.57	1058	4.25

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

```
Sysinfo program /scratch/cparrott/OMP2012_v1.0/Docs/sysinfo
$Rev: 395 $ $Date:: 2012-07-25 $# 8f8c0fe9e19c658963ale67685e50647
running on piledriver Tue Jan 29 16:28:23 2013
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/omp2012/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : AMD Opteron(tm) Processor 6386 SE
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 2048 KB
```

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: The Portland Group)

A+ Server 2022G-URF

SPECompG_peak2012 = 3.52

SPECompG_base2012 = 3.52

OMP2012 license:019

Test sponsor: The Portland Group

Tested by: The Portland Group

Test date: Jan-2013

Hardware Availability: Sep-2012

Software Availability: Jan-2013

Platform Notes (Continued)

```

From /proc/meminfo
  MemTotal:      66087492 kB
  HugePages_Total: 0
  Hugepagesize:  2048 kB

/usr/bin/lsb_release -d
  Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
  redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
  system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
  system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
  Linux piledriver 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
  x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Nov 9 14:31

SPEC is set to: /scratch/cparrott/OMP2012_v1.0
filesystem  Type      Size Used Avail Use% Mounted on
filer01.pgi.net:/vol/voll/scratch
  nfs      727G 129G  598G  18% /proj/scratch

Additional information from dmidecode:

(End of data from sysinfo program)

```

General Notes

```

Software Environment:
  export MP_BIND=yes
  ulimit -s unlimited

```

Base Compiler Invocation

```

C benchmarks:
  pgcc

C++ benchmarks:
  pgCC

Fortran benchmarks:
  pgfortran

```



SPEC OMPG2012 Result

Copyright 2012-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: The Portland Group)

A+ Server 2022G-URF

SPECompG_peak2012 = 3.52

SPECompG_base2012 = 3.52

OMP2012 license:019

Test sponsor: The Portland Group

Tested by: The Portland Group

Test date: Jan-2013

Hardware Availability: Sep-2012

Software Availability: Jan-2013

Base Portability Flags

350.md: -Mfree
351.bwaves: -mcmmodel=medium
357.bt331: -mcmmodel=medium
363.swim: -mcmmodel=medium

Base Optimization Flags

C benchmarks:

-mp -fast -Mipa=fast -Mipa=inline -Msmartalloc=huge -Mfprelaxed

C++ benchmarks:

-mp -fast -Mipa=fast -Mipa=inline -Msmartalloc=huge -Mfprelaxed

Fortran benchmarks:

-mp -fast -Mipa=fast -Mipa=inline -Msmartalloc=huge -Mfprelaxed

Peak Optimization Flags

C benchmarks:

352.nab: basepeak = yes

358.botsalgn: basepeak = yes

359.botsspar: basepeak = yes

367.imagick: basepeak = yes

372.smithwa: basepeak = yes

C++ benchmarks:

376.kdtree: basepeak = yes

Fortran benchmarks:

350.md: basepeak = yes

351.bwaves: basepeak = yes

357.bt331: basepeak = yes

360.ilbdc: basepeak = yes

362.fma3d: basepeak = yes

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: The Portland Group)

A+ Server 2022G-URF

SPECompG_peak2012 = 3.52

SPECompG_base2012 = 3.52

OMP2012 license:019

Test sponsor: The Portland Group

Tested by: The Portland Group

Test date: Jan-2013

Hardware Availability: Sep-2012

Software Availability: Jan-2013

Peak Optimization Flags (Continued)

363.swim: basepeak = yes

370.mgrid331: basepeak = yes

371.aplu331: basepeak = yes

The flags file that was used to format this result can be browsed at

http://www.spec.org/omp2012/flags/pgi2013_linux_flags.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/omp2012/flags/pgi2013_linux_flags.xml

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC OMP2012 v1.0.
Report generated on Tue Jul 22 13:36:16 2014 by SPEC OMP2012 PS/PDF formatter v541.
Originally published on 20 February 2013.