



SPEC® OMPG2012 Result

Copyright 2012-2016 Standard Performance Evaluation Corporation

SGI

SGI UV 300 (Intel Xeon E7-8867 v4, 2.40 GHz)

SPECompG_peak2012 = 62.0

SPECompG_base2012 = 57.0

OMP2012 license:14


Test sponsor: SGI

Tested by: SGI

Test date: Jun-2016

Hardware Availability: Jun-2016

Software Availability: Apr-2016

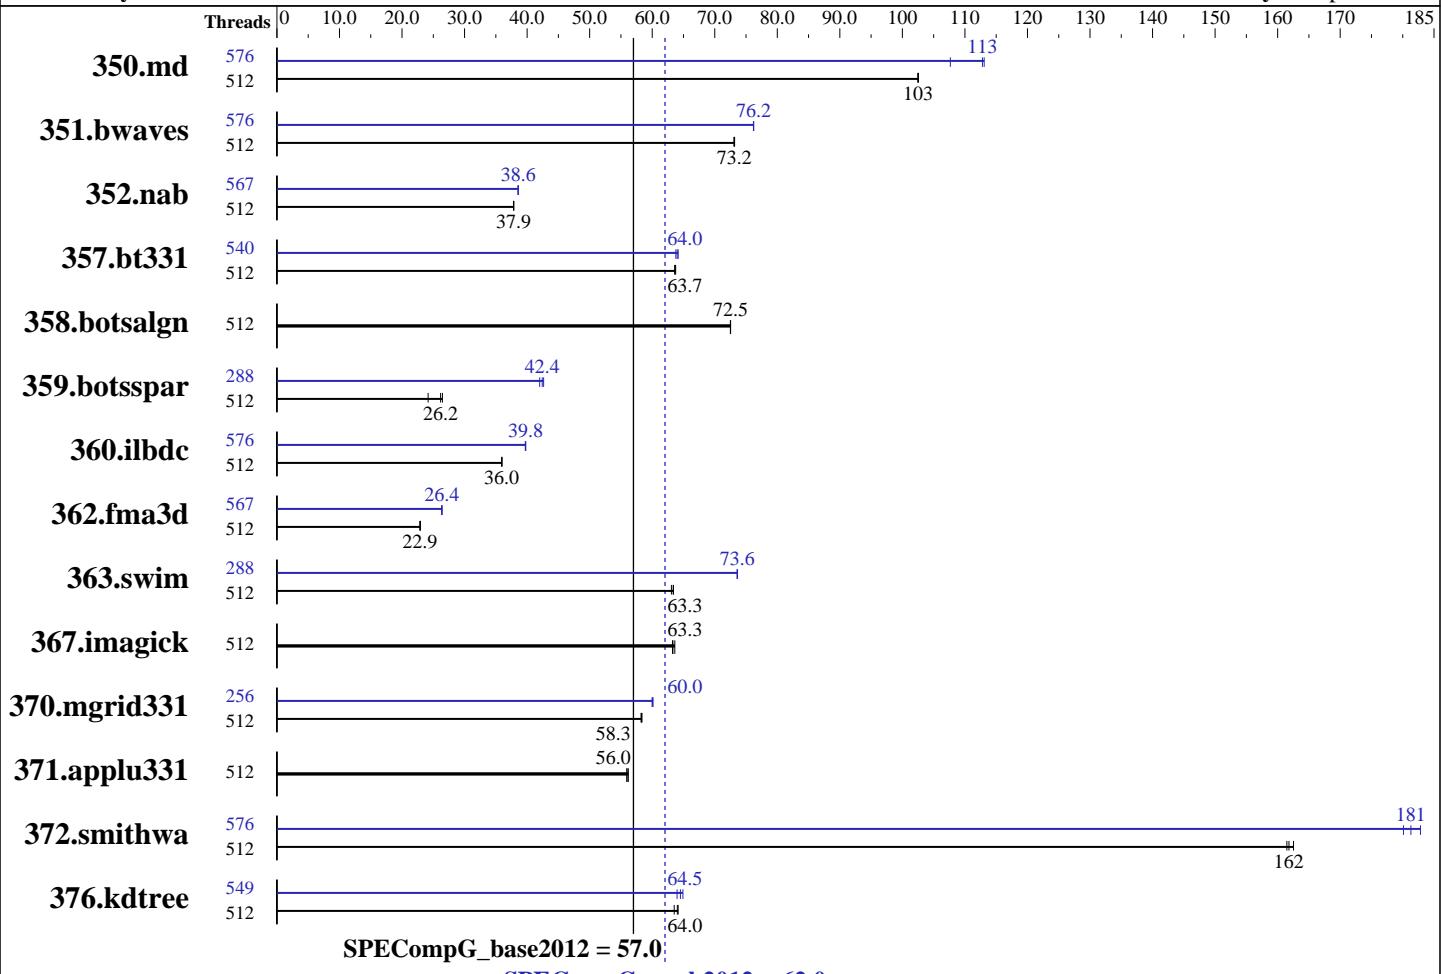

Hardware

CPU Name: Intel Xeon E7-8867 v4
CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz: 2400
CPU MHz Maximum: 3300
FPU: Integrated
CPU(s) enabled: 288 cores, 16 chips, 18 cores/chip, 2 threads/core
CPU(s) orderable: 4-32 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 45 MB I+D on chip per chip
Other Cache: None
Memory: 4 TB (256 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem: 1 x 400 GB SSD (Intel SSD 3500 Series, SATA II)
Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) SP1 Kernel 3.12.57-60.35-default
Compiler: C/C++/Fortran: Version 16.0.3.210 of Intel Composer XE for Linux, Build 20160415
Auto Parallel: No
File System: ext3
System State: Multi-user, run level 3
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other Software: SGI Accelerate 1.12 (Build 714r28.sles12sp1-1604201900), SGI Foundation Software 2.14 (Build 714r28.sles12sp1-1604201900)

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2016 Standard Performance Evaluation Corporation

SGI

SGI UV 300 (Intel Xeon E7-8867 v4, 2.40 GHz)

SPECompG_peak2012 = 62.0

OMP2012 license:14

Test date: Jun-2016

Test sponsor: SGI

Hardware Availability: Jun-2016

Tested by: SGI

Software Availability: Apr-2016

Base Threads Run: 512
Minimum Peak Threads: 256
Maximum Peak Threads: 576

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
350.md	512	45.2	102	45.1	103	<u>45.2</u>	<u>103</u>	576	40.9	113	43.0	108	<u>41.0</u>	<u>113</u>
351.bwaves	512	61.9	73.2	62.0	73.1	61.9	73.2	576	59.4	76.2	59.4	76.2	59.5	76.2
352.nab	512	<u>103</u>	<u>37.9</u>	103	37.9	103	37.8	567	<u>101</u>	<u>38.6</u>	101	38.6	<u>101</u>	<u>38.6</u>
357.bt331	512	<u>74.5</u>	<u>63.7</u>	74.5	63.6	74.4	63.8	540	74.3	63.8	<u>74.1</u>	<u>64.0</u>	<u>73.9</u>	<u>64.2</u>
358.botsalgn	512	60.0	72.5	60.0	72.5	<u>60.0</u>	<u>72.5</u>	512	60.0	72.5	60.0	72.5	<u>60.0</u>	<u>72.5</u>
359.botsspar	512	198	26.5	217	24.2	<u>201</u>	<u>26.2</u>	288	<u>124</u>	<u>42.4</u>	123	42.6	<u>125</u>	<u>42.0</u>
360.ilbdc	512	99.0	36.0	<u>99.0</u>	<u>36.0</u>	99.0	35.9	576	89.6	39.7	<u>89.5</u>	<u>39.8</u>	<u>89.5</u>	<u>39.8</u>
362.fma3d	512	166	22.9	166	22.9	<u>166</u>	<u>22.9</u>	567	144	26.4	144	26.4	<u>144</u>	<u>26.4</u>
363.swim	512	<u>71.5</u>	<u>63.3</u>	71.4	63.4	71.8	63.1	288	61.6	73.6	61.5	73.6	<u>61.5</u>	<u>73.6</u>
367.imagick	512	111	63.6	<u>111</u>	<u>63.3</u>	111	63.2	512	111	63.6	<u>111</u>	<u>63.3</u>	111	63.2
370.mgrid331	512	<u>75.8</u>	<u>58.3</u>	75.9	58.2	75.7	58.4	256	73.7	60.0	73.5	60.1	<u>73.6</u>	<u>60.0</u>
371.applu331	512	108	56.2	<u>108</u>	<u>56.0</u>	108	56.0	512	108	56.2	<u>108</u>	<u>56.0</u>	108	56.0
372.smithwa	512	33.0	163	<u>33.1</u>	<u>162</u>	33.2	161	576	29.8	180	29.3	183	<u>29.6</u>	<u>181</u>
376.kdtree	512	70.2	64.1	<u>70.3</u>	<u>64.0</u>	70.8	63.5	549	69.3	64.9	70.3	64.0	<u>69.8</u>	<u>64.5</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

For all benchmarks threads were bound to cores using the following submit command:

```
dplace -x2 $command
```

This binds threads in order of creation, beginning with the master thread on logical cpu 0, the first slave thread on logical cpu 1, and so on. The -x2 flag instructs dplace to skip placement of the lightweight OpenMP monitor thread, which is created prior to the slave threads.

Operating System Notes

Transparent Hugepages :

```
Transparent Hugepages are disabled by
echo never > /sys/kernel/mm/transparent_hugepage/enabled
```

Software Environment:

```
export KMP_AFFINITY=disabled
export KMP_STACKSIZE=200M
```

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2016 Standard Performance Evaluation Corporation

SGI

SGI UV 300 (Intel Xeon E7-8867 v4, 2.40 GHz)

SPECompG_peak2012 = 62.0

OMP2012 license:14

Test date: Jun-2016

Test sponsor: SGI

Hardware Availability: Jun-2016

Tested by: SGI

Software Availability: Apr-2016

Operating System Notes (Continued)

```
export KMP_SCHEDULE=static,balanced  
export OMP_DYNAMIC=FALSE  
ulimit -s unlimited
```

Platform Notes

Intel Hyperthreading Enabled

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Base Portability Flags

350.md: -free
367.imagick: -std=c99

Base Optimization Flags

C benchmarks:
-O3 -xCORE-AVX2 -ipo1 -openmp -ansi-alias -mcmodel=medium
-shared-intel

C++ benchmarks:
-O3 -xCORE-AVX2 -ipo1 -openmp -ansi-alias -mcmodel=medium
-shared-intel

Fortran benchmarks:
-O3 -xCORE-AVX2 -ipo1 -openmp -mcmodel=medium -shared-intel
-align array64byte

Peak Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2016 Standard Performance Evaluation Corporation

SGI

SGI UV 300 (Intel Xeon E7-8867 v4, 2.40 GHz)

SPECompG_peak2012 = 62.0

OMP2012 license:14

Test date: Jun-2016

Test sponsor: SGI

Hardware Availability: Jun-2016

Tested by: SGI

Software Availability: Apr-2016

SPECompG_base2012 = 57.0

Peak Compiler Invocation (Continued)

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Peak Portability Flags

350.md: -free
367.imagick: -std=c99

Peak Optimization Flags

C benchmarks:

352.nab: -O3 -xCORE-AVX2 -ipo1 -openmp -ansi-alias -mcmodel=medium
-shared-intel

358.botsalgn: basepeak = yes

359.botsspar: Same as 352.nab

367.imagick: basepeak = yes

372.smithwa: Same as 352.nab

C++ benchmarks:

-O3 -xCORE-AVX2 -ipo1 -openmp -ansi-alias -mcmodel=medium
-shared-intel

Fortran benchmarks:

350.md: -O3 -xCORE-AVX2 -ipo1 -openmp -mcmodel=medium
-shared-intel -align array64byte

351.bwaves: Same as 350.md

357.bt331: Same as 350.md

360.ilbdc: Same as 350.md

362.fma3d: Same as 350.md

363.swim: Same as 350.md

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2016 Standard Performance Evaluation Corporation

SGI

SGI UV 300 (Intel Xeon E7-8867 v4, 2.40 GHz)

SPECompG_peak2012 = 62.0

OMP2012 license:14

Test sponsor: SGI

Tested by: SGI

Test date: Jun-2016

Hardware Availability: Jun-2016

Software Availability: Apr-2016

Peak Optimization Flags (Continued)

370.mgrid331: Same as 350.md

371.applu331: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/omp2012/flags/SGI-OMP2012-ic16.20160706.html>

<http://www.spec.org/omp2012/flags/SGI-UV300-RevB.20160706.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/omp2012/flags/SGI-OMP2012-ic16.20160706.xml>

<http://www.spec.org/omp2012/flags/SGI-UV300-RevB.20160706.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC OMP2012 v25.

Report generated on Fri Jul 15 12:43:04 2016 by SPEC OMP2012 PS/PDF formatter v541.

Originally published on 6 July 2016.