



# SPEC® OMPG2012 Result

Copyright 2012-2018 Standard Performance Evaluation Corporation

Dell

(Test Sponsor: University of Delaware)

**SPECompG\_peak2012 = Not Run**

Dell M630 Blade (KVM virtual machine)

**SPECompG\_base2012 = 6.77**

OMP2012 license:056A


Test sponsor: University of Delaware

Tested by: University of Delaware

**Test date:** Sep-2018

**Hardware Availability:** Jun-2018

**Software Availability:** Jun-2018

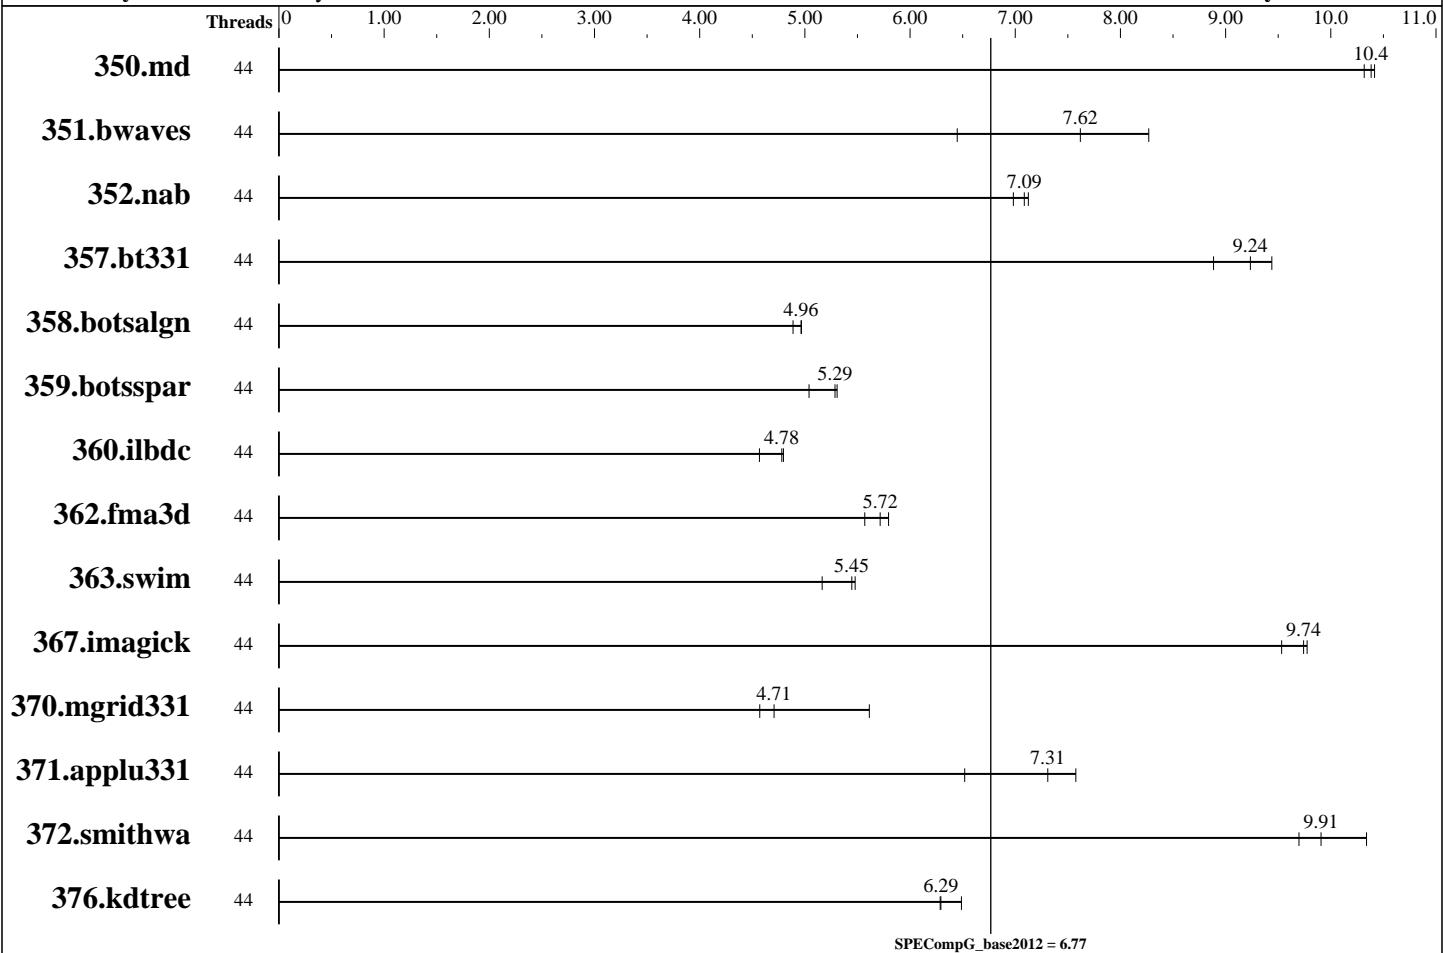

## Hardware

CPU Name: Dual Intel Xeon E5-2680 v3 (44 of 48 ht cores allocated to KVM)  
 CPU Characteristics: Intel Turbo Boost Technology off, Hyper-Threading on  
 CPU MHz: 2500  
 CPU MHz Maximum: 3300  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
 CPU(s) orderable: 1-2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx8 PC4-2133P-R)  
 118 GB (118/128 GB Allocated for KVM)  
 Disk Subsystem: 400GB (SATA Mix Use MLC 6Gbps 2.5in Hot-plug Drive, 13G (400-AEIX) dual SSDs, RAID-1)

## Software

Operating System: CentOS Linux release 7.5.1804 (Core) 3.10.0-862.3.3.el7.x86\_64  
 Compiler: C/C++/Fortran: Version 18.0.3.222 of Intel Parallel Studio XE for Linux Build 20180410  
 Auto Parallel: No  
 File System: CephFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other Software: KVM Version 2.10.0-21

Continued on next page



# SPEC OMPG2012 Result

Copyright 2012-2018 Standard Performance Evaluation Corporation

Dell

(Test Sponsor: University of Delaware)

**SPECompG\_peak2012 = Not Run**

Dell M630 Blade (KVM virtual machine)

**SPECompG\_base2012 = 6.77**

OMP2012 license:056A

Test sponsor: University of Delaware

Tested by: University of Delaware

Test date: Sep-2018

Hardware Availability: Jun-2018

Software Availability: Jun-2018

Other Hardware: None

Base Threads Run: 44

Minimum Peak Threads: --

Maximum Peak Threads: --

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Threads
350.md	44	445	10.4	446	<b>10.4</b>	449	10.3									
351.bwaves	44	548	8.27	595	<b>7.62</b>	702	6.45									
352.nab	44	<b>549</b>	<b>7.09</b>	546	7.12	557	6.98									
357.bt331	44	502	9.44	513	<b>9.24</b>	533	8.89									
358.botsalgn	44	876	4.97	876	<b>4.96</b>	890	4.89									
359.botsspar	44	989	5.31	993	<b>5.29</b>	1042	5.04									
360.ilbdc	44	742	4.80	745	<b>4.78</b>	779	4.57									
362.fma3d	44	<b>665</b>	<b>5.72</b>	682	5.57	656	5.80									
363.swim	44	827	5.48	877	5.16	<b>832</b>	<b>5.45</b>									
367.imagick	44	<b>722</b>	<b>9.74</b>	719	9.77	737	9.53									
370.mgrid331	44	787	5.61	939	<b>4.71</b>	967	4.57									
371.applu331	44	<b>829</b>	<b>7.31</b>	930	6.52	800	7.58									
372.smithwa	44	518	10.3	541	<b>9.91</b>	553	9.70									
376.kdtree	44	694	6.49	715	<b>6.29</b>	716	6.29									

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Platform Notes

```
Sysinfo program /home/tmh97/SPEC_OMP2012v1.1/Docs/sysinfo
Revision 563 of 2016-06-10 (097295389cf6073d8c3b03fa376740a5)
running on js-156-29.jetstream-cloud.org Mon Sep 17 18:45:03 2018
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/omp2012/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2680 v3 @ 2.50GHz
        44 "physical id"s (chips)
        44 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 1
        siblings : 1
        physical 0: cores 0
        physical 1: cores 0
        physical 2: cores 0
```

Continued on next page



# SPEC OMPG2012 Result

Copyright 2012-2018 Standard Performance Evaluation Corporation

Dell

(Test Sponsor: University of Delaware)

SPECompG\_peak2012 = Not Run

Dell M630 Blade (KVM virtual machine)

SPECompG\_base2012 = 6.77

OMP2012 license:056A

Test date: Sep-2018

Test sponsor: University of Delaware

Hardware Availability: Jun-2018

Tested by: University of Delaware

Software Availability: Jun-2018

## Platform Notes (Continued)

```
physical 3: cores 0
physical 4: cores 0
physical 5: cores 0
physical 6: cores 0
physical 7: cores 0
physical 8: cores 0
physical 9: cores 0
physical 10: cores 0
physical 11: cores 0
physical 12: cores 0
physical 13: cores 0
physical 14: cores 0
physical 15: cores 0
physical 16: cores 0
physical 17: cores 0
physical 18: cores 0
physical 19: cores 0
physical 20: cores 0
physical 21: cores 0
physical 22: cores 0
physical 23: cores 0
physical 24: cores 0
physical 25: cores 0
physical 26: cores 0
physical 27: cores 0
physical 28: cores 0
physical 29: cores 0
physical 30: cores 0
physical 31: cores 0
physical 32: cores 0
physical 33: cores 0
physical 34: cores 0
physical 35: cores 0
physical 36: cores 0
physical 37: cores 0
physical 38: cores 0
physical 39: cores 0
physical 40: cores 0
physical 41: cores 0
physical 42: cores 0
physical 43: cores 0
cache size : 16384 KB
```

```
From /proc/meminfo
MemTotal:      123602104 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
CentOS Linux release 7.5.1804 (Core)
```

```
From /etc/*release* /etc/*version*
```

Continued on next page



# SPEC OMPG2012 Result

Copyright 2012-2018 Standard Performance Evaluation Corporation

Dell

(Test Sponsor: University of Delaware)

SPECompG\_peak2012 = Not Run

Dell M630 Blade (KVM virtual machine)

SPECompG\_base2012 = 6.77

OMP2012 license:056A

Test date: Sep-2018

Test sponsor: University of Delaware

Hardware Availability: Jun-2018

Tested by: University of Delaware

Software Availability: Jun-2018

## Platform Notes (Continued)

```
centos-release: CentOS Linux release 7.5.1804 (Core)
centos-release-upstream: Derived from Red Hat Enterprise Linux 7.5 (Source)
os-release:
  NAME="CentOS Linux"
  VERSION="7 (Core)"
  ID="centos"
  ID_LIKE="rhel fedora"
  VERSION_ID="7"
  PRETTY_NAME="CentOS Linux 7 (Core)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:centos:centos:7"
redhat-release: CentOS Linux release 7.5.1804 (Core)
system-release: CentOS Linux release 7.5.1804 (Core)
system-release-cpe: cpe:/o:centos:centos:7
```

```
uname -a:
Linux js-156-29.jetstream-cloud.org 3.10.0-862.3.3.el7.x86_64 #1 SMP Fri Jun
15 04:15:27 UTC 2018 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 5 Sep 17 18:20
```

```
SPEC is set to: /home/tmh97/SPEC_OMP2012v1.1
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sdal       xfs   60G   40G   21G  66% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

(End of data from sysinfo program)

## General Notes

Jetstream VM Configuration:

1 VM instance running OMP2012 on single node with 44 VCPUS and 118 GB memory  
44 of the 48 available VCPUS are allocated to KVM

Environment Variables:

```
KMP_STACKSIZE=1G
ulimit -s unlimited
KMP_AFFINITY=compact
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)



# SPEC OMPG2012 Result

Copyright 2012-2018 Standard Performance Evaluation Corporation

Dell

(Test Sponsor: University of Delaware)

SPECompG\_peak2012 = Not Run

Dell M630 Blade (KVM virtual machine)

SPECompG\_base2012 = 6.77

OMP2012 license:056A

Test sponsor: University of Delaware

Tested by: University of Delaware

Test date: Sep-2018

Hardware Availability: Jun-2018

Software Availability: Jun-2018

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

350.md: -free  
357.bt331: -mcmodel=medium  
363.swim: -mcmodel=medium  
367.imagick: -std=c99

## Base Optimization Flags

C benchmarks:

-ansi-alias -qopenmp -ipo -O3 -no-prec-div -no-prec-sqrt  
-fp-model fast=2 -xHost

C++ benchmarks:

-ansi-alias -qopenmp -ipo -O3 -no-prec-div -no-prec-sqrt  
-fp-model fast=2 -xHost

Fortran benchmarks:

-qopenmp -ipo -O3 -no-prec-div -no-prec-sqrt -fp-model fast=2  
-xHost

The flags file that was used to format this result can be browsed at

<http://www.spec.org/omp2012/flags/Intel-ic17-linux64.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/omp2012/flags/Intel-ic17-linux64.xml>



# SPEC OMPG2012 Result

Copyright 2012-2018 Standard Performance Evaluation Corporation

Dell

(Test Sponsor: University of Delaware)

SPECompG\_peak2012 = Not Run

Dell M630 Blade (KVM virtual machine)

SPECompG\_base2012 = 6.77

OMP2012 license:056A

Test date: Sep-2018

Test sponsor: University of Delaware

Hardware Availability: Jun-2018

Tested by: University of Delaware

Software Availability: Jun-2018

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC OMP2012 v1.1.

Report generated on Wed Dec 19 12:52:09 2018 by SPEC OMP2012 PS/PDF formatter v541.  
Originally published on 19 December 2018.