SPEC CINT95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

Hewlett-Packard
HP 9000 Series 700 Model 715/100XC

SPECint_rate95 = 30.0

SPECint_base_rate95 = 30.0

SPEC license # 3	Tested By: HP Cupertino, CA	Test Date: Aug-95	Hardware Avail: Jun-95	Software Avail: Jan-96

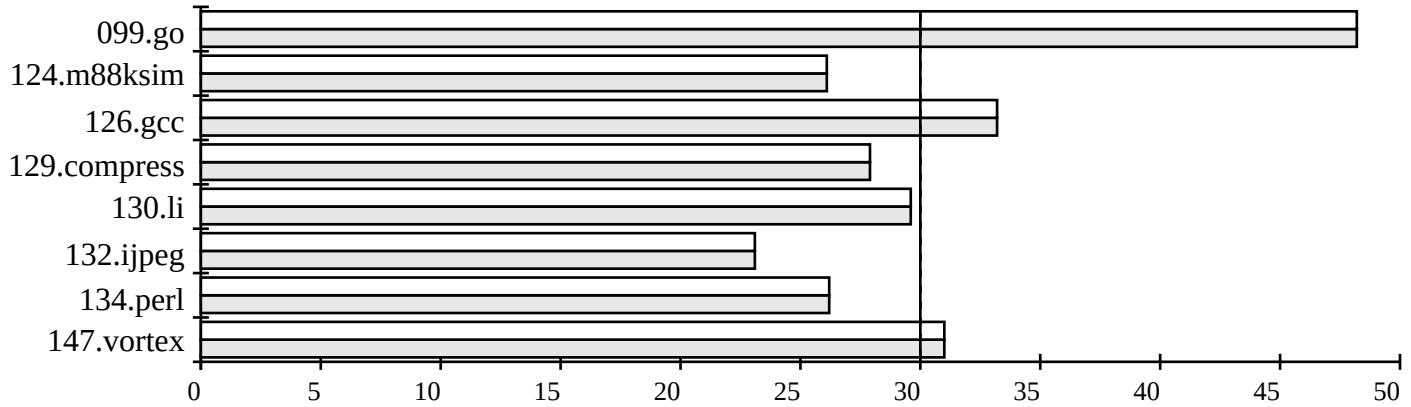

Hardware/Software Configuration for:
HP 9000 Series 700 Model 715/100XC

Hardware

Model Name:	HP 9000 Series 700 Model 715/100XC
CPU:	100 MHz PA-RISC 7100LC
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	1MB(I+D) off-chip
Secondary Cache:	None
Other Cache:	None
Memory:	64MB
Disk Subsystem:	1 SCSI-2 ST32430N 2 GB
Other Hardware:	Ethernet

Software

Operating System:	HP-UX B.10.10
Compiler:	HP92453-01 W.10.01 HP C Compiler
File System:	HP-UX
System State:	Multi-user

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
099.go	1	858	48.2	1	858	48.2
124.m88ksim	1	654	26.1	1	654	26.1
126.gcc	1	461	33.2	1	461	33.2
129.compress	1	580	27.9	1	580	27.9
130.li	1	578	29.6	1	578	29.6
132.ijpeg	1	937	23.1	1	937	23.1
134.perl	1	652	26.2	1	652	26.2
147.vortex	1	783	31.0	1	783	31.0
SPECint_base_rate95 (G. Mean)			30.0			
SPECint_rate95 (G. Mean)						30.0

Notes/Tuning Information

```
PORTABILITY FLAGS:
All: -Ae
126: -Ae -DUSG

BASE FLAGS:
All: +Oall +Onoregionsched +P
Linker Flag: All: -Wl,-a,archive

PEAK FLAGS:
Same as BASE FLAGS.

Note: The +P indicates the use of profile based optimization.
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 22110
(703) 331-0180
info@specbench.org
http://www.specbench.org