



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

**SPECint®2006 = 12.4**

## ProLiant DL385 (AMD Opteron 254)

**SPECint\_base2006 = 11.1**

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Apr-2006

Hardware Availability: Oct-2005

Software Availability: Apr-2006

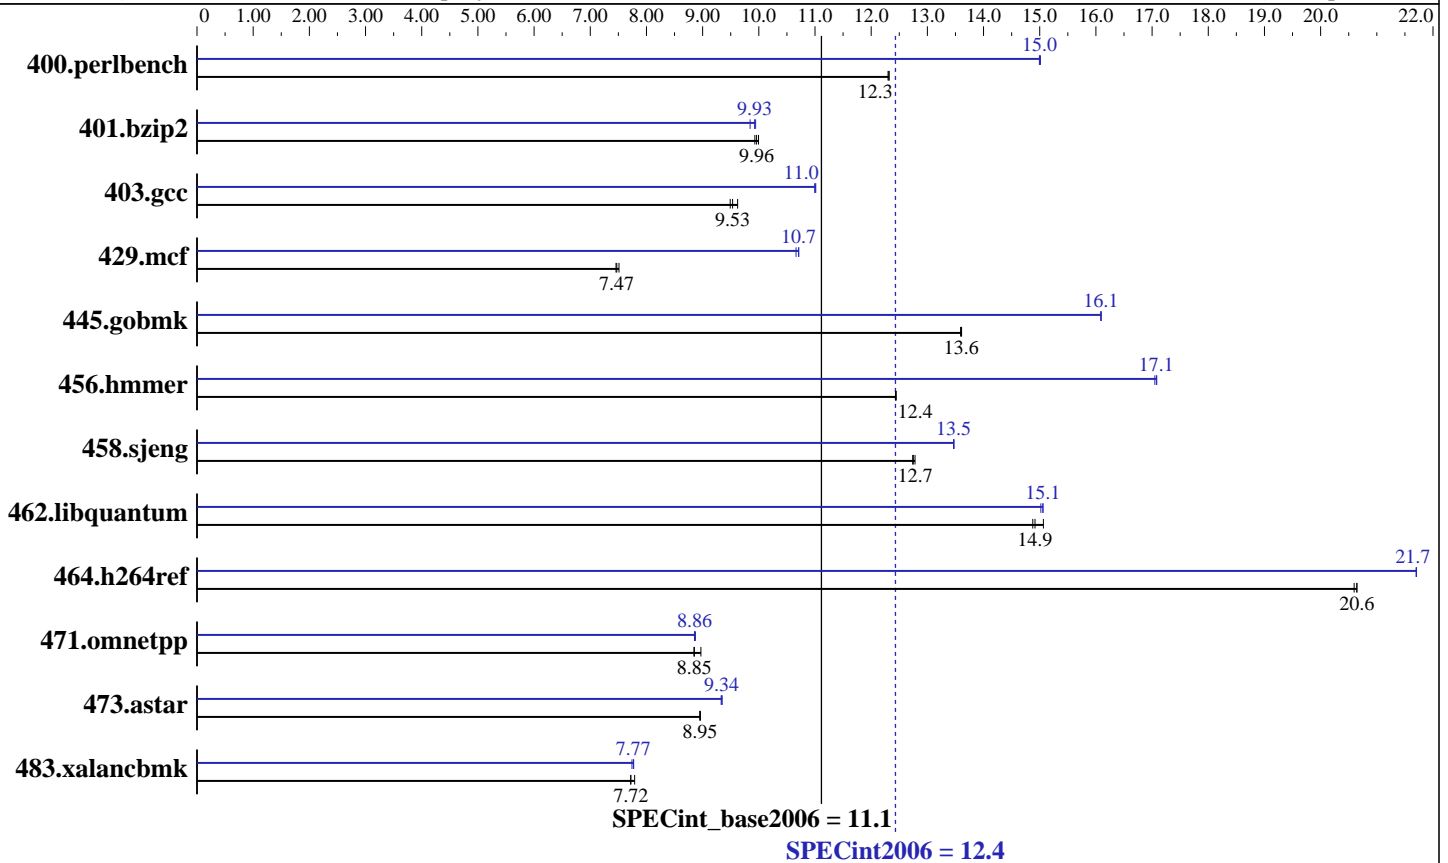

### Hardware

CPU Name: AMD Opteron 254  
 CPU Characteristics: 2.8GHz, 1MB L2 cache  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 1 core, 1 chip, 1 core/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per chip  
 Secondary Cache: 1 MB I+D on chip per chip  
 L3 Cache: None  
 Other Cache: None  
 Memory: 8 GB (4x2048 MB PC3200 CL3.0)  
 Disk Subsystem: 1x146GB 10K Ultra320 SCSI  
 Other Hardware: None

### Software

Operating System: SuSE Linux Enterprise Server 9 (x86\_64) SP 3  
 SuSE kernel 2.6.5-7.244-smp  
 Compiler: PathScale EKO Compiler Suite, Release 2.4  
 Auto Parallel: No  
 File System: ext2  
 System State: Multi-user run level 3  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 12.4

ProLiant DL385 (AMD Opteron 254)

SPECint\_base2006 = 11.1

CPU2006 license: 3

Test date: Apr-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Oct-2005

Tested by: Hewlett-Packard Company

Software Availability: Apr-2006

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	793	12.3	794	12.3	<u>793</u>	<u>12.3</u>	652	15.0	<u>651</u>	<u>15.0</u>	651	15.0
401.bzip2	<u>969</u>	<u>9.96</u>	965	9.99	972	9.93	<u>972</u>	<u>9.93</u>	970	9.94	980	9.85
403.gcc	837	9.62	<u>844</u>	<u>9.53</u>	848	9.49	<u>732</u>	<u>11.0</u>	731	11.0	732	11.0
429.mcf	1214	7.51	<u>1220</u>	<u>7.47</u>	1223	7.46	855	10.7	852	10.7	<u>852</u>	<u>10.7</u>
445.gobmk	772	13.6	<u>771</u>	<u>13.6</u>	771	13.6	652	16.1	652	16.1	<u>652</u>	<u>16.1</u>
456.hmmer	750	12.4	<u>750</u>	<u>12.4</u>	750	12.4	547	17.0	546	17.1	<u>546</u>	<u>17.1</u>
458.sjeng	947	12.8	<u>949</u>	<u>12.7</u>	950	12.7	899	13.5	<u>898</u>	<u>13.5</u>	898	13.5
462.libquantum	1375	15.1	1393	14.9	<u>1389</u>	<u>14.9</u>	1376	15.1	<u>1376</u>	<u>15.1</u>	1380	15.0
464.h264ref	1074	20.6	1072	20.6	<u>1072</u>	<u>20.6</u>	1020	21.7	1020	21.7	<u>1020</u>	<u>21.7</u>
471.omnetpp	697	8.97	<u>706</u>	<u>8.85</u>	707	8.85	<u>706</u>	<u>8.86</u>	704	8.87	706	8.85
473.astar	783	8.96	784	8.95	<u>784</u>	<u>8.95</u>	751	9.35	<u>752</u>	<u>9.34</u>	752	9.33
483.xalancbmk	886	7.79	894	7.72	<u>893</u>	<u>7.72</u>	891	7.74	<u>888</u>	<u>7.77</u>	888	7.77

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

BIOS Configuration Notes  
 Node Interleaving Disabled  
 Other Configuration Notes  
 Taskset utility used to bind process to CPU(s)

## Base Compiler Invocation

C benchmarks:  
pathcc

C++ benchmarks:  
pathCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 403.gcc: -DSPEC\_CPU\_LP64  
 429.mcf: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 12.4

ProLiant DL385 (AMD Opteron 254)

SPECint\_base2006 = 11.1

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Apr-2006

Hardware Availability: Oct-2005

Software Availability: Apr-2006

## Base Portability Flags (Continued)

464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-Ofast

C++ benchmarks:  
-Ofast -m32

## Peak Compiler Invocation

C benchmarks:  
pathcc

C++ benchmarks:  
pathCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-IPA:plimit=525 -IPA:pu\_reorder=1

401.bzip2: -O3 -LNO:ou\_prod\_max=10

403.gcc: -m32 -O3 -OPT:Ofast

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint2006 = 12.4

ProLiant DL385 (AMD Opteron 254)

SPECint\_base2006 = 11.1

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Apr-2006

Hardware Availability: Oct-2005

Software Availability: Apr-2006

## Peak Optimization Flags (Continued)

429.mcf: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -m32 -O2  
-ipa

445.gobmk: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-OPT:alias=disjoint -LNO:simd=0 -LNO:minvariant=off

456.hmmer: -O2 -OPT:alias=disjoint -WOPT:aggstr=0 -CG:cflow=0

458.sjeng: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-IPA:callee\_limit=5000 -IPA:linear=on

462.libquantum: -O3 -ipa -CG:local\_fwd\_sched=on -IPA:space=1000

464.h264ref: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-IPA:plimit=20000 -OPT:alias=disjoint -LNO:prefetch=0

C++ benchmarks:

471.omnetpp: -Ofast -IPA:pu\_reorder=2 -CG:gcm=off -m32

473.astar: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

483.xalancbmk: -Ofast -m32

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090715.04.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.04.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090715.04.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.04.xml)

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v91.

Report generated on Tue Jul 22 09:56:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 August 2006.