



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp[®]_rate2006 = 371

HP Integrity rx8640 (1.6GHz/24MB Dual-Core Intel Itanium 2)

SPECfp_rate_base2006 = 357

CPU2006 license: 03


Test date: Sep-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Sep-2006

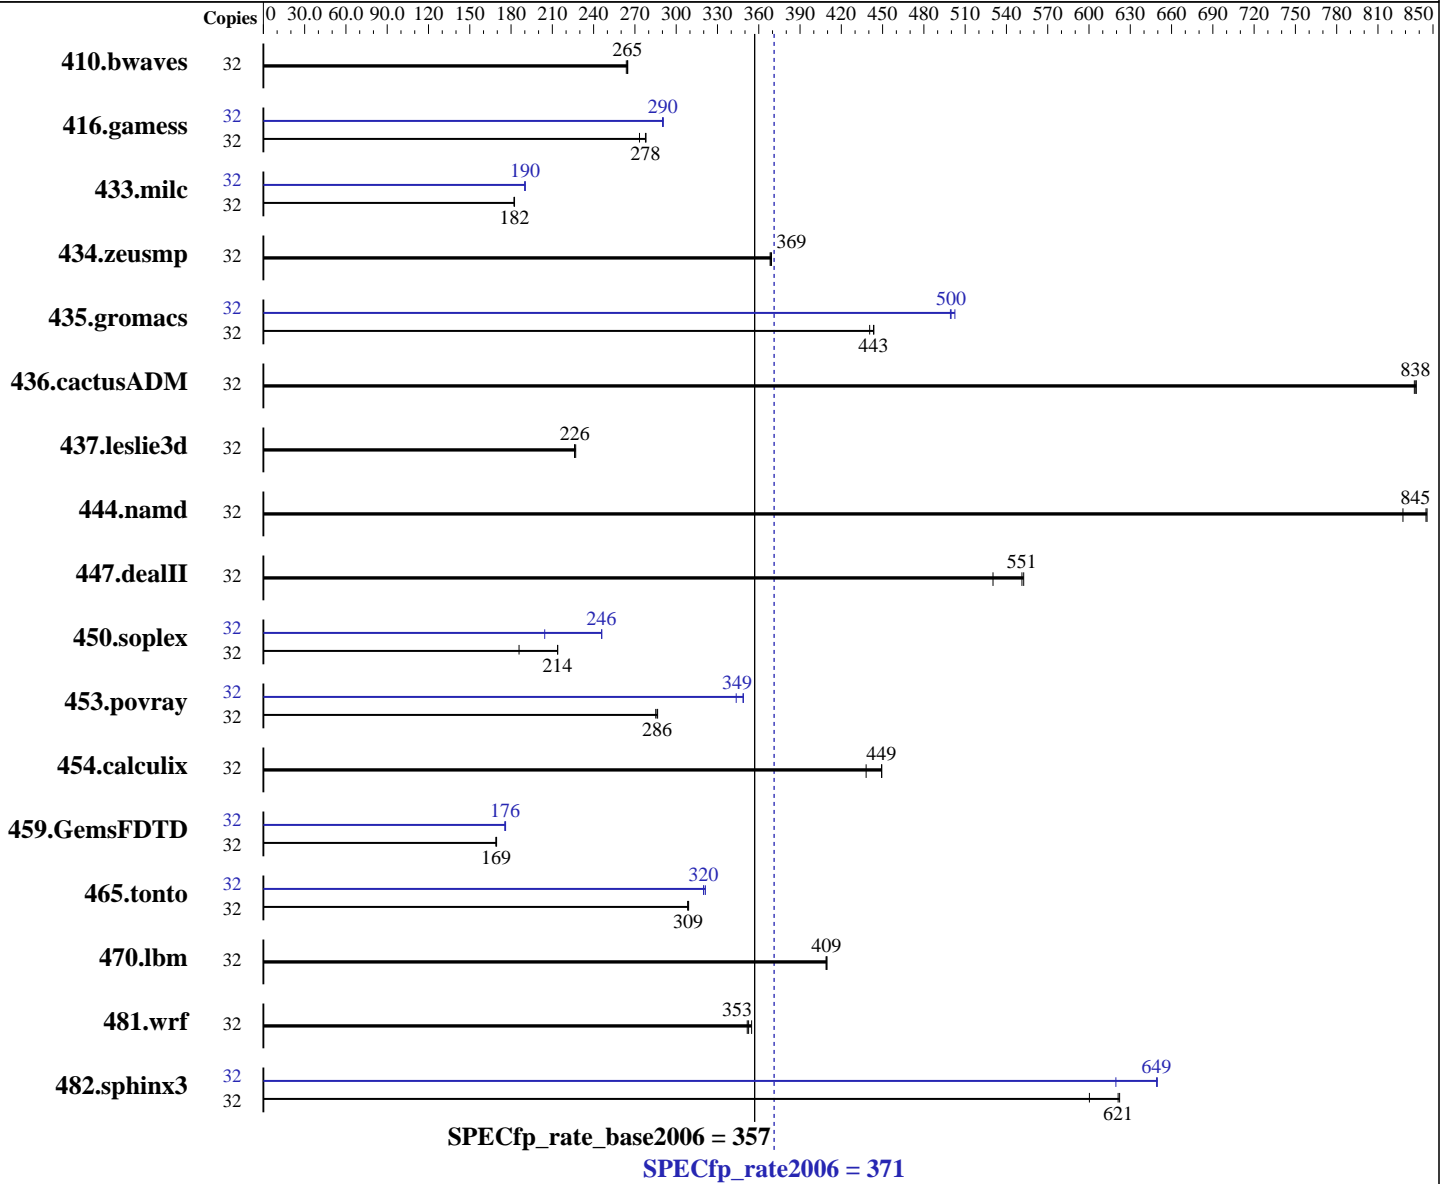

Hardware

CPU Name: Dual-Core Intel Itanium 2 9050
 CPU Characteristics: 1.6GHz/24MB, 533MHz FSB
 CPU MHz: 1600
 FPU: Integrated
 CPU(s) enabled: 32 cores, 16 chips, 2 cores/chip
 CPU(s) orderable: 1-16 chips
 Primary Cache: 16 KB I + 16 KB D on chip per core
 Secondary Cache: 1 MB I + 256 KB D on chip per core

Software

Operating System: HPUX11i-TCOE B.11.23.0609
 Compiler: HP C/aC++ Developer's Bundle C.11.23.12
 HP Fortran90 Compiler B.11.23.32
 Auto Parallel: No
 File System: vxfs
 System State: Multi-user
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: None

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 371

HP Integrity rx8640 (1.6GHz/24MB Dual-Core Intel Itanium 2)

SPECfp_rate_base2006 = 357

CPU2006 license: 03

Test date: Sep-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Sep-2006

L3 Cache: 12 MB I+D on chip per core
Other Cache: None
Memory: 128 GB (64x2GB DIMMs)
Disk Subsystem: 73GB 15K RPM SCSI
Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1649	264	1643	265	1642	265	32	1649	264	1643	265	1642	265
416.gamess	32	2292	273	2253	278	2257	278	32	2158	290	2160	290	2156	291
433.milc	32	1613	182	1610	182	1609	183	32	1544	190	1544	190	1547	190
434.zeusmp	32	790	369	789	369	791	368	32	790	369	789	369	791	368
435.gromacs	32	519	441	515	444	515	443	32	457	500	458	499	455	503
436.cactusADM	32	457	838	456	838	457	836	32	457	838	456	838	457	836
437.leslie3d	32	1329	226	1330	226	1325	227	32	1329	226	1330	226	1325	227
444.namd	32	310	828	304	845	303	846	32	310	828	304	845	303	846
447.dealII	32	664	551	690	530	663	553	32	664	551	690	530	663	553
450.soplex	32	1436	186	1248	214	1248	214	32	1305	204	1085	246	1086	246
453.povray	32	597	285	594	287	595	286	32	495	344	488	349	488	349
454.calculix	32	603	438	588	449	587	449	32	603	438	588	449	587	449
459.GemsFDTD	32	2003	169	2006	169	2009	169	32	1933	176	1934	176	1929	176
465.tonto	32	1021	308	1020	309	1019	309	32	980	321	984	320	984	320
470.lbm	32	1075	409	1074	409	1073	410	32	1075	409	1074	409	1073	410
481.wrf	32	1014	353	1017	352	1007	355	32	1014	353	1017	352	1007	355
482.sphinx3	32	1039	600	1004	621	1002	622	32	1007	620	960	650	961	649

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

The system had the September 2006 HP-UX 11i v2 Technical Computing Operating Environment (TCOE) and compilers installed, along with the following patches:

```

PHSS_34858 linker + fdp cumulative patch
PHSS_34853 Math Library Cumulative Patch
PHSS_34854 Integrity Unwind Library
PHSS_34855 HP C Compiler (A.06.12)
PHSS_34856 aC++ Compiler (A.06.12)
PHSS_34857 u2comp/be/plugin library patch
PHSS_34395 FORTRAN I/O Library [libIO77]
PHSS_34397 FORTRAN Intrinsics [libF90 B.11.23.17]
PHSS_34399 Fortran Product Patch, v3.1 to v3.1.1
PHKL_34020 Perfmon enhancements and Itanium Dual-Core

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 371

HP Integrity rx8640 (1.6GHz/24MB Dual-Core
Intel Itanium 2)

SPECfp_rate_base2006 = 357

CPU2006 license: 03

Test date: Sep-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Sep-2006

Operating System Notes (Continued)

The following kernel tunables were set, in addition to the defaults set by the Technical Computing OE:

```
dbc_max_pct=20
dbc_min_pct=20
maxdsiz=3221225472
maxssiz=401604608
```

Platform Notes

The system was configured as a single partition with 4 cells and 4 processors (8 cores) per cell. Memory was configured as 50% local and 50% interleaved.

The following config file entry was used to bind processes to cells using the HP-UX "mpsched" utility:
submit = let "MYNUM=\$SPECCOPYNUM" ; let "LDOM=\\$MYNUM/8" ; mpsched -l \\$LDOM \$command

Base Compiler Invocation

C benchmarks:
/opt/ansic/bin/cc -Ae

C++ benchmarks:
/opt/aCC/bin/aCC -Aa

Fortran benchmarks:
/opt/fortran90/bin/f90

Benchmarks using both Fortran and C:
/opt/ansic/bin/cc -Ae /opt/fortran90/bin/f90

Base Portability Flags

```
453.povray: -DSPEC_CPU_NEED_INVHYP
454.calculix: -DSPEC_CPU_NOZMODIFIER
481.wrf: -DNOUNDERSCORE +noppu
```

Base Optimization Flags

C benchmarks:
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 371

HP Integrity rx8640 (1.6GHz/24MB Dual-Core
Intel Itanium 2)

SPECfp_rate_base2006 = 357

CPU2006 license: 03

Test date: Sep-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Sep-2006

Base Optimization Flags (Continued)

C++ benchmarks:

+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N

Fortran benchmarks:

+Ofaster -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M -Wl,-N

Benchmarks using both Fortran and C:

+Ofaster(-hp_cc) +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M +Ofaster(-hp_f90) -Wl,-N

Peak Compiler Invocation

C benchmarks:

/opt/ansic/bin/cc -Ae

C++ benchmarks:

/opt/aCC/bin/aCC -Aa

Fortran benchmarks:

/opt/fortran90/bin/f90

Benchmarks using both Fortran and C:

/opt/ansic/bin/cc -Ae /opt/fortran90/bin/f90

Peak Portability Flags

453.povray: -DSPEC_CPU_NEED_INVHYP
454.calculix: -DSPEC_CPU_NOZMODIFIER
481.wrf: -DNOUNDERSCORE +noppu

Peak Optimization Flags

C benchmarks:

433.milc: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M +Onoparmsoverlap -Wl,-N

470.lbm: basepeak = yes

482.sphinx3: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M +Onoparmsoverlap

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 371

HP Integrity rx8640 (1.6GHz/24MB Dual-Core Intel Itanium 2)

SPECfp_rate_base2006 = 357

CPU2006 license: 03

Test date: Sep-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Sep-2006

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: basepeak = yes

447.dealIII: basepeak = yes

450.soplex: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M +Onoparmsoverlap -Wl,-N

453.povray: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: +Ofaster -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M
+Odataprefetch=direct -Wl,-N

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
-Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M
+Odataprefetch=direct -Wl,-N

465.tonto: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
-Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M
+Odataprefetch=direct

Benchmarks using both Fortran and C:

435.gromacs: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)
+Ofaster(-hp_cc) +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap +Ofaster(-hp_f90)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.06.html



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 371

HP Integrity rx8640 (1.6GHz/24MB Dual-Core
Intel Itanium 2)

SPECfp_rate_base2006 = 357

CPU2006 license: 03

Test date: Sep-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Sep-2006

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.06.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:06:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 October 2006.