SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

HP Integrity rx6600 (1.6GHz/24MB Dual-Core Intel Itanium 2)

SPECint®_rate2006 = 102

SPECint_rate_base2006 = 94.7

CPU2006 license: 03
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Aug-2006
Hardware Availability: Sep-2006
Software Availability: Sep-2006

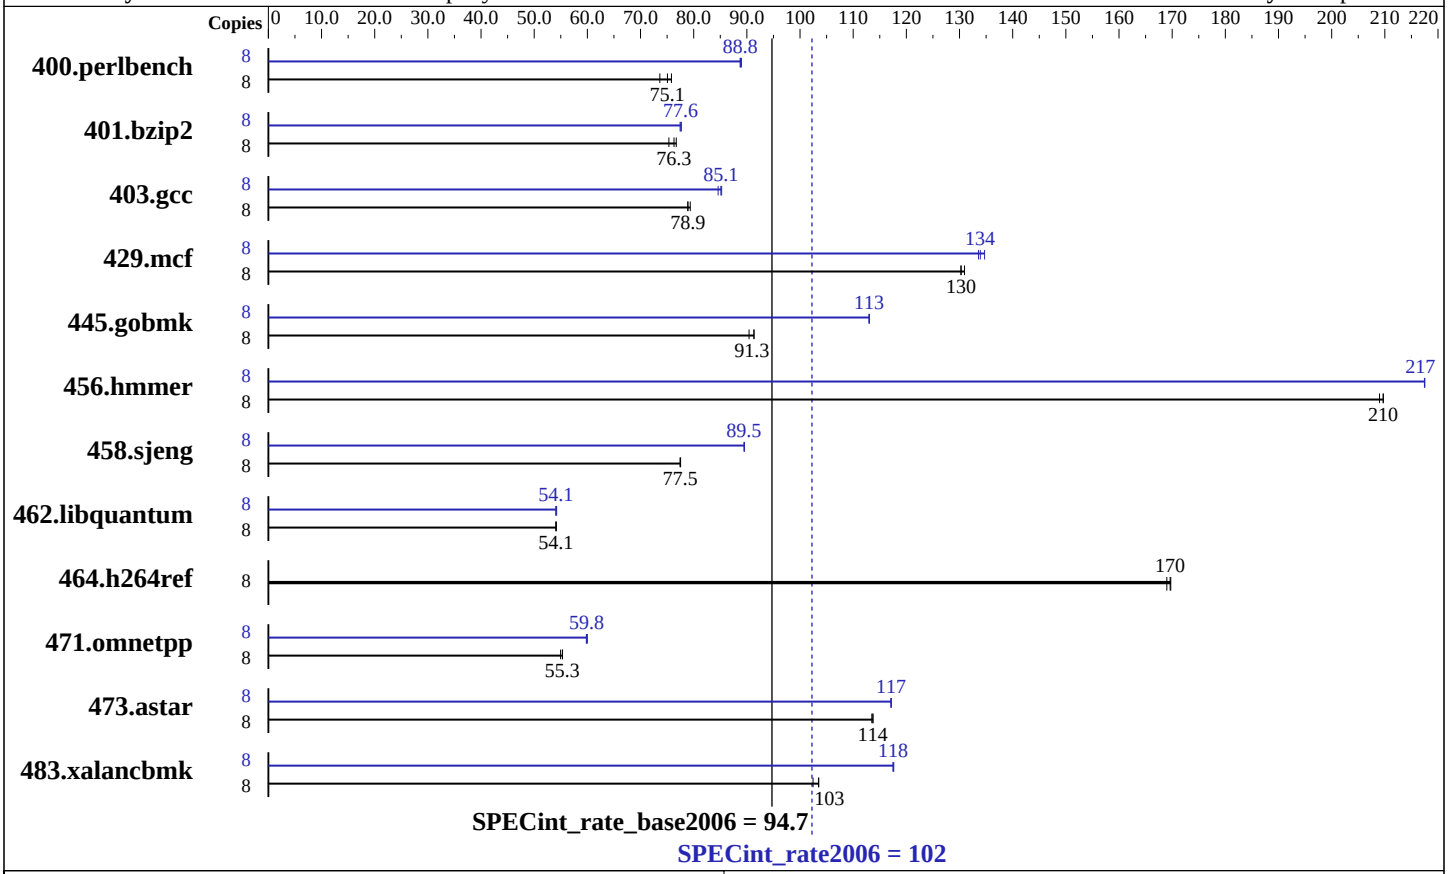

Hardware

CPU Name:	Dual-Core Intel Itanium 2 9050
CPU Characteristics:	1.6GHz/24MB, 533MHz FSB
CPU MHz:	1600
FPU:	Integrated
CPU(s) enabled:	8 cores, 4 chips, 2 cores/chip
CPU(s) orderable:	1-4 chips
Primary Cache:	16 KB I + 16 KB D on chip per core
Secondary Cache:	1 MB I + 256 KB D on chip per core
L3 Cache:	12 MB I+D on chip per core
Other Cache:	None
Memory:	24 GB (24x1GB DIMMs)
Disk Subsystem:	73GB 10K RPM SAS
Other Hardware:	None

Software

Operating System:	HPUX11i-TCOE B.11.23.0609
Compiler:	HP C/aC++ Developer's Bundle C.11.23.12
Auto Parallel:	No
File System:	vxfs
System State:	Multi-user
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	MicroQuill Smartheap 8.0

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

HP Integrity rx6600 (1.6GHz/24MB Dual-Core Intel Itanium 2)

SPECint_rate2006 = 102

SPECint_rate_base2006 = 94.7

CPU2006 license: 03
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Aug-2006
Hardware Availability: Sep-2006
Software Availability: Sep-2006

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	1061	73.6	**1041**	**75.1**	1031	75.8	8	**880**	**88.8**	878	89.0	881	88.7
401.bzip2	8	1025	75.3	**1012**	**76.3**	1006	76.7	8	**995**	**77.6**	994	77.7	997	77.4
403.gcc	8	816	78.9	812	79.4	**816**	**78.9**	8	755	85.3	761	84.6	**757**	**85.1**
429.mcf	8	560	130	**560**	**130**	557	131	8	546	134	542	135	**545**	**134**
445.gobmk	8	928	90.4	**919**	**91.3**	919	91.3	8	**743**	**113**	743	113	742	113
456.hmmer	8	357	209	356	210	**356**	**210**	8	343	218	**343**	**217**	343	217
458.sjeng	8	1250	77.5	1248	77.5	**1250**	**77.5**	8	1082	89.5	**1082**	**89.5**	1081	89.6
462.libquantum	8	**3064**	**54.1**	3061	54.2	3065	54.1	8	3065	54.1	**3064**	**54.1**	3057	54.2
464.h264ref	8	1048	169	**1044**	**170**	1043	170	8	1048	169	**1044**	**170**	1043	170
471.omnetpp	8	910	55.0	904	55.3	**904**	**55.3**	8	**836**	**59.8**	836	59.8	833	60.0
473.astar	8	495	114	**494**	**114**	494	114	8	**479**	**117**	479	117	480	117
483.xalancbmk	8	539	102	**533**	**103**	533	104	8	**470**	**118**	470	117	469	118

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
The system had the September 2006 HP-UX 11i v2 Technical Computing
Operating Environment (TCOE) and compilers installed, along with
the following patches:

PHSS_34858  linker + fdp cumulative patch
PHSS_34853  Math Library Cumulative Patch
PHSS_34854  Integrity Unwind Library
PHSS_34855  HP C Compiler (A.06.12)
PHSS_34856  aC++ Compiler (A.06.12)
PHSS_34857  u2comp/be/plugin library patch
PHSS_34395  FORTRAN I/O Library [libIO77]
PHSS_34397  FORTRAN Intrinsics [libF90 B.11.23.17]
PHSS_34399  Fortran Product Patch, v3.1 to v3.1.1
PHKL_34020  Perfmon enhancements and Itanium Dual-Core

The following kernel tunables were set, in addition to the defaults
set by the Technical Computing OE:

dbc_max_pct=20
dbc_min_pct=20
maxdsiz=3221225472
maxssiz=401604608
```

Base Compiler Invocation

C benchmarks:
```
/opt/ansic/bin/cc -Ae
```

C++ benchmarks:
```
/opt/aCC/bin/aCC -Aa
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_HPUX_IA64
403.gcc: -DSPEC_CPU_HPUX
462.libquantum: -DSPEC_CPU_HPUX
483.xalancbmk: -DSPEC_CPU_HPUX_IA64

Base Optimization Flags

C benchmarks:
```
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N
```

C++ benchmarks:
```
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmartheap.a
```

Peak Compiler Invocation

C benchmarks:
```
/opt/ansic/bin/cc -Ae
```

C++ benchmarks:
```
/opt/aCC/bin/aCC -Aa
```

Peak Portability Flags

400.perlbench: -DSPEC_CPU_HPUX_IA64
403.gcc: -DSPEC_CPU_HPUX
462.libquantum: -DSPEC_CPU_HPUX
483.xalancbmk: -DSPEC_CPU_HPUX_IA64

Peak Optimization Flags

C benchmarks:

400.perlbench: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M -Wl,-N

401.bzip2: Same as 400.perlbench

403.gcc: Same as 400.perlbench

429.mcf: Same as 400.perlbench

445.gobmk: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M +Odataprefetch=direct

456.hmmer: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M

458.sjeng: Same as 445.gobmk

462.libquantum: Same as 456.hmmer

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmartheap.a

473.astar: +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmartheap.a

483.xalancbmk: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2)
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared
-Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap
/usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmartheap.a

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.06.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.06.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

HP Integrity rx6600 (1.6GHz/24MB Dual-Core Intel Itanium 2)

SPECint_rate2006 = 102

SPECint_rate_base2006 = 94.7

CPU2006 license: 03
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Aug-2006
Hardware Availability: Sep-2006
Software Availability: Sep-2006

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:08:18 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 October 2006.