



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint®2006 = 10.5

NovaScale B280 (Intel Xeon processor 5110,1.60GHz)

SPECint_base2006 = 10.1

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Dec-2006

Hardware Availability: Jan-2007

Software Availability: Dec-2006

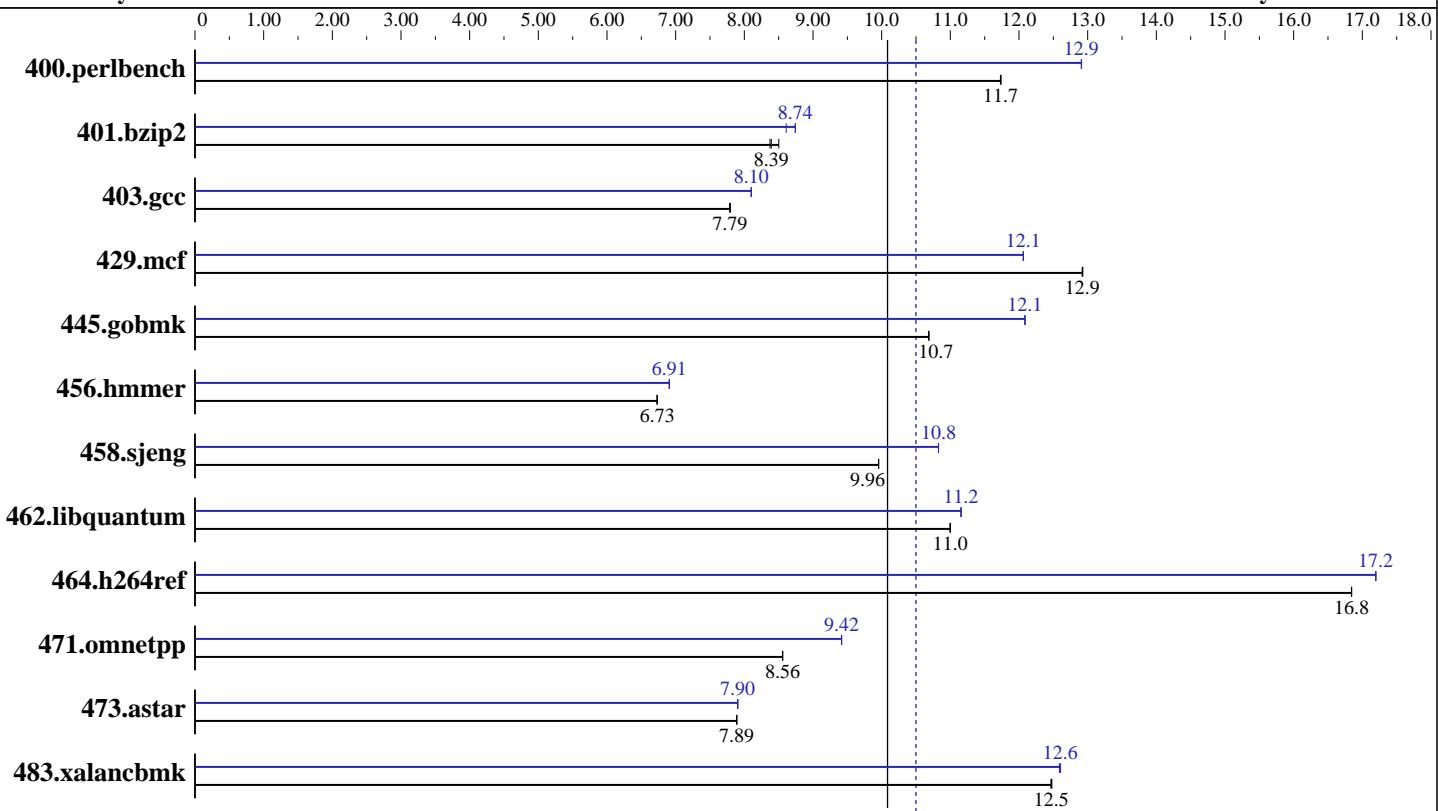

SPECint_base2006 = 10.1

SPECint2006 = 10.5

Hardware

CPU Name: Intel Xeon 5110
CPU Characteristics: 1.60 GHz, 4MB L2, 1066MHz bus
CPU MHz: 1600
FPU: Integrated
CPU(s) enabled: 1 core, 1 chip, 2 cores/chip
CPU(s) orderable: 1 to 2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 4 MB I+D on chip per chip
L3 Cache: None
Other Cache: None
Memory: 8 GB (1GB DIMMx8, FB-DIMM PC2-5300F ECC CL5)
Disk Subsystem: 73 GB SAS, 10000RPM
Other Hardware: None

Software

Operating System: Windows Server 2003 Enterprise Edition (32 bits)
Service Pack1
Compiler: Intel C++ Compiler for IA32 version 9.1
Package ID W_CC_C_9.1.033 Build no 20061103Z
Microsoft Visual Studio .NET 2003 (lib & linker)
Auto Parallel: No
File System: NTFS
System State: Default
Base Pointers: 32-bit
Peak Pointers: 32-bit
Other Software: MicroQuill SmartHeap Library 8.0 (shlw32M.lib)



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = 10.5

NovaScale B280 (Intel Xeon processor 5110,1.60GHz)

SPECint_base2006 = 10.1

CPU2006 license: 20

Test date: Dec-2006

Test sponsor: Bull SAS

Hardware Availability: Jan-2007

Tested by: Bull SAS

Software Availability: Dec-2006

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
400.perlbench	833	11.7	833	11.7	832	11.7	757	12.9	757	12.9	757	12.9
401.bzip2	1150	8.39	1152	8.37	1135	8.50	1104	8.74	1121	8.61	1104	8.74
403.gcc	1033	7.80	1033	7.79	1034	7.79	994	8.10	994	8.10	993	8.10
429.mcf	705	12.9	706	12.9	706	12.9	756	12.1	756	12.1	756	12.1
445.gobmk	982	10.7	982	10.7	982	10.7	868	12.1	868	12.1	868	12.1
456.hmmer	1386	6.73	1386	6.73	1386	6.73	1351	6.91	1351	6.91	1351	6.91
458sjeng	1215	9.96	1216	9.95	1215	9.96	1117	10.8	1118	10.8	1118	10.8
462.libquantum	1884	11.0	1884	11.0	1884	11.0	1857	11.2	1857	11.2	1857	11.2
464.h264ref	1314	16.8	1314	16.8	1314	16.8	1287	17.2	1287	17.2	1287	17.2
471.omnetpp	730	8.56	730	8.56	730	8.56	664	9.42	664	9.42	664	9.42
473.astar	890	7.89	890	7.89	890	7.89	888	7.90	888	7.90	888	7.90
483.xalancbmk	553	12.5	553	12.5	554	12.5	547	12.6	548	12.6	548	12.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Other Configuration Notes

/NUMPROC=1 flag was added to boot.ini to invoke uniprocessor environment

Base Compiler Invocation

C benchmarks:

icl -Qvc7.1 -Qc99

C++ benchmarks:

icl -Qvc7.1

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32

464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32

Base Optimization Flags

C benchmarks:

-fast /F5120000000 shlw32m.lib

-link /FORCE:MULTIPLE

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale B280 (Intel Xeon processor 5110,1.60GHz)

SPECint2006 = 10.5

SPECint_base2006 = 10.1

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Dec-2006

Hardware Availability: Jan-2007

Software Availability: Dec-2006

Base Optimization Flags (Continued)

C++ benchmarks:

```
-fast -Qcxx_features /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks:

```
icl -Qvc7.1 -Qc99
```

C++ benchmarks:

```
icl -Qvc7.1
```

Peak Portability Flags

```
403.gcc: -DSPEC_CPU_WIN32  
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
```

Peak Optimization Flags

C benchmarks:

```
-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE
```

C++ benchmarks:

```
-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx_features  
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE
```

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = 10.5

NovaScale B280 (Intel Xeon processor 5110,1.60GHz)

SPECint_base2006 = 10.1

CPU2006 license: 20

Test date: Dec-2006

Test sponsor: Bull SAS

Hardware Availability: Jan-2007

Tested by: Bull SAS

Software Availability: Dec-2006

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/flags.20090714.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/flags.20090714.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 10:15:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 6 February 2007.