



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp[®]_rate2006 = 62.5

Bull Escala PL450R+ (2100 MHz, 4 CPU)

SPECfp_rate_base2006 = 57.2

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jan-2007

Hardware Availability: Feb-2006

Software Availability: Dec-2006

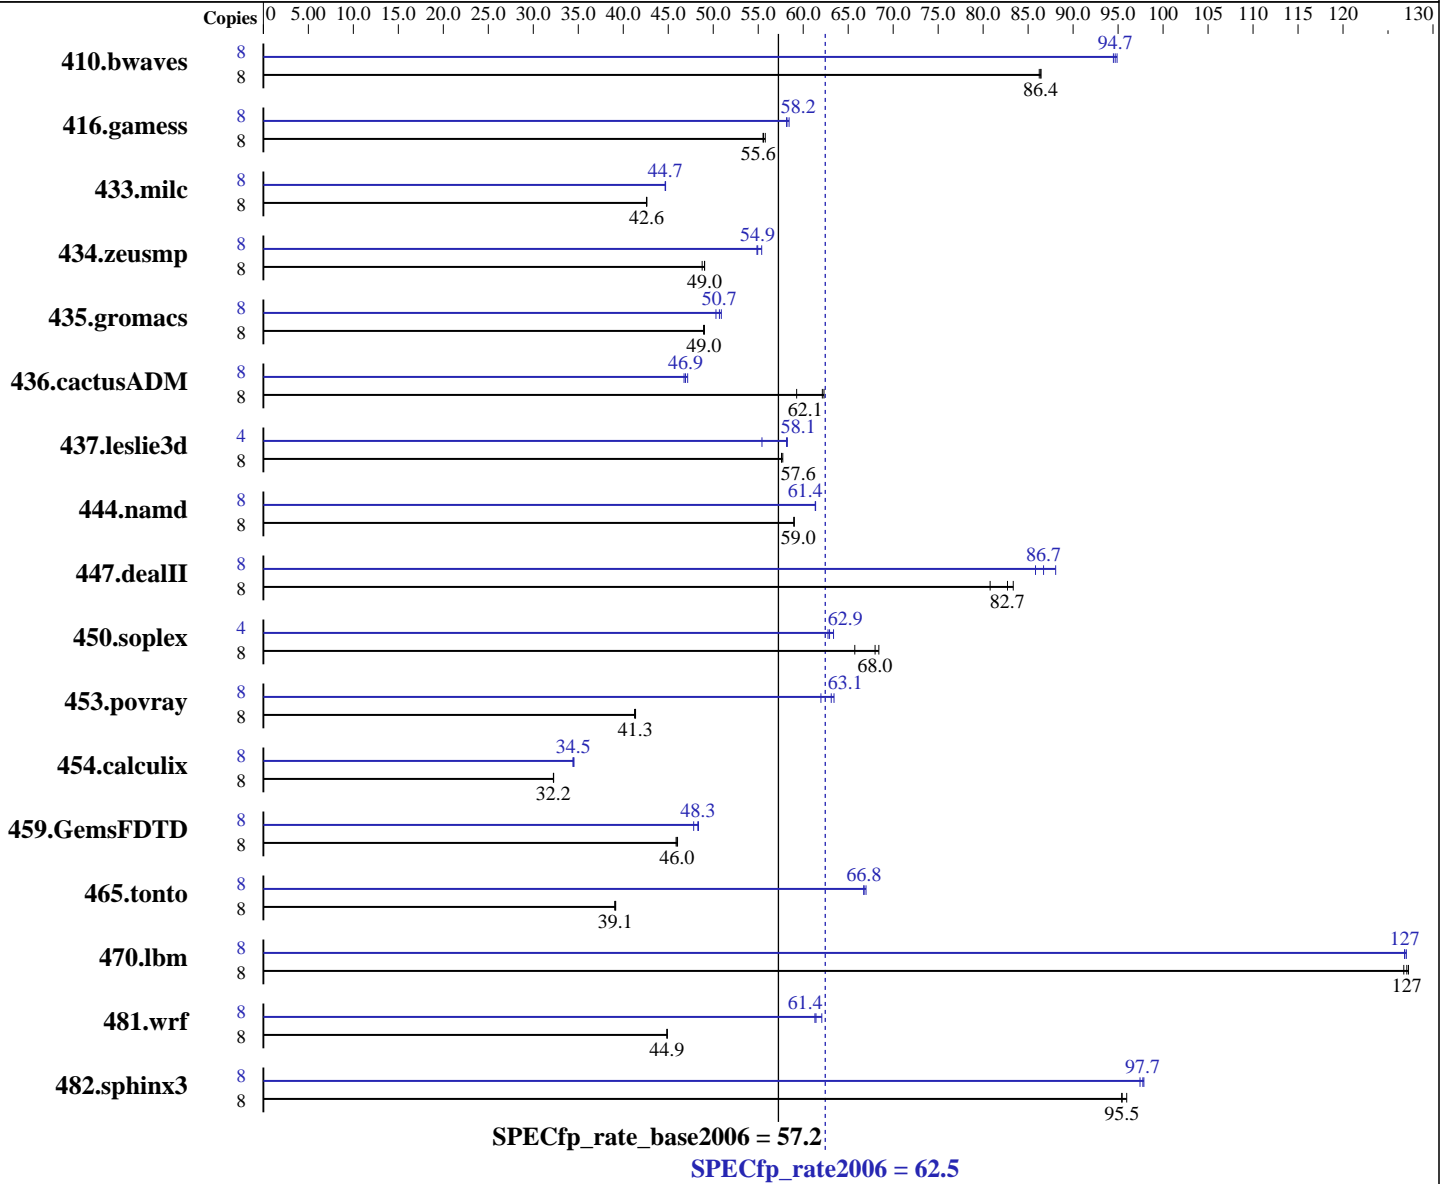

Hardware

CPU Name: POWER5+
 CPU Characteristics: 2100
 CPU MHz: Integrated
 FPU: 4 cores, 2 chips, 2 cores/chip, 2 threads/core
 CPU(s) enabled: 1, 2 chips
 CPU(s) orderable: 64 KB I + 32 KB D on chip per core
 Primary Cache: 1920 KB I+D on chip per chip
 Secondary Cache:

Continued on next page

Software

Operating System: AIX 5L V5.3
 Compiler: XL C/C++ Enterprise Edition Version 8.0 for AIX with the December 2006 PTF
 XL Fortran Enterprise Edition Version 10.1 for AIX with the November 2006 PTF
 Auto Parallel: No
 File System: AIX/JFS2
 System State: Multi-user
 Base Pointers: 32-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = **62.5**

Bull Escala PL450R+ (2100 MHz, 4 CPU)

SPECfp_rate_base2006 = **57.2**

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jan-2007

Hardware Availability: Feb-2006

Software Availability: Dec-2006

L3 Cache: 36 MB I+D off chip per chip
Other Cache: None
Memory: 32 GB (8x4 GB)
Disk Subsystem: 2x73 GB SCSI, 15K RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: ESSL 4.2.0.4

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1261	86.2	<u>1258</u>	<u>86.4</u>	1258	86.4	8	<u>1148</u>	<u>94.7</u>	1146	94.9	1151	94.5
416.gamess	8	2808	55.8	2820	55.5	<u>2818</u>	<u>55.6</u>	8	2693	58.2	<u>2692</u>	<u>58.2</u>	2681	58.4
433.milc	8	<u>1724</u>	<u>42.6</u>	1723	42.6	1725	42.6	8	1643	44.7	<u>1643</u>	<u>44.7</u>	1645	44.7
434.zeusmp	8	<u>1485</u>	<u>49.0</u>	1484	49.0	1493	48.8	8	1314	55.4	1327	54.9	<u>1325</u>	<u>54.9</u>
435.gromacs	8	<u>1166</u>	<u>49.0</u>	1165	49.0	1167	48.9	8	1122	50.9	<u>1127</u>	<u>50.7</u>	1135	50.3
436.cactusADM	8	1534	62.3	1613	59.3	<u>1539</u>	<u>62.1</u>	8	2027	47.2	2045	46.8	<u>2038</u>	<u>46.9</u>
437.leslie3d	8	<u>1306</u>	<u>57.6</u>	1303	57.7	1306	57.6	4	646	58.2	679	55.4	<u>647</u>	<u>58.1</u>
444.namd	8	<u>1088</u>	<u>59.0</u>	1088	59.0	1088	59.0	8	1045	61.4	<u>1046</u>	<u>61.4</u>	1046	61.3
447.dealII	8	1098	83.3	1133	80.8	<u>1107</u>	<u>82.7</u>	8	1066	85.8	<u>1055</u>	<u>86.7</u>	1039	88.1
450.soplex	8	<u>981</u>	<u>68.0</u>	1015	65.7	975	68.4	4	<u>530</u>	<u>62.9</u>	532	62.8	526	63.4
453.povray	8	<u>1029</u>	<u>41.3</u>	1032	41.3	1029	41.4	8	687	62.0	<u>674</u>	<u>63.1</u>	671	63.4
454.calculix	8	<u>2047</u>	<u>32.2</u>	2046	32.3	2047	32.2	8	1912	34.5	<u>1915</u>	<u>34.5</u>	1918	34.4
459.GemsFDTD	8	1844	46.0	1850	45.9	<u>1847</u>	<u>46.0</u>	8	1755	48.4	1775	47.8	<u>1758</u>	<u>48.3</u>
465.tonto	8	<u>2012</u>	<u>39.1</u>	2010	39.2	2016	39.0	8	1180	66.7	<u>1179</u>	<u>66.8</u>	1175	67.0
470.lbm	8	864	127	867	127	<u>865</u>	<u>127</u>	8	865	127	<u>866</u>	<u>127</u>	867	127
481.wrf	8	<u>1991</u>	<u>44.9</u>	1992	44.9	1991	44.9	8	1440	62.1	1458	61.3	<u>1455</u>	<u>61.4</u>
482.sphinx3	8	<u>1634</u>	<u>95.5</u>	1625	96.0	1634	95.4	8	1600	97.4	<u>1595</u>	<u>97.7</u>	1593	97.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

ulimits set to unlimited

bindprocessor command used on submit to bind each copy to a unique processor.

Large page mode was set as follows:

```
vmo -r -o lgpg_regions=900 -o lgpg_size=16777216
```

SMT was enabled using the AIX commands

```
smtctl -m on -w boot
```

```
bosboot -aD
```

```
shutdown -rF
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 62.5

Bull Escala PL450R+ (2100 MHz, 4 CPU)

SPECfp_rate_base2006 = 57.2

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jan-2007

Hardware Availability: Feb-2006

Software Availability: Dec-2006

Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc

C++ benchmarks:

/usr/vacpp/bin/xlC

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc /usr/bin/xlf95

Base Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
482.sphinx3: -qchars=signed

Base Optimization Flags

C benchmarks:

-qlanglvl=extc99 -O5 -qlargepage -D_ILS_MACROS -qipa=noobject
-blpdata -qipa=threads

C++ benchmarks:

-O5 -qlargepage -D_ILS_MACROS -qrtti=all -qipa=noobject -blpdata
-qipa=threads

Fortran benchmarks:

-O5 -qlargepage -qsmallstack=dynlenonheap -qipa=noobject -blpdata
-qipa=threads

Benchmarks using both Fortran and C:

-qlanglvl=extc99 -O5 -qlargepage -D_ILS_MACROS
-qsmallstack=dynlenonheap -qipa=noobject -blpdata -qipa=threads



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 62.5

Bull Escala PL450R+ (2100 MHz, 4 CPU)

SPECfp_rate_base2006 = 57.2

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jan-2007

Hardware Availability: Feb-2006

Software Availability: Dec-2006

Base Other Flags

C benchmarks:

-bmaxdata:0x40000000 -qsuppress=1500-036

C++ benchmarks:

-bmaxdata:0x50000000 -qsuppress=1500-036

Fortran benchmarks:

-bmaxdata:0x50000000 -qalias=nostd -qalias_size=200000000

-qsuppress=cmpmsg:1500-010 -qsuppress=1500-036

Benchmarks using both Fortran and C:

-bmaxdata:0x50000000 -qalias=nostd -qalias_size=200000000

-qsuppress=cmpmsg:1500-010 -qsuppress=1500-036

Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc

C++ benchmarks:

/usr/vacpp/bin/xlc

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc /usr/bin/xlf95

Peak Portability Flags

410.bwaves: -qfixed

416.gamess: -qfixed

434.zeusmp: -qfixed

435.gromacs: -qfixed -qextname

436.cactusADM: -qfixed -qextname

437.leslie3d: -qfixed

454.calculix: -qfixed -qextname

481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE

482.sphinx3: -qchars=signed

Peak Optimization Flags

C benchmarks:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 62.5

Bull Escala PL450R+ (2100 MHz, 4 CPU)

SPECfp_rate_base2006 = 57.2

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jan-2007

Hardware Availability: Feb-2006

Software Availability: Dec-2006

Peak Optimization Flags (Continued)

433.milc: -qlanglvl=extc99 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -D_ILS_MACROS -qalign=natural -qipa=noobject
-blpdata -qipa=threads

470.lbm: -qlanglvl=extc99 -O5 -qlargepage -D_ILS_MACROS
-qipa=noobject -blpdata -qipa=threads

482.sphinx3: -qlanglvl=extc99 -qpdf1(pass 1) -qpdf2(pass 2) -O4
-qlargepage -D_ILS_MACROS -qipa=noobject -blpdata
-qipa=threads

C++ benchmarks:

444.namd: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage
-D_ILS_MACROS -qipa=noobject -blpdata -qipa=threads

447.dealII: -O5 -qlargepage -D_ILS_MACROS -qrtti=all
-D__IBM_FAST_VECTOR -qipa=noobject -blpdata -qipa=threads

450.soplex: -O4 -qlargepage -D_ILS_MACROS -qipa=noobject -blpdata
-qipa=threads

453.povray: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage
-D_ILS_MACROS -q64 -qalign=natural -lmass -qipa=noobject
-blpdata -qipa=threads

Fortran benchmarks:

410.bwaves: -O5 -qlargepage -qsmallstack=dynlenonheap -qipa=noobject
-blpdata -qipa=threads

416.gamess: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qessl
-lessl -qipa=noobject -blpdata -qipa=threads

434.zeusmp: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage
-qipa=noobject -blpdata -qipa=threads

437.leslie3d: -O5 -qlargepage -qipa=noobject -blpdata -qipa=threads

459.GemsFDTD: Same as 437.leslie3d

465.tonto: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -lmass
-qipa=noobject -blpdata -qipa=threads

Benchmarks using both Fortran and C:

435.gromacs: -qlanglvl=extc99 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -D_ILS_MACROS -qipa=noobject -blpdata
-qipa=threads

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 62.5

Bull Escala PL450R+ (2100 MHz, 4 CPU)

SPECfp_rate_base2006 = 57.2

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jan-2007

Hardware Availability: Feb-2006

Software Availability: Dec-2006

Peak Optimization Flags (Continued)

436.cactusADM: -qlanglvl=extc99 -O5 -qlargepage -D_ILS_MACROS
-qipa=noobject -blpdata -qipa=threads

454.calculix: Same as 435.gromacs

481.wrf: -qlanglvl=extc99 -O5 -qlargepage -lmass
-qsmallstack=dynlenonheap -D_ILS_MACROS -qipa=noobject
-blpdata -qipa=threads

Peak Other Flags

C benchmarks:

433.milc: -bmaxdata:0x40000000 -qsuppress=1500-036

470.lbm: -bmaxdata:0x30000000 -qsuppress=1500-036

482.sphinx3: -qfdpr -qsuppress=1500-036

C++ benchmarks:

444.namd: -qfdpr -qsuppress=1500-036

447.dealII: -bmaxdata:0x50000000 -qsuppress=1500-036

450.soplex: -bmaxdata:0x40000000 -qfdpr -qsuppress=1500-036

453.povray: -qsuppress=1500-036

Fortran benchmarks (except as noted below):

-bmaxdata:0x50000000 -qsuppress=cmpmsg:1500-010 -qsuppress=1500-036

416.gamess: -bmaxdata:0x40000000 -qalias=nostd
-qsuppress=cmpmsg:1500-010 -qsuppress=1500-036

434.zeusmp: -bmaxdata:0x40000000 -qfdpr -qsuppress=cmpmsg:1500-010
-qsuppress=1500-036

437.leslie3d: -qsuppress=cmpmsg:1500-010 -qsuppress=1500-036

465.tonto: -bmaxdata:0x20000000 -qalias=nostd
-qsuppress=cmpmsg:1500-010 -qsuppress=1500-036

Benchmarks using both Fortran and C (except as noted below):

-qsuppress=cmpmsg:1500-010 -qsuppress=1500-036

436.cactusADM: -bmaxdata:0x50000000 -qsuppress=cmpmsg:1500-010
-qsuppress=1500-036

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 62.5

Bull Escala PL450R+ (2100 MHz, 4 CPU)

SPECfp_rate_base2006 = 57.2

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jan-2007
Hardware Availability: Feb-2006
Software Availability: Dec-2006

Peak Other Flags (Continued)

481.wrf: -bmaxdata:0x30000000 -qsuppress=cmpmsg:1500-010
-qsuppress=1500-036

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.15.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.15.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:51:32 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 February 2007.