



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DG965WH motherboard
(3.60 GHz, Intel Pentium D processor 960)

SPECfp®_rate2006 = Not Run

SPECfp_rate_base2006 = 20.4

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jan-2007

Hardware Availability: Aug-2006

Software Availability: Aug-2006

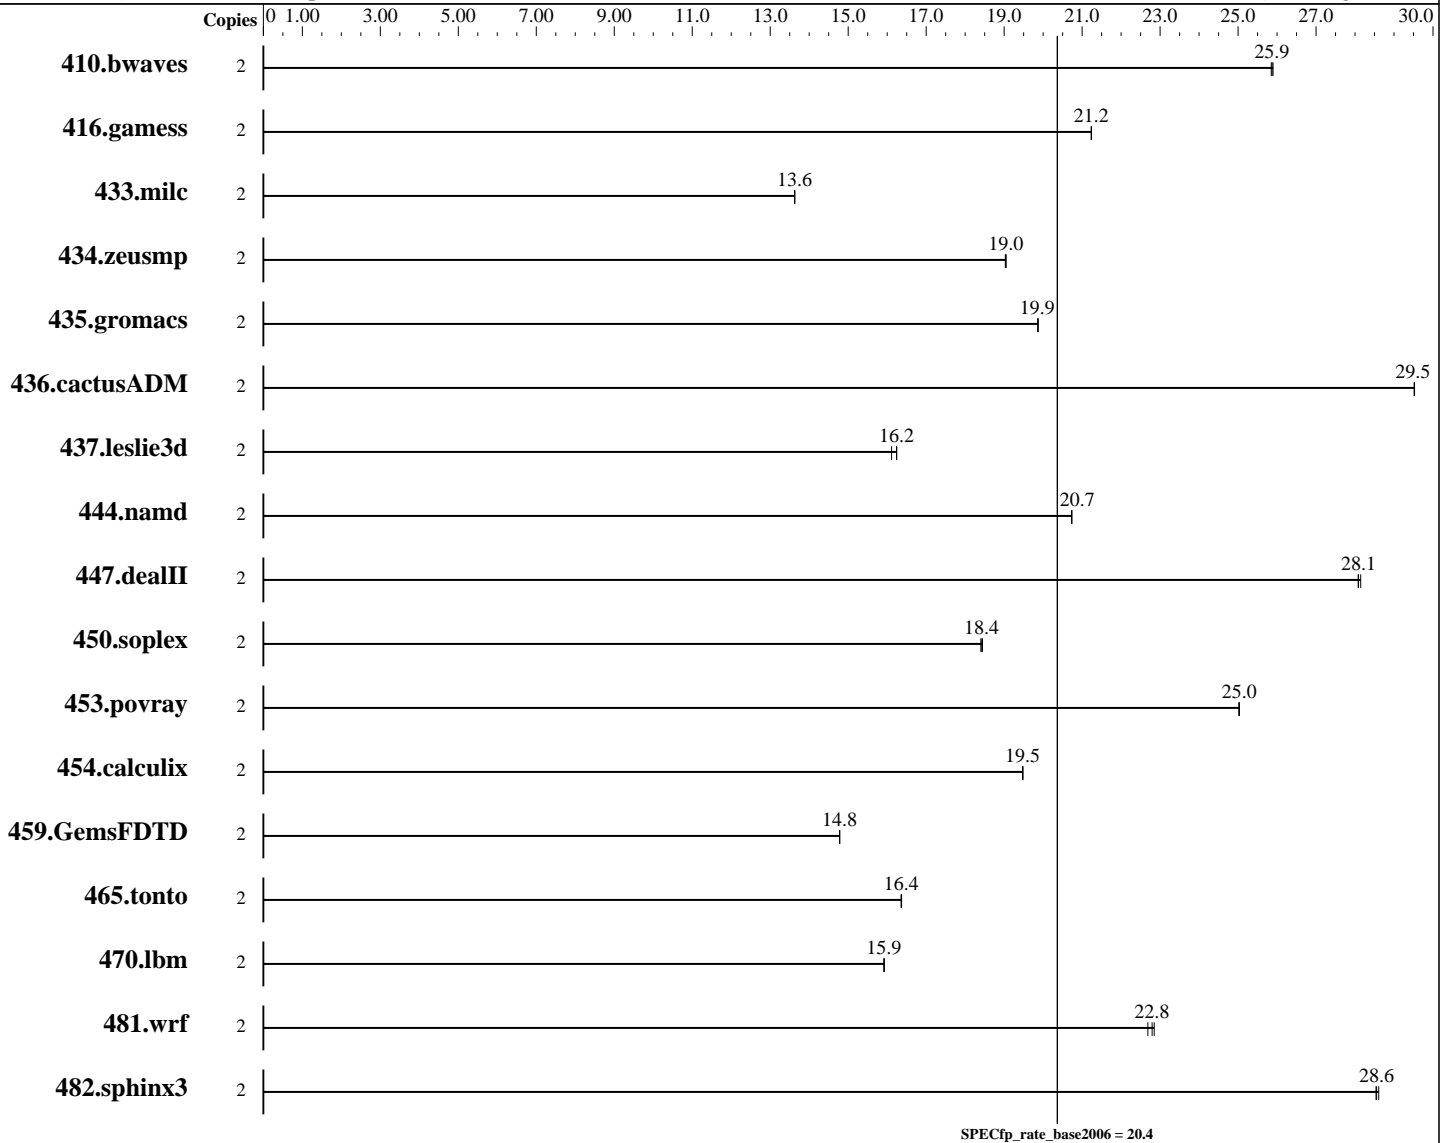

Hardware

CPU Name: Intel Pentium D 960
 CPU Characteristics: 3.60 GHz, 800 MHz bus
 CPU MHz: 3600
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 12 K micro-ops I + 16 KB D on chip per core
 Secondary Cache: 2 MB I+D on chip per core

Continued on next page

Software

Operating System: Windows XP Professional w/ SP2
 Compiler: Intel C++ and Fortran Compiler for IA32 version 9.1
 Build no 20060816
 Microsoft Visual Studio .Net 2003 (for libraries)
 Auto Parallel: No
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DG965WH motherboard
(3.60 GHz, Intel Pentium D processor 960)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 20.4

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jan-2007

Hardware Availability: Aug-2006

Software Availability: Aug-2006

L3 Cache: None
Other Cache: None
Memory: 2 GB (2 1GB Micron MT16HTF12864AY-80ED4 DDR2 800, CL5)
Disk Subsystem: Maxtor DiamondMax 10 6B300S0 300GB NCQ Serial ATA (7200 RPM, 16MB cache)
Other Hardware: SoundBlaster Live! PCI card

Peak Pointers: Not Applicable
Other Software: SmartHeap Library Version 8.0 from <http://www.microquill.com/>

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	1051	25.9	<u>1051</u>	<u>25.9</u>	1050	25.9							
416.gamess	2	1844	21.2	1844	21.2	<u>1844</u>	<u>21.2</u>							
433.milc	2	<u>1348</u>	<u>13.6</u>	1348	13.6	1347	13.6							
434.zeusmp	2	956	19.0	<u>956</u>	<u>19.0</u>	956	19.0							
435.gromacs	2	719	19.9	719	19.9	<u>719</u>	<u>19.9</u>							
436.cactusADM	2	810	29.5	809	29.5	<u>809</u>	<u>29.5</u>							
437.leslie3d	2	1157	16.2	1167	16.1	<u>1157</u>	<u>16.2</u>							
444.namd	2	<u>774</u>	<u>20.7</u>	773	20.7	774	20.7							
447.dealII	2	813	28.1	815	28.1	<u>815</u>	<u>28.1</u>							
450.soplex	2	904	18.4	906	18.4	<u>905</u>	<u>18.4</u>							
453.povray	2	425	25.0	425	25.0	<u>425</u>	<u>25.0</u>							
454.calculix	2	847	19.5	847	19.5	<u>847</u>	<u>19.5</u>							
459.GemsFDTD	2	1436	14.8	1435	14.8	<u>1436</u>	<u>14.8</u>							
465.tonto	2	1202	16.4	<u>1203</u>	<u>16.4</u>	1203	16.4							
470.lbm	2	1726	15.9	<u>1726</u>	<u>15.9</u>	1726	15.9							
481.wrf	2	978	22.8	985	22.7	<u>980</u>	<u>22.8</u>							
482.sphinx3	2	1366	28.5	<u>1365</u>	<u>28.6</u>	1363	28.6							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Tested systems can be used with Shin-G ATX case, Antec NeoPower 480W power supply
Product description located as of 1/2007:

<http://www.intel.com/products/motherboard/DG965WH/index.htm>

The system bus runs at 800 MHz

System was configured with Single nVidia Quad SLI Geforce 7950 GX2

Base Compiler Invocation

C benchmarks:

icl -Qvc7.1 -Qc99

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DG965WH motherboard
(3.60 GHz, Intel Pentium D processor 960)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 20.4

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jan-2007

Hardware Availability: Aug-2006

Software Availability: Aug-2006

Base Compiler Invocation (Continued)

C++ benchmarks:

icl -Qvc7.1

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc7.1 -Qc99 ifort

Base Portability Flags

436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
-DBOOST_NO_INTRINSIC_WCHAR_T
453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL

Base Optimization Flags

C benchmarks:

-fast /F950000000 shlw32m.lib -link /FORCE:MULTIPLE

C++ benchmarks:

-fast -Qcxx_features /F950000000 shlw32m.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:

-fast /F950000000 -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

-fast /F950000000 -link /FORCE:MULTIPLE

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic91-flags.20090715.06.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic91-flags.20090715.06.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DG965WH motherboard
(3.60 GHz, Intel Pentium D processor 960)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 20.4

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jan-2007

Hardware Availability: Aug-2006

Software Availability: Aug-2006

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:24:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 February 2007.