



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECint®\_rate2006 = 66.5

NovaScale B280 (Intel Xeon processor E5335,2.00GHz)

SPECint\_rate\_base2006 = 64.4

CPU2006 license: 20


Test date: Feb-2007

Test sponsor: Bull SAS

Hardware Availability: Jan-2007

Tested by: Bull SAS

Software Availability: Dec-2006

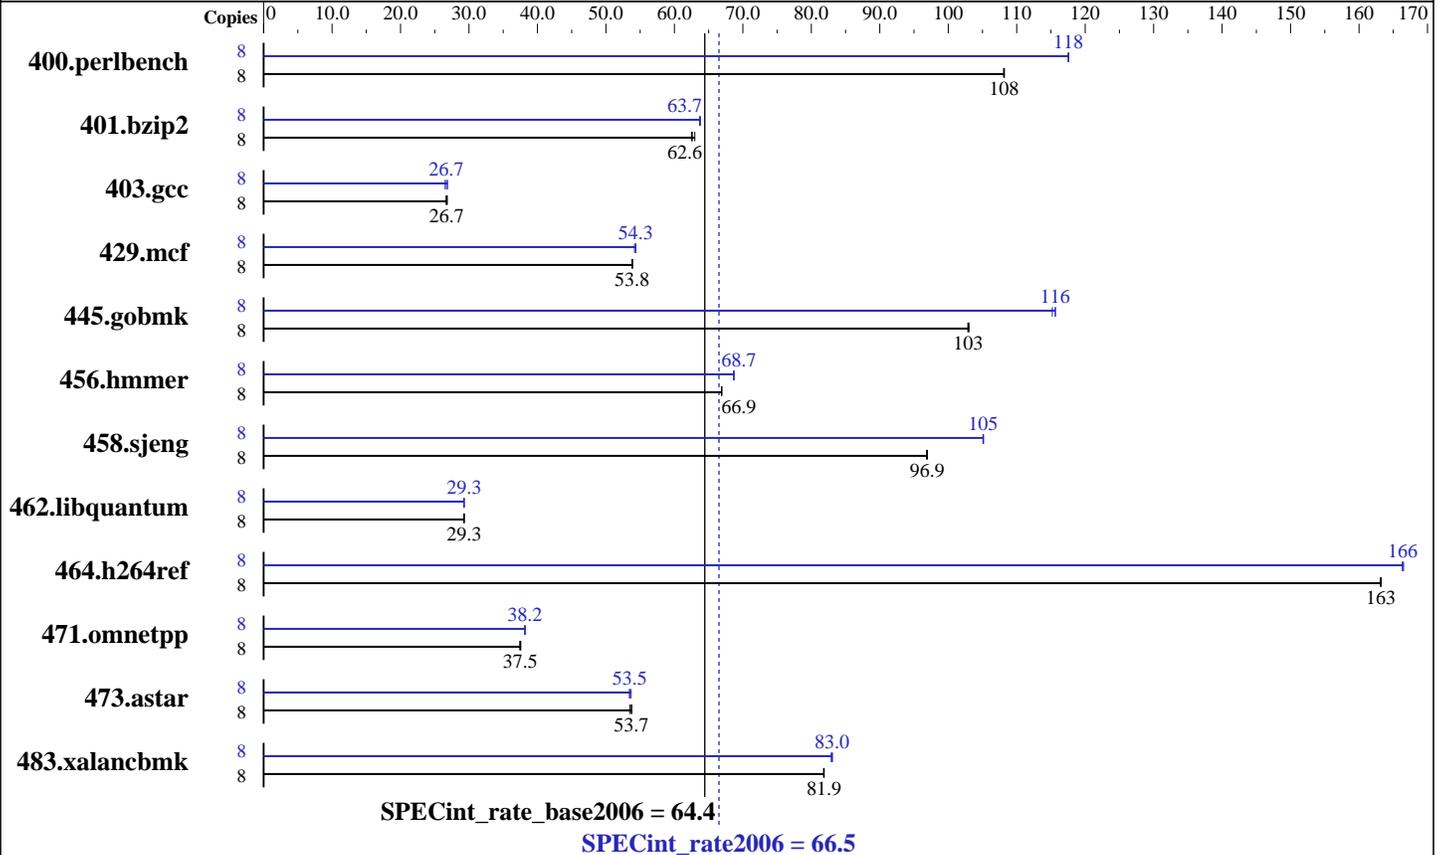

### Hardware

CPU Name: Intel Xeon E5335  
 CPU Characteristics: 2.00 GHz, 8MB L2, 1333MHz bus  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1 to 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 8 GB (1GB DIMMx8, FB-DIMM PC2-5300F ECC CL5)  
 Disk Subsystem: 73 GB SAS, 10000RPM  
 Other Hardware: None

### Software

Operating System: Windows Server 2003 Enterprise Edition (32 bits) Service Pack1  
 Compiler: Intel C++ Compiler for IA32 version 9.1  
 Package ID W\_CC\_C\_9.1.033 Build no 20061103Z  
 Microsoft Visual Studio .NET 2003 (lib & linker)  
 Auto Parallel: No  
 File System: NTFS  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: MicroQuill SmartHeap Library 8.0 (shIW32M.lib)



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale B280 (Intel Xeon processor E5335,2.00GHz)

SPECint\_rate2006 = 66.5

SPECint\_rate\_base2006 = 64.4

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Feb-2007  
Hardware Availability: Jan-2007  
Software Availability: Dec-2006

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	723	108	722	108	<u>723</u>	<u>108</u>	8	665	118	<u>665</u>	<u>118</u>	665	118
401.bzip2	8	1226	63.0	1235	62.5	<u>1233</u>	<u>62.6</u>	8	1212	63.7	<u>1212</u>	<u>63.7</u>	1210	63.8
403.gcc	8	2416	26.7	2400	26.8	<u>2409</u>	<u>26.7</u>	8	<u>2412</u>	<u>26.7</u>	2397	26.9	2429	26.5
429.mcf	8	1354	53.9	1355	53.8	<u>1355</u>	<u>53.8</u>	8	<u>1343</u>	<u>54.3</u>	1347	54.2	1342	54.3
445.gobmk	8	814	103	816	103	<u>815</u>	<u>103</u>	8	726	116	729	115	<u>726</u>	<u>116</u>
456.hammer	8	1116	66.9	1115	66.9	<u>1116</u>	<u>66.9</u>	8	1086	68.7	1087	68.6	<u>1087</u>	<u>68.7</u>
458.sjeng	8	1000	96.8	<u>999</u>	<u>96.9</u>	999	96.9	8	920	105	<u>921</u>	<u>105</u>	921	105
462.libquantum	8	5657	29.3	5665	29.3	<u>5660</u>	<u>29.3</u>	8	<u>5658</u>	<u>29.3</u>	5658	29.3	5667	29.2
464.h264ref	8	<u>1085</u>	<u>163</u>	1084	163	1086	163	8	1064	166	1063	166	<u>1064</u>	<u>166</u>
471.omnetpp	8	<u>1333</u>	<u>37.5</u>	1336	37.4	1331	37.6	8	1311	38.1	<u>1309</u>	<u>38.2</u>	1309	38.2
473.astar	8	1044	53.8	<u>1046</u>	<u>53.7</u>	1050	53.5	8	<u>1050</u>	<u>53.5</u>	1046	53.7	1051	53.4
483.xalancbmk	8	675	81.8	<u>674</u>	<u>81.9</u>	674	81.9	8	666	82.9	665	83.1	<u>665</u>	<u>83.0</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Base Compiler Invocation

C benchmarks:  
icl -Qvc7.1 -Qc99  
C++ benchmarks:  
icl -Qvc7.1

## Base Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32

## Base Optimization Flags

C benchmarks:  
-fast /F512000000 shlw32m.lib -link /FORCE:MULTIPLE  
C++ benchmarks:  
-fast -Qcxx\_features /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale B280 (Intel Xeon processor E5335,2.00GHz)

SPECint\_rate2006 = 66.5

SPECint\_rate\_base2006 = 64.4

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Feb-2007  
Hardware Availability: Jan-2007  
Software Availability: Dec-2006

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks:

icl -Qvc7.1 -Qc99

C++ benchmarks:

icl -Qvc7.1

## Peak Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32

## Peak Optimization Flags

C benchmarks:

-Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE

C++ benchmarks:

-Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qcxx\_features  
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/flags.20090714.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/flags.20090714.00.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale B280 (Intel Xeon processor E5335,2.00GHz)

SPECint\_rate2006 = 66.5

SPECint\_rate\_base2006 = 64.4

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Bull SAS

**Test date:** Feb-2007

**Hardware Availability:** Jan-2007

**Software Availability:** Dec-2006

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 10:39:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 6 March 2007.