



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®_rate2006 = Not Run

PowerEdge 2970 (AMD Opteron 2210, 1.80GHz)

SPECfp_rate_base2006 = 33.7

CPU2006 license: 55


Test date: Mar-2007

Test sponsor: Dell Inc.

Hardware Availability: Apr-2007

Tested by: Dell Inc.

Software Availability: Aug-2006

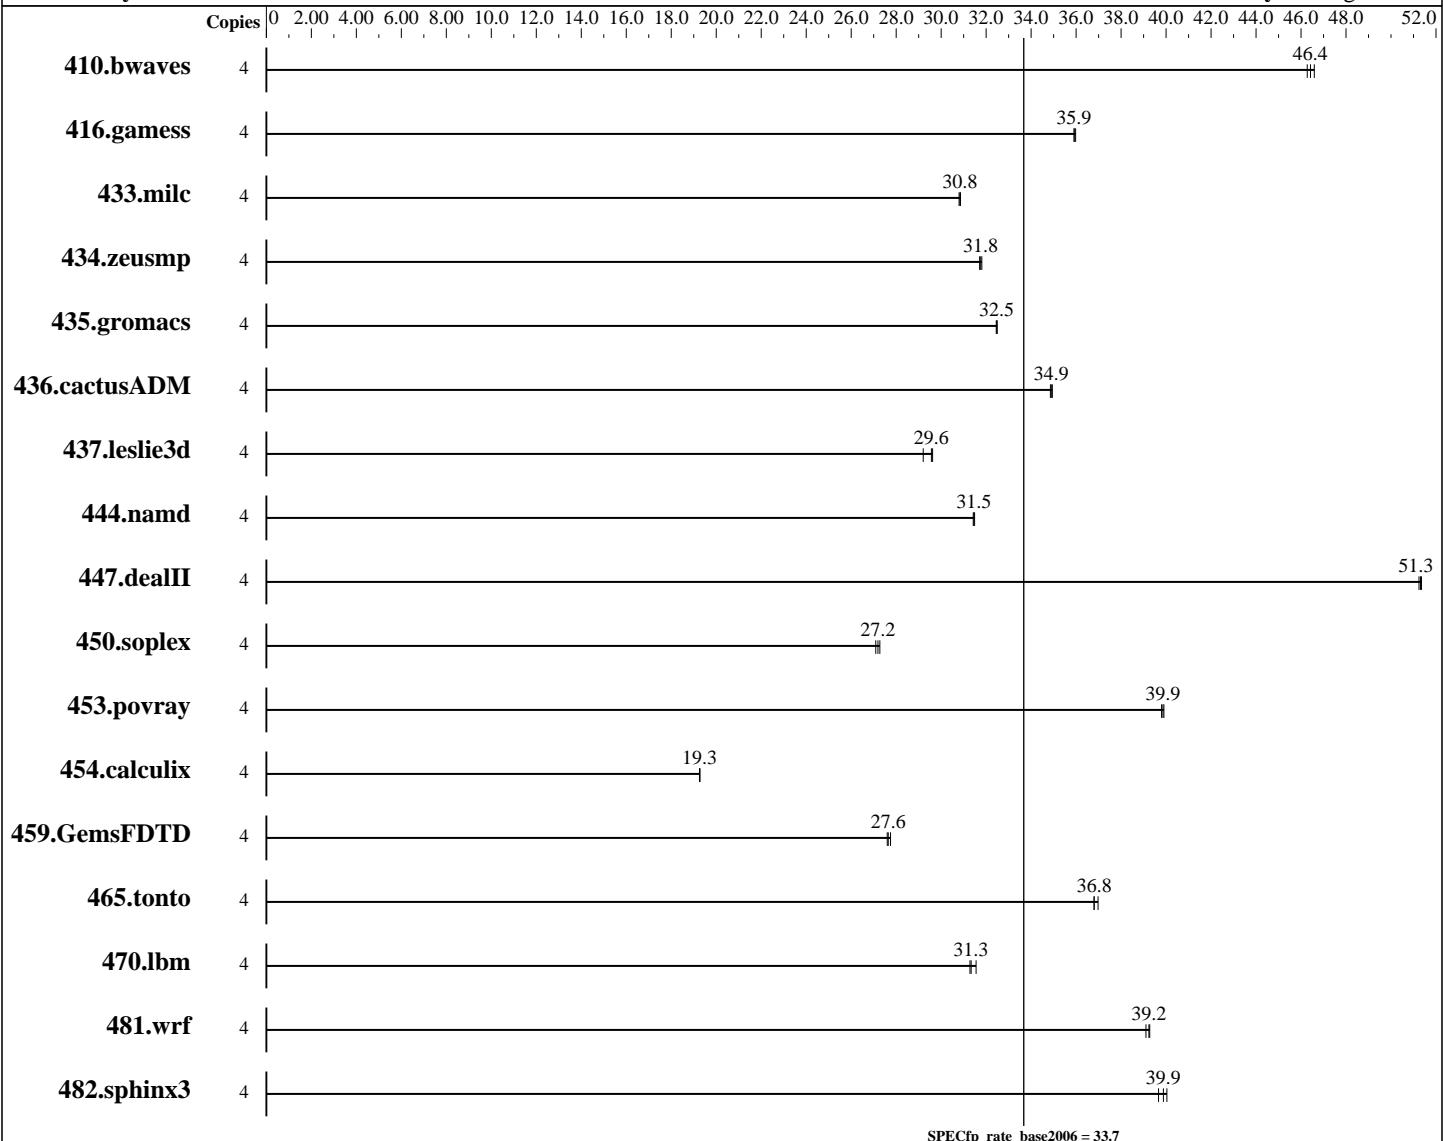

Hardware

CPU Name: AMD Opteron 2210
 CPU Characteristics:
 CPU MHz: 1800
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core

Software

Operating System: SuSE Linux Enterprise Server 10 64-bit kernel
 Compiler: QLogic PathScale Compiler Suite, Release 2.5
 Auto Parallel: No
 File System: ReiserFS
 System State: Multi-user, run level 3
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = Not Run

PowerEdge 2970 (AMD Opteron 2210, 1.80GHz)

SPECfp_rate_base2006 = 33.7

CPU2006 license: 55

Test date: Mar-2007

Test sponsor: Dell Inc.

Hardware Availability: Apr-2007

Tested by: Dell Inc.

Software Availability: Aug-2006

L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8x2GB, DDR2-667 CL5 ECC Dual Rank)
 Disk Subsystem: SAS, 73 GB
 Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1167	46.6	<u>1171</u>	46.4	1175	46.3							
416.gamess	4	2181	35.9	<u>2181</u>	35.9	2177	36.0							
433.milc	4	<u>1191</u>	30.8	1190	30.9	1192	30.8							
434.zeusmp	4	1144	31.8	1148	31.7	<u>1146</u>	31.8							
435.gromacs	4	880	32.4	<u>879</u>	32.5	879	32.5							
436.cactusADM	4	1368	34.9	1371	34.9	<u>1370</u>	34.9							
437.leslie3d	4	1269	29.6	<u>1272</u>	29.6	1288	29.2							
444.namd	4	1021	31.4	<u>1020</u>	31.5	1019	31.5							
447.dealII	4	891	51.4	<u>892</u>	51.3	893	51.2							
450.soplex	4	1223	27.3	<u>1227</u>	27.2	1231	27.1							
453.povray	4	535	39.8	533	39.9	<u>534</u>	39.9							
454.calculix	4	<u>1713</u>	19.3	1712	19.3	1714	19.3							
459.GemsFDTD	4	1538	27.6	<u>1535</u>	27.6	1529	27.7							
465.tonto	4	1064	37.0	<u>1069</u>	36.8	1070	36.8							
470.lbm	4	1757	31.3	1742	31.6	<u>1754</u>	31.3							
481.wrf	4	1138	39.3	<u>1139</u>	39.2	1143	39.1							
482.sphinx3	4	1947	40.0	<u>1955</u>	39.9	1965	39.7							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Taskset utility used to bind CPU(s) to processes
 Binaries were built on SuSE Linux Enterprise Server 9 SP3 64-bit

Base Compiler Invocation

C benchmarks:
 pathcc

C++ benchmarks:
 pathCC

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = Not Run

PowerEdge 2970 (AMD Opteron 2210, 1.80GHz)

SPECfp_rate_base2006 = 33.7

CPU2006 license: 55

Test date: Mar-2007

Test sponsor: Dell Inc.

Hardware Availability: Apr-2007

Tested by: Dell Inc.

Software Availability: Aug-2006

Base Compiler Invocation (Continued)

Fortran benchmarks:

pathf95

Benchmarks using both Fortran and C:

pathcc pathf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64 -DSPEC_CPU_TABLE_WORKAROUND
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-Ofast

C++ benchmarks:

-Ofast

Fortran benchmarks:

-Ofast

Benchmarks using both Fortran and C:

-Ofast

Base Other Flags

C benchmarks:

-IPA:max_jobs=2

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = Not Run

PowerEdge 2970 (AMD Opteron 2210, 1.80GHz)

SPECfp_rate_base2006 = 33.7

CPU2006 license: 55

Test date: Mar-2007

Test sponsor: Dell Inc.

Hardware Availability: Apr-2007

Tested by: Dell Inc.

Software Availability: Aug-2006

Base Other Flags (Continued)

C++ benchmarks:

-IPA:max_jobs=2

Fortran benchmarks:

-IPA:max_jobs=2

Benchmarks using both Fortran and C:

-IPA:max_jobs=2

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.25.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.25.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Sep 13 11:17:42 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 April 2007.