



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp<sup>®</sup>\_rate2006 = 49.6

NovaScale R480 (3.20 GHz, Intel Xeon 7130M)

SPECfp\_rate\_base2006 = 48.7

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2007

Hardware Availability: Sep-2006

Software Availability: Nov-2006

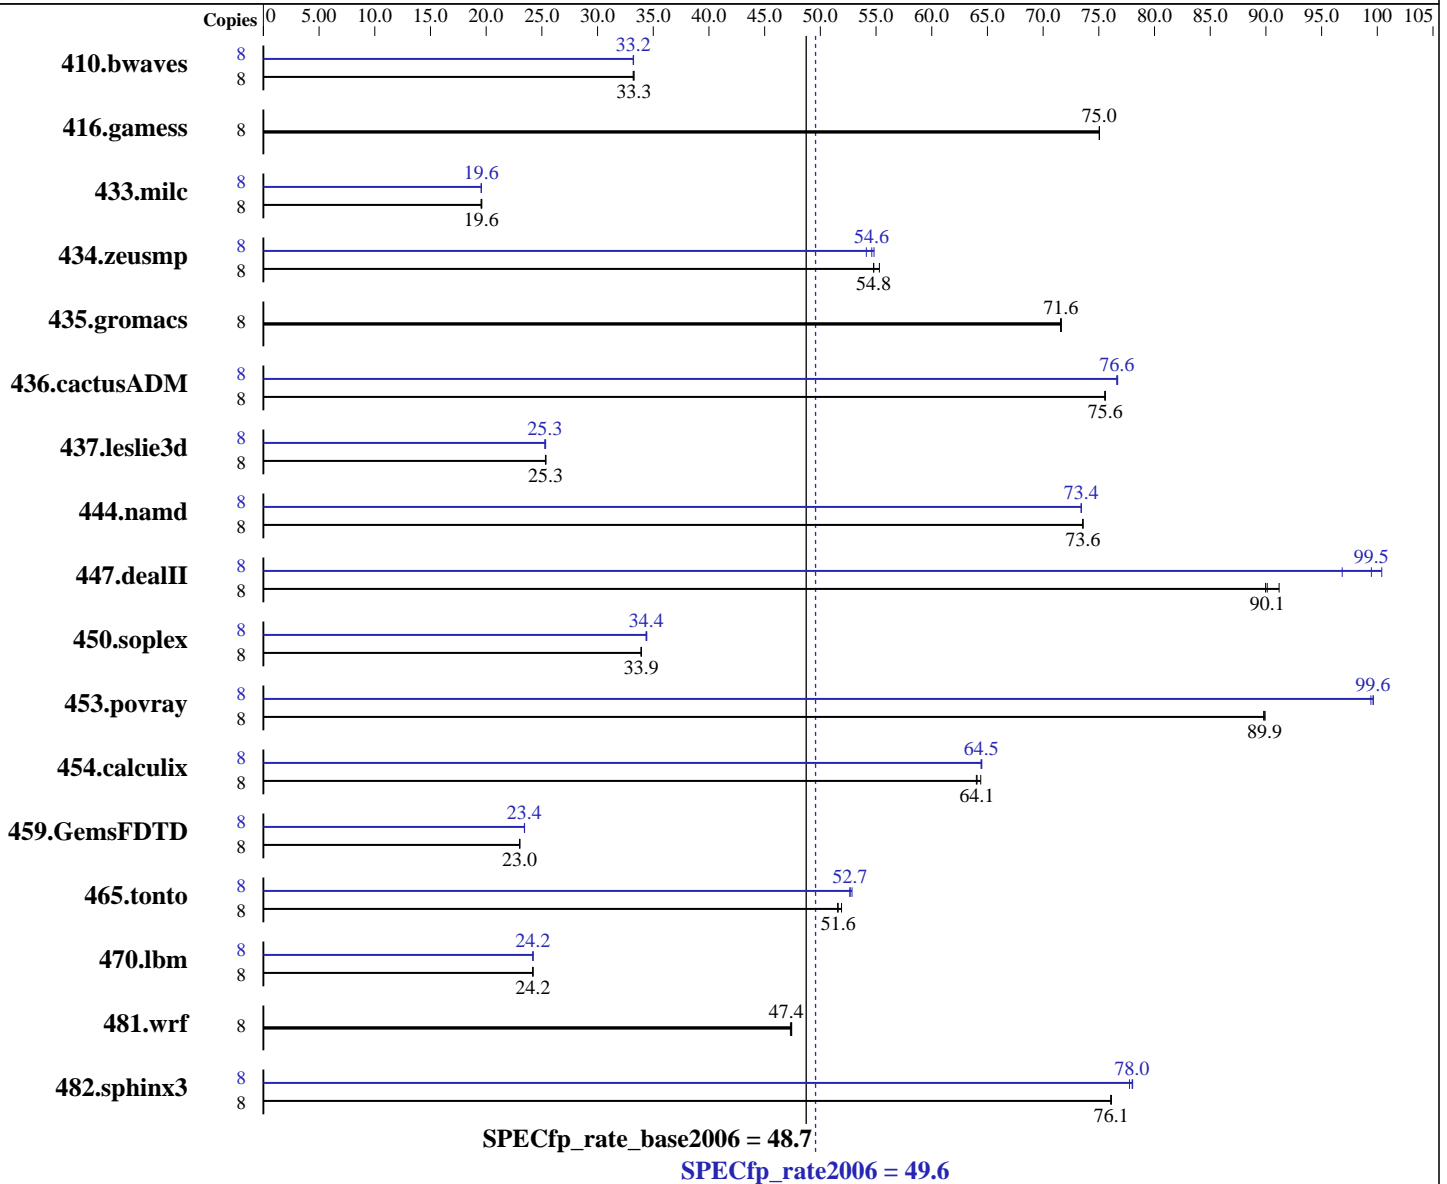

### Hardware

CPU Name: Intel Xeon 7130M  
 CPU Characteristics: 3.2GHz, 800MHz bus  
 CPU MHz: 3200  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 4 chips, 2 cores/chip  
 CPU(s) orderable: 1,2,4 chips  
 Primary Cache: 12 K micro-ops I + 16 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

### Software

Operating System: Windows Server 2003 Enterprise X64 Edition  
 Compiler: Intel C++ Compiler 9.1 for 32-bit  
 Build 20061103Z Package ID: W\_CC\_C\_9.1.033  
 Intel Fortran Compiler 9.1 for 32-bit  
 Build 20061103Z Package ID: W\_FC\_C\_9.1.033  
 Microsoft Visual Studio .NET 2003 (libraries)  
 Auto Parallel: No  
 File System: NTFS  
 System State: Default

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp\_rate2006 = 49.6

NovaScale R480 (3.20 GHz, Intel Xeon 7130M)

SPECfp\_rate\_base2006 = 48.7

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2007

Hardware Availability: Sep-2006

Software Availability: Nov-2006

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 32 GB (667 MHz ECC CL5 DDR2 FB-DIMM)  
Disk Subsystem: 2x36GB SAS 15000 rpm  
Other Hardware: None

Base Pointers: 32-bit  
Peak Pointers: 32-bit  
Other Software: MicroQuill SmartHeap Library 8.0 (shlW32M.lib)

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3268	33.3	3275	33.2	<u>3269</u>	<u>33.3</u>	8	3274	33.2	3272	33.2	<u>3273</u>	<u>33.2</u>
416.gamess	8	2087	75.0	<u>2087</u>	<u>75.0</u>	2087	75.1	8	2087	75.0	<u>2087</u>	<u>75.0</u>	2087	75.1
433.milc	8	3745	19.6	3756	19.6	<u>3754</u>	<u>19.6</u>	8	3753	19.6	3754	19.6	<u>3754</u>	<u>19.6</u>
434.zeusmp	8	1316	55.3	1329	54.8	<u>1329</u>	<u>54.8</u>	8	1328	54.8	<u>1333</u>	<u>54.6</u>	1345	54.1
435.gromacs	8	798	71.6	797	71.6	<u>798</u>	<u>71.6</u>	8	798	71.6	797	71.6	<u>798</u>	<u>71.6</u>
436.cactusADM	8	1265	75.6	<u>1265</u>	<u>75.6</u>	1266	75.5	8	<u>1247</u>	<u>76.6</u>	1248	76.6	1247	76.7
437.leslie3d	8	2970	25.3	2964	25.4	<u>2969</u>	<u>25.3</u>	8	2975	25.3	2967	25.3	<u>2974</u>	<u>25.3</u>
444.namd	8	872	73.6	<u>872</u>	<u>73.6</u>	872	73.6	8	874	73.4	<u>874</u>	<u>73.4</u>	874	73.4
447.dealII	8	<u>1016</u>	<u>90.1</u>	1004	91.2	1017	90.0	8	912	100	<u>920</u>	<u>99.5</u>	945	96.8
450.soplex	8	1966	33.9	1968	33.9	<u>1967</u>	<u>33.9</u>	8	1942	34.4	<u>1940</u>	<u>34.4</u>	1938	34.4
453.povray	8	473	89.9	<u>473</u>	<u>89.9</u>	474	89.8	8	427	99.6	428	99.4	<u>427</u>	<u>99.6</u>
454.calculix	8	<u>1030</u>	<u>64.1</u>	1031	64.0	1025	64.4	8	<u>1024</u>	<u>64.5</u>	1024	64.4	1023	64.5
459.GemsFDTD	8	3687	23.0	3690	23.0	<u>3689</u>	<u>23.0</u>	8	3619	23.5	3622	23.4	<u>3622</u>	<u>23.4</u>
465.tonto	8	1517	51.9	1527	51.5	<u>1526</u>	<u>51.6</u>	8	<u>1494</u>	<u>52.7</u>	1495	52.6	1490	52.8
470.lbm	8	4542	24.2	<u>4542</u>	<u>24.2</u>	4545	24.2	8	<u>4541</u>	<u>24.2</u>	4540	24.2	4544	24.2
481.wrf	8	1884	47.4	1889	47.3	<u>1885</u>	<u>47.4</u>	8	1884	47.4	1889	47.3	<u>1885</u>	<u>47.4</u>
482.sphinx3	8	<u>2048</u>	<u>76.1</u>	2048	76.1	2050	76.1	8	1998	78.0	<u>1999</u>	<u>78.0</u>	2005	77.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

### Other Configuration Notes

The NovaScale T880 and the NovaScale R480 models are electronically equivalent.  
The results have been measured on a NovaScale R480 model.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECfp\_rate2006 = 49.6**

NovaScale R480 (3.20 GHz, Intel Xeon 7130M)

**SPECfp\_rate\_base2006 = 48.7**

**CPU2006 license:** 20  
**Test sponsor:** Bull SAS  
**Tested by:** Bull SAS

**Test date:** Mar-2007  
**Hardware Availability:** Sep-2006  
**Software Availability:** Nov-2006

## Base Compiler Invocation

C benchmarks:  
icl -Qvc7.1 -Qc99

C++ benchmarks:  
icl -Qvc7.1

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icl -Qvc7.1 -Qc99 ifort

## Base Portability Flags

436.cactusADM: -Qlowercase /assume:underscore  
444.namd: -TP  
447.dealII: -DDEAL\_II\_MEMBER\_VAR\_SPECIALIZATION\_BUG  
-DBOOST\_NO\_INTRINSIC\_WCHAR\_T  
453.povray: -DSPEC\_CPU\_WINDOWS\_ICL  
454.calculix: -DSPEC\_CPU\_NOZMODIFIER -Qlowercase  
481.wrf: -DSPEC\_CPU\_WINDOWS\_ICL

## Base Optimization Flags

C benchmarks:  
-fast /F950000000 shlw32m.lib -link /FORCE:MULTIPLE

C++ benchmarks:  
-fast -Qcxx\_features /F950000000 shlw32m.lib  
-link /FORCE:MULTIPLE

Fortran benchmarks:  
-fast /F950000000 -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:  
-fast /F950000000 -link /FORCE:MULTIPLE

## Peak Compiler Invocation

C benchmarks:  
icl -Qvc7.1 -Qc99

C++ benchmarks:  
icl -Qvc7.1

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECfp\_rate2006 = 49.6**

NovaScale R480 (3.20 GHz, Intel Xeon 7130M)

**SPECfp\_rate\_base2006 = 48.7**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Bull SAS

**Test date:** Mar-2007

**Hardware Availability:** Sep-2006

**Software Availability:** Nov-2006

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc7.1 -Qc99 ifort

## Peak Portability Flags

436.cactusADM: -Qlowercase /assume:underscore  
 444.namd: -TP  
 447.dealII: -DDEAL\_II\_MEMBER\_VAR\_SPECIALIZATION\_BUG  
 -DBOOST\_NO\_INTRINSIC\_WCHAR\_T  
 453.povray: -DSPEC\_CPU\_WINDOWS\_ICL  
 454.calculix: -DSPEC\_CPU\_NOZMODIFIER -Qlowercase  
 481.wrf: -DSPEC\_CPU\_WINDOWS\_ICL

## Peak Optimization Flags

C benchmarks:

-Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast /F950000000 shlw32m.lib  
-link /FORCE:MULTIPLE

C++ benchmarks:

-Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qcxx\_features  
/F950000000 shlw32m.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast /F950000000  
-link /FORCE:MULTIPLE

416.gamess: basepeak = yes

434.zeusmp: Same as 410.bwaves

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: Same as 410.bwaves

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECfp\_rate2006 = 49.6**

NovaScale R480 (3.20 GHz, Intel Xeon 7130M)

**SPECfp\_rate\_base2006 = 48.7**

**CPU2006 license:** 20  
**Test sponsor:** Bull SAS  
**Tested by:** Bull SAS

**Test date:** Mar-2007  
**Hardware Availability:** Sep-2006  
**Software Availability:** Nov-2006

## Peak Optimization Flags (Continued)

436.cactusADM: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast /F950000000  
-link /FORCE:MULTIPLE

454.calculix: Same as 436.cactusADM

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at  
<http://www.spec.org/cpu2006/flags/flags.20090714.00.html>

You can also download the XML flags source by saving the following link:  
<http://www.spec.org/cpu2006/flags/flags.20090714.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 11:55:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 17 April 2007.