



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX600 S3, Intel Xeon processor 7140M, 3.40 GHz

SPECint®_rate2006 = 80.6

SPECint_rate_base2006 = 75.5

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Mar-2007

Hardware Availability: Dec-2006

Software Availability: Feb-2007

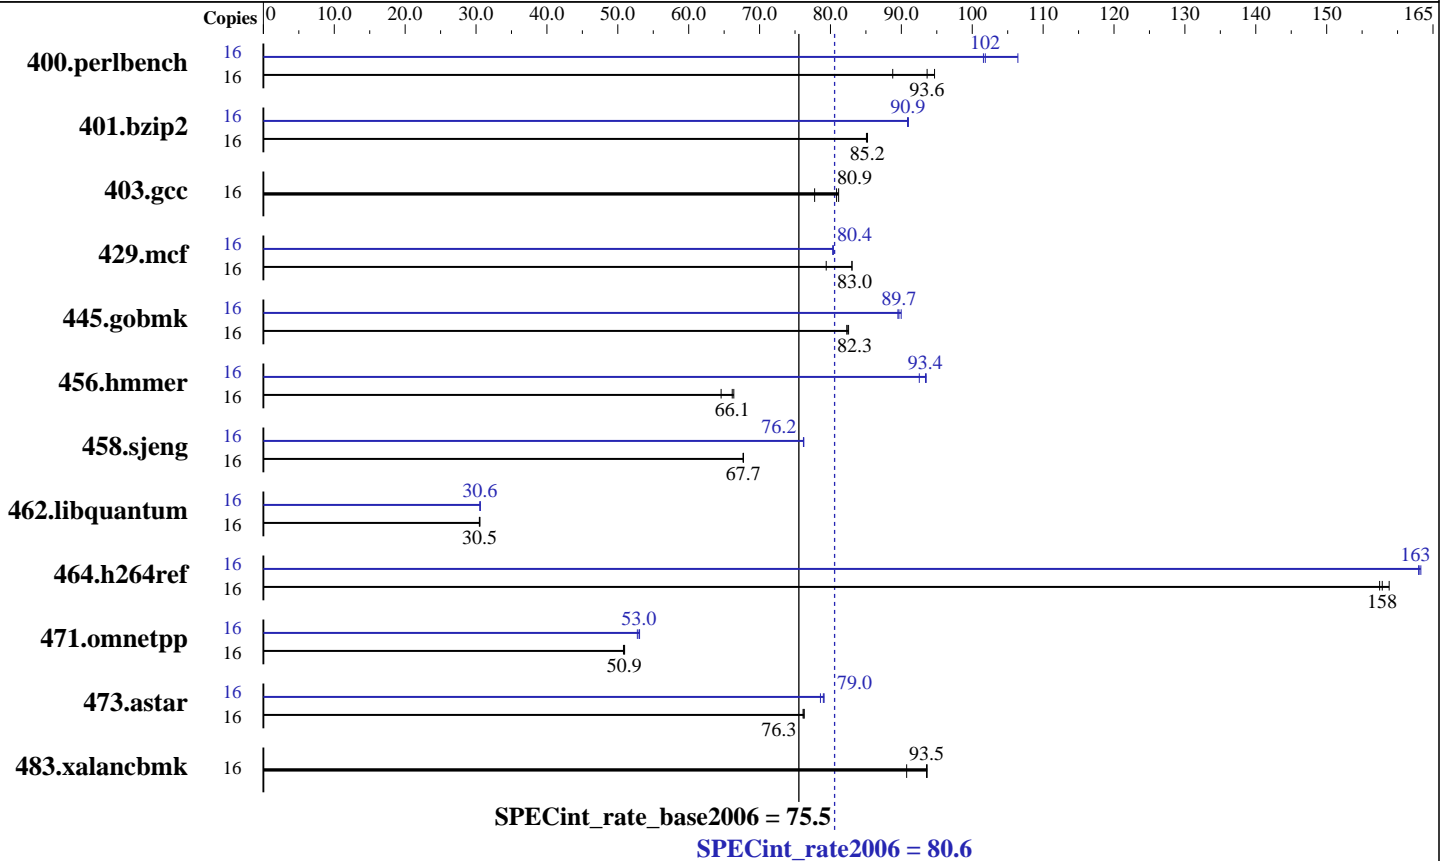

Hardware

CPU Name: Intel Xeon 7140M
 CPU Characteristics: 800 MHz system bus
 CPU MHz: 3400
 FPU: Integrated
 CPU(s) enabled: 8 cores, 4 chips, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2,4 chips
 Primary Cache: 12 K micro-ops I + 16 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core
 L3 Cache: 16 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (16x2 GB DDR2 PC2-3200R, 1 rank, CAS 3-3-3, with ECC)
 Disk Subsystem: Fujitsu MAS3735NC (SCSI 73GB 15 krpm)
 Other Hardware: None

Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 10, Kernel 2.6.16.21-0.8-smp on an x86_64
 Compiler: Intel C++ Compiler for IA32/EM64T application, Version 9.1 - Build 20070215, Package-ID: l_cc_p_9.1.047
 Auto Parallel: No
 File System: ReiserFS
 System State: Multiuser, Runlevel 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Smart Heap Library, Version 8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX600 S3, Intel Xeon processor 7140M,
3.40 GHz

SPECint_rate2006 = 80.6

SPECint_rate_base2006 = 75.5

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Mar-2007

Hardware Availability: Dec-2006

Software Availability: Feb-2007

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	1651	94.7	1761	88.8	1669	93.6	16	1539	102	1535	102	1469	106
401.bzip2	16	1815	85.1	1813	85.2	1812	85.2	16	1697	91.0	1699	90.9	1698	90.9
403.gcc	16	1587	81.2	1593	80.9	1656	77.8	16	1587	81.2	1593	80.9	1656	77.8
429.mcf	16	1758	83.0	1757	83.0	1838	79.4	16	1816	80.3	1815	80.4	1816	80.4
445.gobmk	16	2039	82.3	2033	82.6	2039	82.3	16	1865	90.0	1872	89.7	1875	89.5
456.hmmmer	16	2257	66.1	2249	66.4	2312	64.6	16	1596	93.5	1598	93.4	1613	92.5
458.sjeng	16	2858	67.7	2858	67.7	2861	67.7	16	2541	76.2	2540	76.2	2540	76.2
462.libquantum	16	10881	30.5	10864	30.5	10856	30.5	16	10849	30.6	10843	30.6	10839	30.6
464.h264ref	16	2249	157	2243	158	2229	159	16	2173	163	2168	163	2172	163
471.omnetpp	16	1969	50.8	1962	51.0	1965	50.9	16	1884	53.1	1887	53.0	1895	52.8
473.astar	16	1475	76.1	1473	76.3	1472	76.3	16	1420	79.1	1422	79.0	1429	78.6
483.xalancbmk	16	1180	93.5	1217	90.7	1179	93.6	16	1180	93.5	1217	90.7	1179	93.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs

General Notes

The system bus runs at 800 MHz

All binaries were built with 32-bit Intel compiler except:
401.bzip2, 456.hmmmer and 462.libquantum in peak were built with
64-bit Intel compiler by changing the path for include and library files.

BIOS configuration:
Hardware Prefetch = Enable

The PRIMERGY RX600 S3 and the PRIMERGY TX600 S3 are electronically equivalent.

For information about Fujitsu Siemens Computers in your country please see:
<http://www.fujitsu-siemens.com/countries>

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX600 S3, Intel Xeon processor 7140M,
3.40 GHz

SPECint_rate2006 = 80.6

SPECint_rate_base2006 = 75.5

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Mar-2007

Hardware Availability: Dec-2006

Software Availability: Feb-2007

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_X64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-xP -O3 -ipo -no-prec-div -L/opt/SmartHeap_8_1/lib -lsmarheap

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/cce/9.1.047/bin/icc
-I/opt/intel/cce/9.1.047/include
-L/opt/intel/cce/9.1.047/lib

456.hmmer: /opt/intel/cce/9.1.047/bin/icc
-I/opt/intel/cce/9.1.047/include
-L/opt/intel/cce/9.1.047/lib

462.libquantum: /opt/intel/cce/9.1.047/bin/icc
-I/opt/intel/cce/9.1.047/include
-L/opt/intel/cce/9.1.047/lib

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX600 S3, Intel Xeon processor 7140M,
3.40 GHz

SPECint_rate2006 = 80.6

SPECint_rate_base2006 = 75.5

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Mar-2007

Hardware Availability: Dec-2006

Software Availability: Feb-2007

Peak Portability Flags (Continued)

456.hmmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof_gen(pass 1) -prof_use(pass 2) -fast

401.bzip2: -fast

403.gcc: basepeak = yes

429.mcf: -prof_gen(pass 1) -prof_use(pass 2) -fast
-L/opt/SmartHeap_8_1/lib -lsmarheap

445.gobmk: Same as 429.mcf

456.hmmmer: Same as 400.perlbench

458.sjeng: Same as 429.mcf

462.libquantum: Same as 400.perlbench

464.h264ref: Same as 429.mcf

C++ benchmarks:

471.omnetpp: -prof_gen(pass 1) -prof_use(pass 2) -xP -O3 -ipo
-no-prec-div -L/opt/SmartHeap_8_1/lib -lsmarheap

473.astar: -prof_gen(pass 1) -prof_use(pass 2) -fast
-L/opt/SmartHeap_8_1/lib -lsmarheap

483.xalancbmk: basepeak = yes

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.09.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.09.xml



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX600 S3, Intel Xeon processor 7140M,
3.40 GHz

SPECint_rate2006 = 80.6

SPECint_rate_base2006 = 75.5

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Mar-2007

Hardware Availability: Dec-2006

Software Availability: Feb-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 11:59:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 April 2007.