



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sun Microsystems
Sun Fire E25K**

**SPECint_rate2006 = 1230
SPECint_rate_base2006 = 1120**

CPU2006 license: 6


Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Mar-2007

Hardware Availability: Apr-2007

Software Availability: May-2007

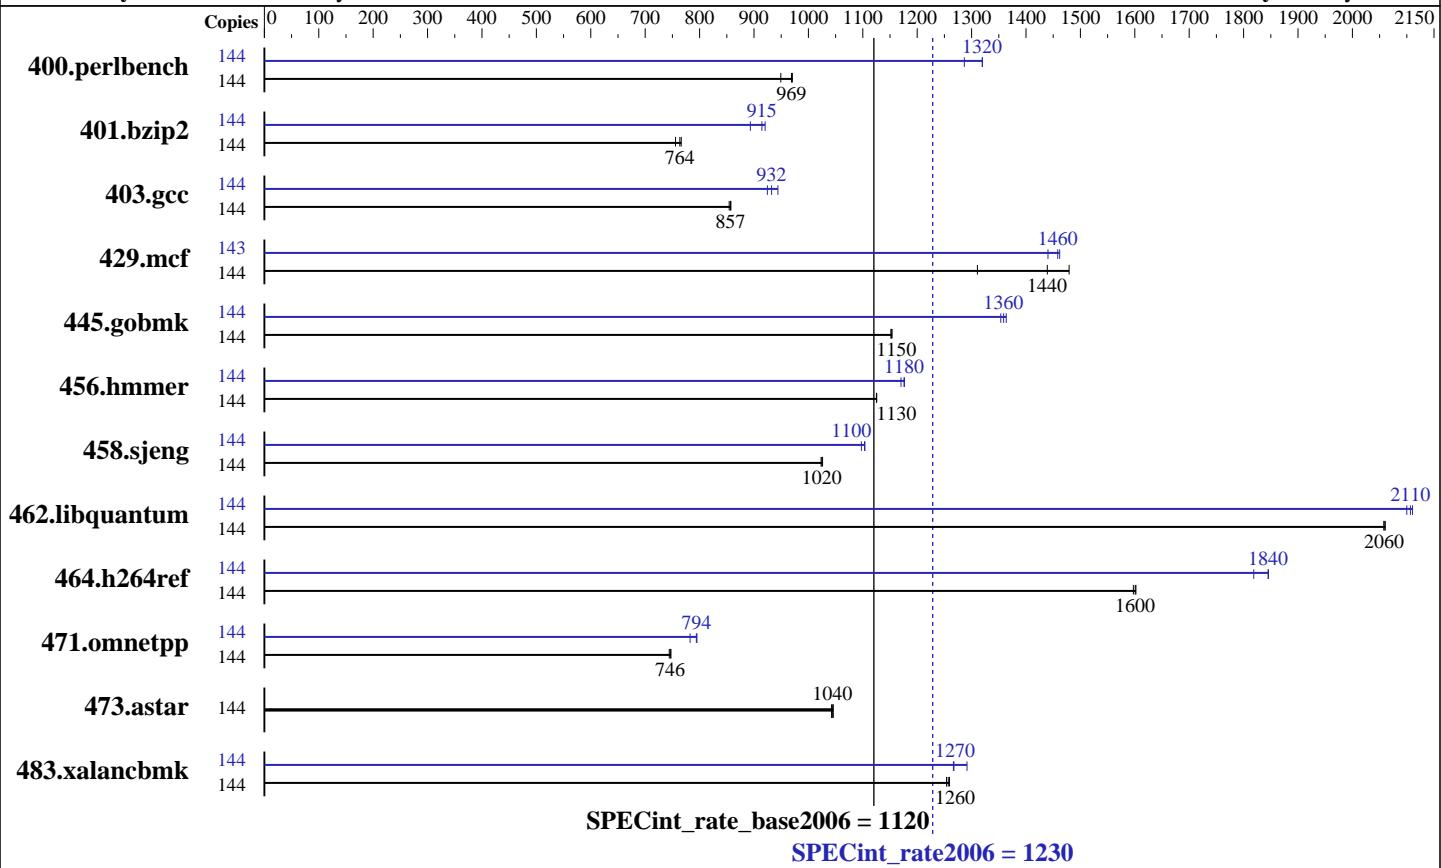

Hardware		Software	
CPU Name:	UltraSPARC IV+	Operating System:	Solaris 10 11/06
CPU Characteristics:		Compiler:	Sun Studio 12 (pre-release build 43)
CPU MHz:	1950	Auto Parallel:	No
FPU:	Integrated	File System:	ufs
CPU(s) enabled:	144 cores, 72 chips, 2 cores/chip	System State:	Default
CPU(s) orderable:	4-72 (order by number of chips, groups of 4)	Base Pointers:	32-bit
Primary Cache:	64 KB I + 64 KB D on chip per core	Peak Pointers:	32-bit
Secondary Cache:	2 MB I+D on chip per chip	Other Software:	None
L3 Cache:	32 MB I+D off chip per chip		
Other Cache:	None		
Memory:	304 GB, 8-way interleaved (272 x 1 GB, 16 x 2 GB)		
Disk Subsystem:	System: Sun StorageTek D240 Media Tray (2x73GB) SPEC: Sun StorageTek 6140 (5x146GB 10K FC-AL RAID5)		
Other Hardware:	None		



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sun Microsystems
Sun Fire E25K**

**SPECint_rate2006 = 1230
SPECint_rate_base2006 = 1120**

CPU2006 license: 6

Test date: Mar-2007

Test sponsor: Sun Microsystems

Hardware Availability: Apr-2007

Tested by: Sun Microsystems

Software Availability: May-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	144	1482	949	1450	971	1452	969	144	1093	1290	1066	1320	1066	1320
401.bzip2	144	1839	756	1813	766	1820	764	144	1556	893	1519	915	1510	921
403.gcc	144	1353	857	1357	854	1352	858	144	1243	932	1254	925	1228	944
429.mcf	144	912	1440	1002	1310	888	1480	143	905	1440	892	1460	894	1460
445.gobmk	144	1311	1150	1309	1150	1311	1150	144	1112	1360	1116	1350	1108	1360
456.hammer	144	1194	1130	1194	1130	1194	1130	144	1143	1180	1142	1180	1148	1170
458.sjeng	144	1698	1030	1700	1020	1703	1020	144	1579	1100	1588	1100	1578	1100
462.libquantum	144	1450	2060	1448	2060	1450	2060	144	1416	2110	1421	2100	1414	2110
464.h264ref	144	1989	1600	1991	1600	1995	1600	144	1727	1850	1752	1820	1727	1840
471.omnetpp	144	1204	747	1206	746	1209	744	144	1133	794	1150	783	1132	795
473.astar	144	968	1040	970	1040	967	1050	144	968	1040	970	1040	967	1050
483.xalancbmk	144	792	1250	789	1260	790	1260	144	784	1270	769	1290	784	1270

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Processes were bound to cores using "submit" and "pbind" except for peak runs of 403.gcc, 456.hammer, and 483.xalancbmk.

```
"ulimit -s unlimited"
Allows stack to grow until system limit.
```

/etc/system parameters

```
tune_t_fsflushr=3
Controls how many seconds elapse between runs of the
page flush daemon, fsflush.
autooup=1200
Causes pages older than the listed number of seconds to
be written by fsflush.
bufhwm=3000
Memory byte limit for caching I/O buffers
segmap_percent=1
Set maximum percent memory for file system cache
ts_dispatch_extended=0
Selects default dispatch table, rather than large server table
```

Platform Notes

The tested system had 18 system boards. The first 17 system boards were equipped with 16GB of memory; the last

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire E25K

SPECint_rate2006 = 1230

SPECint_rate_base2006 = 1120

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Mar-2007

Hardware Availability: Apr-2007

Software Availability: May-2007

Platform Notes (Continued)

system board had 32GB. All memory was 8-way interleaved.

Base Compiler Invocation

C benchmarks:

/export/ptmp/keeper/build43.0/SUNWspro/bin/cc

C++ benchmarks:

/export/ptmp/keeper/build43.0/SUNWspro/bin/CC

Base Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC

403.gcc: -DSPEC_CPU_SOLARIS

462.libquantum: -DSPEC_CPU_SOLARIS

483.xalancbmk: -DSPEC_CPU_SOLARIS

Base Optimization Flags

C benchmarks:

-fast -xipo=2 -xpagesize=4M -xprefetch_level=2 -xalias_level=std

C++ benchmarks:

-library=stlport4 -xdepend -fast -xipo=2 -xpagesize=4M
-xprefetch_level=1 -xalias_level=compatible -lfast

Base Other Flags

C benchmarks:

-xjobs=24 -V

C++ benchmarks:

-xjobs=24 -verbose=version

Peak Compiler Invocation

C benchmarks:

/export/ptmp/keeper/build43.0/SUNWspro/bin/cc

C++ benchmarks:

/export/ptmp/keeper/build43.0/SUNWspro/bin/CC



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire E25K

SPECint_rate2006 = 1230
SPECint_rate_base2006 = 1120

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Mar-2007

Hardware Availability: Apr-2007

Software Availability: May-2007

Peak Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS

Peak Optimization Flags

C benchmarks:

400.perlbench: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagemsize=4M
-xalias_level=std -Xc -xi=2 -xrestrict -lfast

401.bzip2: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagemsize=4M
-xalias_level=strong

403.gcc: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagemsize=4M
-xi=2 -xalias_level=std -xprefetch_level=2

429.mcf: -fast -xpagemsize=4M -xprefetch_level=2 -xi=2 -xrestrict
-xalias_level=std -lfast

445.gobmk: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagemsize=4M
-xalias_level=std -xrestrict

456.hmmr: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagemsize=4M
-xi=2 -xalias_level=strong

458.sjeng: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagemsize=4M
-xi=2

462.libquantum: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagemsize=4M
-xprefetch_level=2 -xi=2

464.h264ref: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagemsize=4M
-xi=2 -xalias_level=std -l12amm

C++ benchmarks:

471.omnetpp: -library=stlport4 -xdepend
-xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagemsize=4M

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire E25K

SPECint_rate2006 = 1230
SPECint_rate_base2006 = 1120

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Mar-2007

Hardware Availability: Apr-2007

Software Availability: May-2007

Peak Optimization Flags (Continued)

471.omnetpp (continued):

-xipo=2 -Qoption cg -Qlp-av=0 -lfast

473.astar: basepeak = yes

483.xalancbmk: -library=stlport4 -xdepend -fast -xpagesize=4M

-xprefetch_level=1 -xipo=2 -xalias_level=compatible -lfast

Peak Other Flags

C benchmarks:

-xjobs=24 -V

C++ benchmarks:

-xjobs=24 -verbose=version

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12.20090714.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12.20090714.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.1.

Report generated on Tue Jul 22 12:04:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 17 April 2007.