



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems Sun Fire E6900

SPECint®_rate2006 = 288
SPECint_rate_base2006 = 261

CPU2006 license: 6


Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Mar-2007

Hardware Availability: Apr-2007

Software Availability: May-2007

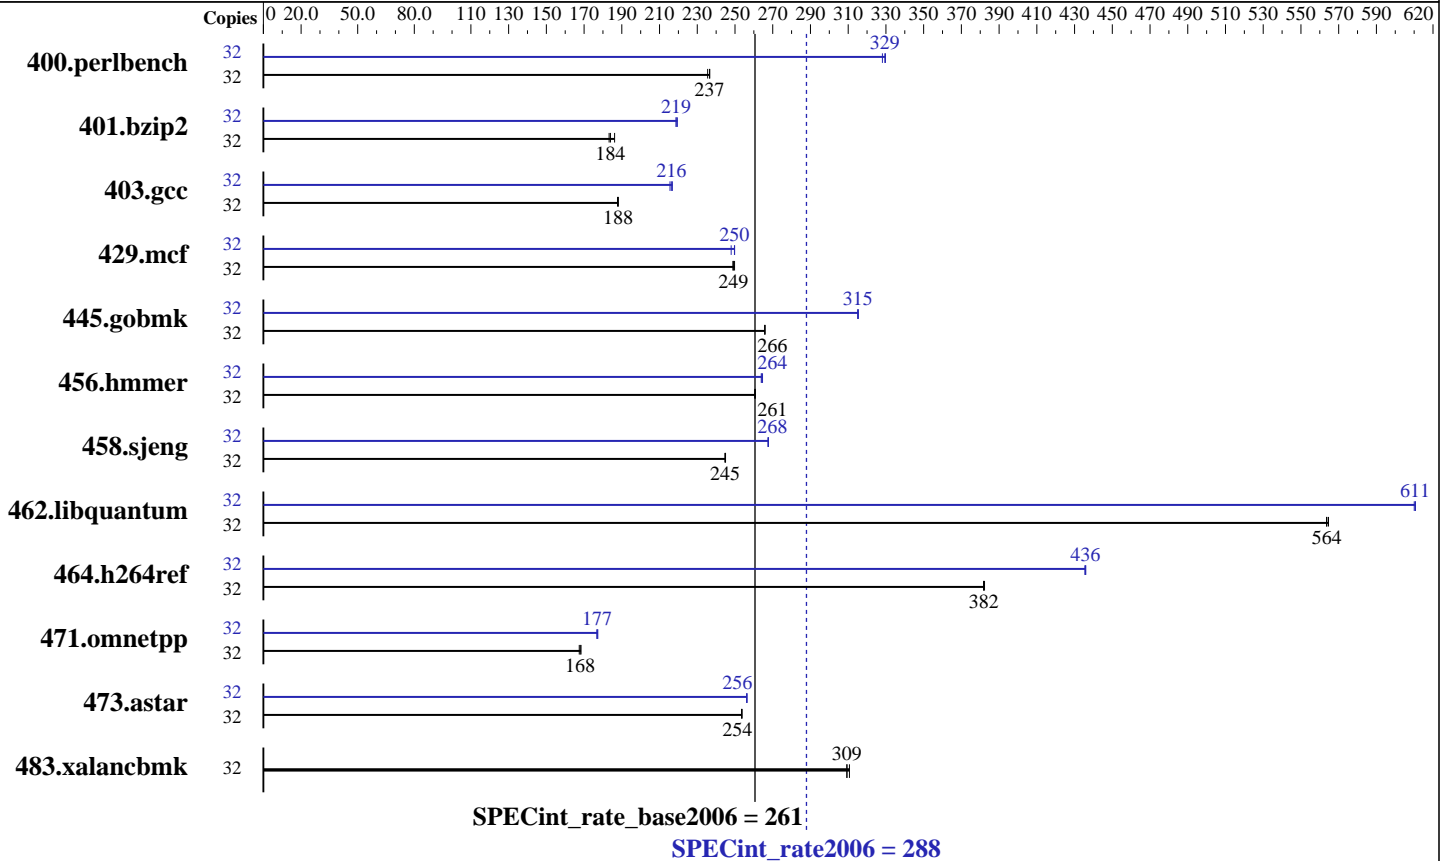

Hardware

CPU Name: UltraSPARC IV+
 CPU Characteristics: 1950
 CPU MHz: Integrated
 FPU: Integrated
 CPU(s) enabled: 32 cores, 16 chips, 2 cores/chip
 CPU(s) orderable: 4, 8, 12, 16, 20, 24
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 2 MB I+D on chip per chip
 L3 Cache: 32 MB I+D off chip per chip
 Other Cache: None
 Memory: 64 GB, 8-way interleaved (64 x 1 GB)
 Disk Subsystem: System: Sun StoreTek D240 Media Tray (2x73GB)
 SPEC: Sun StorageTek 6140
 (5x146GB 10K FC-AL RAID5)
 Other Hardware: None

Software

Operating System: Solaris 10 11/06
 Compiler: Sun Studio 12 (pre-release build 43)
 Auto Parallel: No
 File System: ufs
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: None



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire E6900

SPECint_rate2006 = 288
SPECint_rate_base2006 = 261

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Mar-2007
Hardware Availability: Apr-2007
Software Availability: May-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	1328	235	1321	237	<u>1322</u>	<u>237</u>	32	953	328	<u>949</u>	<u>329</u>	948	330
401.bzip2	32	1659	186	<u>1679</u>	<u>184</u>	1685	183	32	<u>1411</u>	<u>219</u>	1412	219	1407	219
403.gcc	32	1372	188	<u>1370</u>	<u>188</u>	1369	188	32	1188	217	1195	216	<u>1191</u>	<u>216</u>
429.mcf	32	1173	249	1168	250	<u>1171</u>	<u>249</u>	32	1177	248	1168	250	<u>1169</u>	<u>250</u>
445.gobmk	32	1263	266	<u>1263</u>	<u>266</u>	1262	266	32	1064	315	1066	315	<u>1065</u>	<u>315</u>
456.hmmmer	32	1146	260	1145	261	<u>1145</u>	<u>261</u>	32	1128	265	1131	264	<u>1130</u>	<u>264</u>
458.sjeng	32	1581	245	1582	245	<u>1582</u>	<u>245</u>	32	1446	268	<u>1447</u>	<u>268</u>	1448	267
462.libquantum	32	<u>1176</u>	<u>564</u>	1177	564	1174	565	32	<u>1086</u>	<u>611</u>	1086	611	1087	610
464.h264ref	32	<u>1855</u>	<u>382</u>	1855	382	1852	382	32	1624	436	<u>1625</u>	<u>436</u>	1626	435
471.omnetpp	32	1188	168	1194	167	<u>1191</u>	<u>168</u>	32	1128	177	<u>1130</u>	<u>177</u>	1132	177
473.astar	32	<u>886</u>	<u>254</u>	885	254	886	254	32	877	256	876	256	<u>876</u>	<u>256</u>
483.xalancbmk	32	<u>714</u>	<u>309</u>	711	311	714	309	32	<u>714</u>	<u>309</u>	711	311	714	309

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Processes were bound to cores using "submit" and "pbind" except for peak runs of 403.gcc, 456.hmmmer, and 483.xalancbmk.

```
"ulimit -s unlimited"
  Allows stack to grow until system limit.
```

```
/etc/system parameters
```

```
tune_t_fsflushr=3
  Controls how many seconds elapse between runs of the
  page flush daemon, fsflush.
autoup=900
  Causes pages older than the listed number of seconds to
  be written by fsflush.
bufhwm=3000
  Sets a memory byte limit for caching I/O buffers.
segmap_percent=1
  Sets the maximum percent of memory for file system cache.
```

Base Compiler Invocation

C benchmarks:
/export/ptmp/keeper/build43.0/SUNWspro/bin/cc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire E6900

SPECint_rate2006 = 288
SPECint_rate_base2006 = 261

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Mar-2007
Hardware Availability: Apr-2007
Software Availability: May-2007

Base Compiler Invocation (Continued)

C++ benchmarks:
/export/ptmp/keeper/build43.0/SUNWspro/bin/CC

Base Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS

Base Optimization Flags

C benchmarks:
-fast -xipo=2 -xpagesize=4M -xprefetch_level=2 -xalias_level=std

C++ benchmarks:
-library=stlport4 -xdepend -fast -xipo=2 -xpagesize=4M
-xprefetch_level=1 -xalias_level=compatible -lfast

Base Other Flags

C benchmarks:
-xjobs=24 -V

C++ benchmarks:
-xjobs=24 -verbose=version

Peak Compiler Invocation

C benchmarks:
/export/ptmp/keeper/build43.0/SUNWspro/bin/cc

C++ benchmarks:
/export/ptmp/keeper/build43.0/SUNWspro/bin/CC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
403.gcc: -DSPEC_CPU_SOLARIS

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire E6900

SPECint_rate2006 = 288
SPECint_rate_base2006 = 261

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Mar-2007
Hardware Availability: Apr-2007
Software Availability: May-2007

Peak Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS

Peak Optimization Flags

C benchmarks:

400.perlbench: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=std -Xc -xipo=2 -xrestrict -lfast

401.bzip2: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=strong

403.gcc: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xipo=2 -xalias_level=std -xprefetch_level=2

429.mcf: -fast -xpagesize=4M -xprefetch_level=2 -xipo=2 -xrestrict
-xalias_level=std -lfast

445.gobmk: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=std -xrestrict

456.hmmer: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xipo=2 -xalias_level=strong

458.sjeng: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xipo=2

462.libquantum: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xprefetch_level=2 -xipo=2

464.h264ref: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xipo=2 -xalias_level=std -ll2amm

C++ benchmarks:

471.omnetpp: -library=stlport4 -xdepend
-xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xipo=2 -Qoption cg -Qlp-av=0 -lfast

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire E6900

SPECint_rate2006 = 288
SPECint_rate_base2006 = 261

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Mar-2007
Hardware Availability: Apr-2007
Software Availability: May-2007

Peak Optimization Flags (Continued)

```
473.astar: -library=stlport4 -xdepend -fast -xpagesize=4M -xipo=2
          -xprefetch_level=2
          -xprefetch_auto_type=indirect_array_access
          -xalias_level=compatible -xrestrict -lfast
```

```
483.xalancbmk: basepeak = yes
```

Peak Other Flags

C benchmarks:
-xjobs=24 -V

C++ benchmarks:
-xjobs=24 -verbose=version

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12.20090714.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12.20090714.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 11:58:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 April 2007.