



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Limited PRIMEQUEST 580

**SPECint®\_rate2006 = 715**  
**SPECint\_rate\_base2006 = 652**

CPU2006 license: 19


Test sponsor: Fujitsu Limited

Tested by: Fujitsu Limited

Test date: Apr-2007

Hardware Availability: Aug-2006

Software Availability: Apr-2007

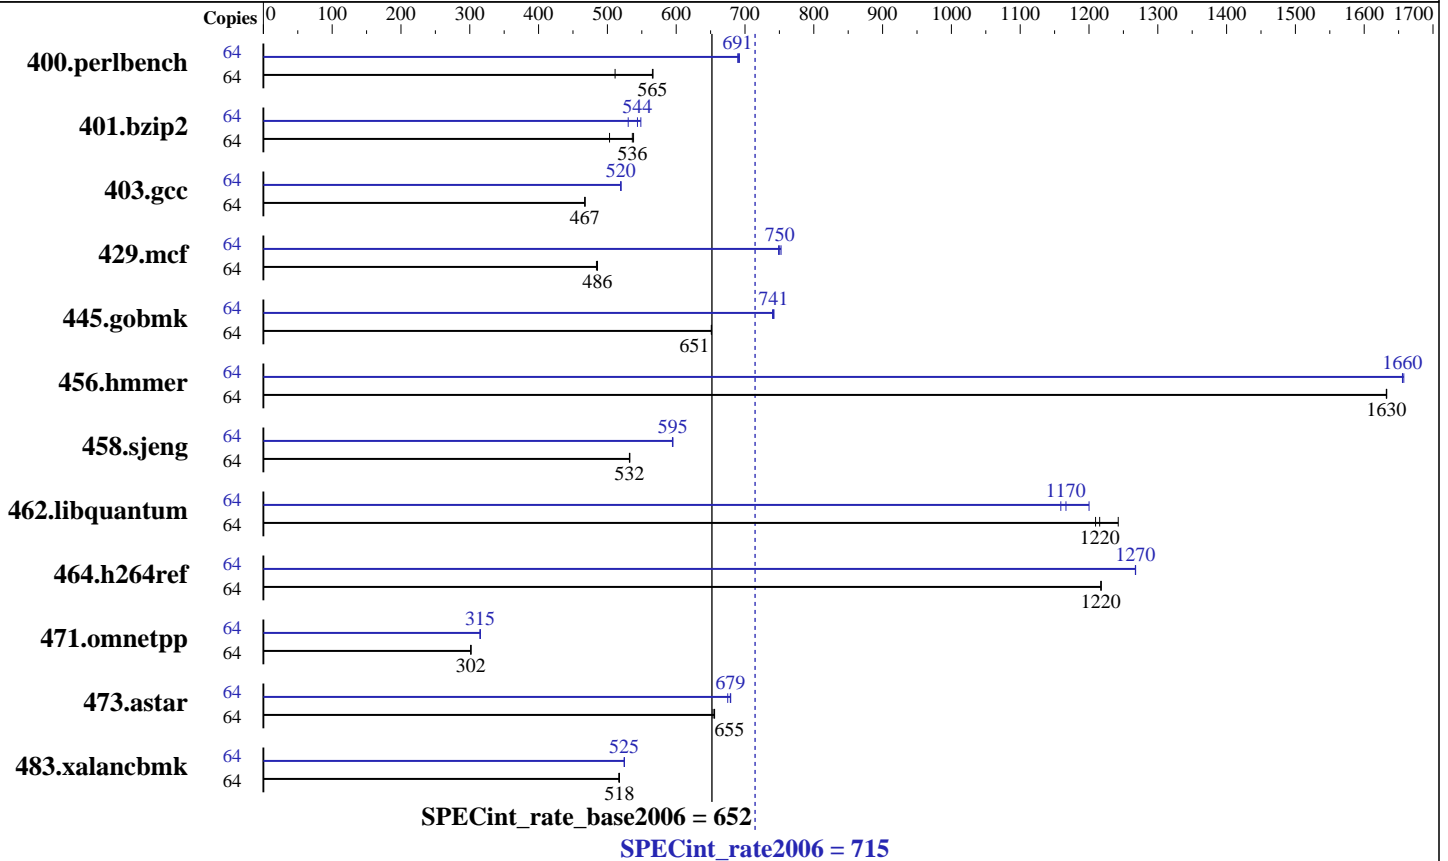

### Hardware

CPU Name: Dual-Core Intel Itanium 2 9050  
 CPU Characteristics: 1.6GHz/24MB, 533MHz FSB  
 CPU MHz: 1600  
 FPU: Integrated  
 CPU(s) enabled: 64 cores, 32 chips, 2 cores/chip  
 CPU(s) orderable: 1-32 chips  
 Primary Cache: 16 KB I + 16 KB D on chip per core  
 Secondary Cache: 1 MB I + 256 KB D on chip per core  
 L3 Cache: 12 MB I+D on chip per core  
 Other Cache: None  
 Memory: 256 GB (256 x 1GB DDR2-533 DIMMs)  
 Disk Subsystem: Fujitsu MAW3147NC (SCSI Ultra 320) x 2  
 147GB 10,025rpm, No RAID configuration  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux 5 (for Intel Itanium)  
 Compiler: Intel C++ Compiler for Itanium/Linux 9.1 (Build 20061105)  
 Auto Parallel: No  
 File System: ext2  
 System State: Single-user  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: MicroQuill Smartheap 8.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited  
PRIMEQUEST 580

SPECint\_rate2006 = 715  
SPECint\_rate\_base2006 = 652

CPU2006 license: 19  
Test sponsor: Fujitsu Limited  
Tested by: Fujitsu Limited

Test date: Apr-2007  
Hardware Availability: Aug-2006  
Software Availability: Apr-2007

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	<b><u>1106</u></b>	<b><u>565</u></b>	1223	511	1104	566	64	907	689	904	692	<b><u>905</u></b>	<b><u>691</u></b>
401.bzip2	64	<b><u>1152</u></b>	<b><u>536</u></b>	1227	503	1148	538	64	1165	530	<b><u>1136</u></b>	<b><u>544</u></b>	1126	549
403.gcc	64	<b><u>1102</u></b>	<b><u>467</u></b>	1102	467	1103	467	64	<b><u>991</u></b>	<b><u>520</u></b>	992	519	991	520
429.mcf	64	1202	486	<b><u>1202</u></b>	<b><u>486</u></b>	1206	484	64	776	752	<b><u>778</u></b>	<b><u>750</u></b>	779	749
445.gobmk	64	<b><u>1031</u></b>	<b><u>651</u></b>	1031	651	1031	651	64	907	740	905	742	<b><u>906</u></b>	<b><u>741</u></b>
456.hmmer	64	366	1630	366	1630	<b><u>366</u></b>	<b><u>1630</u></b>	64	<b><u>361</u></b>	<b><u>1660</u></b>	360	1660	361	1660
458.sjeng	64	1456	532	<b><u>1455</u></b>	<b><u>532</u></b>	1454	533	64	1301	595	<b><u>1301</u></b>	<b><u>595</u></b>	1302	595
462.libquantum	64	1096	1210	1067	1240	<b><u>1091</u></b>	<b><u>1220</u></b>	64	<b><u>1137</u></b>	<b><u>1170</u></b>	1144	1160	1105	1200
464.h264ref	64	1163	1220	<b><u>1163</u></b>	<b><u>1220</u></b>	1163	1220	64	<b><u>1117</u></b>	<b><u>1270</u></b>	1117	1270	1117	1270
471.omnetpp	64	<b><u>1326</u></b>	<b><u>302</u></b>	1326	302	1327	302	64	1268	315	1270	315	<b><u>1269</u></b>	<b><u>315</u></b>
473.astar	64	<b><u>685</u></b>	<b><u>655</u></b>	687	654	685	656	64	666	675	661	679	<b><u>662</u></b>	<b><u>679</u></b>
483.xalancbmk	64	855	517	<b><u>853</u></b>	<b><u>518</u></b>	853	518	64	<b><u>842</u></b>	<b><u>525</u></b>	842	525	841	525

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

Processes are bound to CPUs using numactl and taskset.  
limit stacksize unlimited  
Memory system is in "Non Mirror Mode".

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_IA64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited  
PRIMEQUEST 580

SPECint\_rate2006 = 715

SPECint\_rate\_base2006 = 652

CPU2006 license: 19  
Test sponsor: Fujitsu Limited  
Tested by: Fujitsu Limited

Test date: Apr-2007  
Hardware Availability: Aug-2006  
Software Availability: Apr-2007

## Base Portability Flags (Continued)

464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-fast -IPF\_fp\_relaxed -ansi-alias  
C++ benchmarks:  
-fast -IPF\_fp\_relaxed -ansi-alias -Wl,-z,muldefs  
/opt/SmartHeap\_8/lib/libsmartheapC64.a  
/opt/SmartHeap\_8/lib/libsmartheap64.a

## Peak Compiler Invocation

C benchmarks:  
icc  
C++ benchmarks:  
icpc

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:  
400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -IPF\_fp\_relaxed  
-mtune=itanium2-p9000 -inline-max-size=550  
-inline-min-size=40  
401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -IPF\_fp\_relaxed  
-auto-ilp32 -ansi-alias  
403.gcc: -prof-gen(pass 1) -prof-use(pass 2) -fast -IPF\_fp\_relaxed  
-auto-ilp32 -ansi-alias -opt-mem-bandwidth2

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited  
PRIMEQUEST 580

SPECint\_rate2006 = 715  
SPECint\_rate\_base2006 = 652

CPU2006 license: 19  
Test sponsor: Fujitsu Limited  
Tested by: Fujitsu Limited

Test date: Apr-2007  
Hardware Availability: Aug-2006  
Software Availability: Apr-2007

## Peak Optimization Flags (Continued)

429.mcf: -fast -IPF\_fp\_relaxed -auto-ilp32 -ansi  
-inline-max-total-size=5000  
445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -O2 -IPF\_fp\_relaxed  
-static -ipo -auto-ilp32  
456.hmmr: -fast -IPF\_fp\_relaxed -auto-ilp32  
458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -IPF\_fp\_relaxed  
462.libquantum: -fast -IPF\_fp\_relaxed -ansi-alias -auto-ilp32  
-mtune=itanium2-p9000  
464.h264ref: -fast -IPF\_fp\_relaxed -inline-max-size=100

### C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -O2 -IPF\_fp\_relaxed  
-static -ipo -inline-max-per-routine=50 -Wl,-z,muldefs  
/opt/SmartHeap\_8/lib/libsmartheapC64.a  
/opt/SmartHeap\_8/lib/libsmartheap64.a  
473.astar: -prof-gen(pass 1) -prof-use(pass 2) -O2 -static -ipo  
-inline-max-size=5000 -Wl,-z,muldefs  
/opt/SmartHeap\_8/lib/libsmartheapC64.a  
/opt/SmartHeap\_8/lib/libsmartheap64.a  
483.xalancbmk: -prof-gen(pass 1) -prof-use(pass 2) -O2 -static -ipo  
-ansi-alias -Wl,-z,muldefs  
/opt/SmartHeap\_8/lib/libsmartheapC64.a  
/opt/SmartHeap\_8/lib/libsmartheap64.a

The flags file that was used to format this result can be browsed at  
<http://www.spec.org/cpu2006/flags/Fujitsu.PQ580.ipf.linux.flags.html>

You can also download the XML flags source by saving the following link:  
<http://www.spec.org/cpu2006/flags/Fujitsu.PQ580.ipf.linux.flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 12:08:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 May 2007.