



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY BX620 S3, Intel Xeon processor E5320,
1.86 GHz

SPECint_rate2006 = 67.8

SPECint_rate_base2006 = 64.5

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Apr-2007

Hardware Availability: Nov-2006

Software Availability: Feb-2007

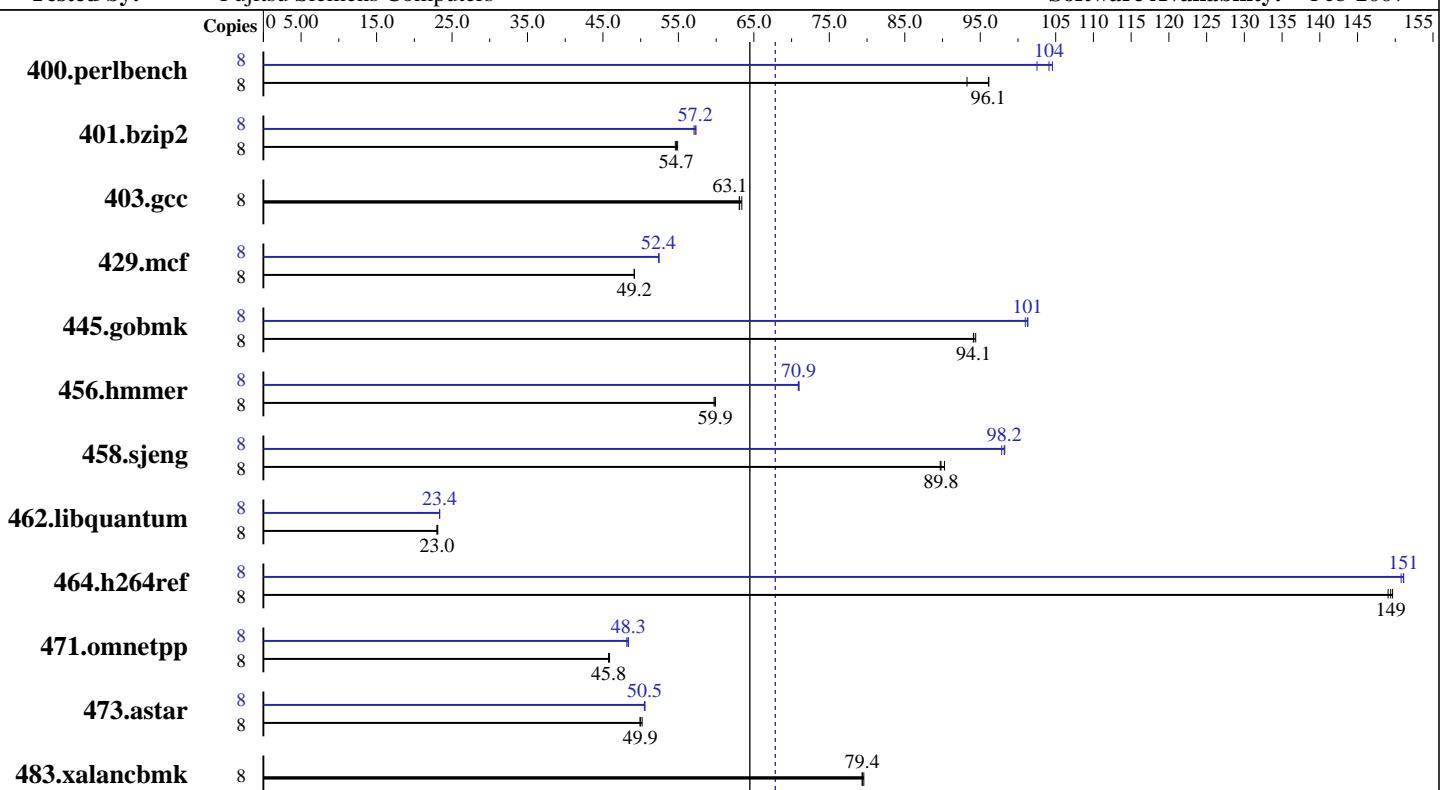

SPECint_rate_base2006 = 64.5

SPECint_rate2006 = 67.8

Hardware

CPU Name:	Intel Xeon E5320
CPU Characteristics:	1067 MHz system bus
CPU MHz:	1867
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8x2 GB DDR2 PC2-5300F, 2 rank, CAS 5-5-5, with ECC)
Disk Subsystem:	SAS (36GB 10000 rpm)
Other Hardware:	None

Software

Operating System:	64-Bit SUSE LINUX Enterprise Server 10, Kernel 2.6.16.21-0.8-smp on an x86_64
Compiler:	Intel C++ Compiler for IA32/EM64T application, Version 9.1 - Build 20070215, Package-ID: l_cc_p_9.1.047
Auto Parallel:	No
File System:	ext2
System State:	Multiuser, Runlevel 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Smart Heap Library, Version 8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY BX620 S3, Intel Xeon processor E5320,
1.86 GHz

SPECint_rate2006 = 67.8

SPECint_rate_base2006 = 64.5

CPU2006 license: 22

Test date: Apr-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Nov-2006

Tested by: Fujitsu Siemens Computers

Software Availability: Feb-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	838	93.3	813	96.1	813	96.1	8	747	105	751	104	762	103
401.bzip2	8	1410	54.7	1406	54.9	1414	54.6	8	1353	57.1	1349	57.2	1346	57.3
403.gcc	8	1021	63.1	1016	63.4	1020	63.1	8	1021	63.1	1016	63.4	1020	63.1
429.mcf	8	1484	49.2	1484	49.2	1484	49.2	8	1393	52.4	1392	52.4	1392	52.4
445.gobmk	8	891	94.1	889	94.4	892	94.1	8	831	101	829	101	828	101
456.hammer	8	1250	59.7	1247	59.9	1246	59.9	8	1052	71.0	1052	70.9	1053	70.9
458.sjeng	8	1078	89.8	1072	90.3	1079	89.7	8	986	98.2	985	98.3	989	97.8
462.libquantum	8	7200	23.0	7201	23.0	7171	23.1	8	7096	23.4	7099	23.3	7099	23.4
464.h264ref	8	1183	150	1188	149	1185	149	8	1172	151	1172	151	1174	151
471.omnetpp	8	1092	45.8	1093	45.8	1090	45.9	8	1034	48.3	1034	48.4	1038	48.2
473.astar	8	1119	50.2	1124	49.9	1125	49.9	8	1111	50.5	1111	50.6	1112	50.5
483.xalancbmk	8	694	79.6	695	79.4	696	79.3	8	694	79.6	695	79.4	696	79.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs

General Notes

The system bus runs at 1067 MHz

All binaries were built with 32-bit Intel compiler except:
401.bzip2, 456.hammer and 462.libquantum in peak were built with
64-bit Intel compiler by changing the path for include and library files.

BIOS configuration:
Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable

For information about Fujitsu Siemens Computers in your country please see:
<http://www.fujitsu-siemens.com/countries>

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY BX620 S3, Intel Xeon processor E5320,
1.86 GHz

SPECint_rate2006 = 67.8

SPECint_rate_base2006 = 64.5

CPU2006 license: 22

Test date: Apr-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Nov-2006

Tested by: Fujitsu Siemens Computers

Software Availability: Feb-2007

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_X64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-xP -O3 -ipo -no-prec-div -L/opt/SmartHeap_8_1/lib -lsmartheap

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/cce/9.1.047/bin/icc
-I/opt/intel/cce/9.1.047/include
-L/opt/intel/cce/9.1.047/lib

456.hmmr: /opt/intel/cce/9.1.047/bin/icc
-I/opt/intel/cce/9.1.047/include
-L/opt/intel/cce/9.1.047/lib

462.libquantum: /opt/intel/cce/9.1.047/bin/icc
-I/opt/intel/cce/9.1.047/include
-L/opt/intel/cce/9.1.047/lib

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY BX620 S3, Intel Xeon processor E5320,
1.86 GHz

SPECint_rate2006 = 67.8

SPECint_rate_base2006 = 64.5

CPU2006 license: 22

Test date: Apr-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Nov-2006

Tested by: Fujitsu Siemens Computers

Software Availability: Feb-2007

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof_gen(pass 1) -prof_use(pass 2) -fast

401.bzip2: -fast

403.gcc: basepeak = yes

429.mcf: -prof_gen(pass 1) -prof_use(pass 2) -fast
-L/opt/SmartHeap_8_1/lib -lsmartheap

445.gobmk: Same as 429.mcf

456.hmmer: Same as 400.perlbench

458.sjeng: Same as 429.mcf

462.libquantum: Same as 400.perlbench

464.h264ref: Same as 429.mcf

C++ benchmarks:

471.omnetpp: -prof_gen(pass 1) -prof_use(pass 2) -xP -O3 -ipo
-no-prec-div -L/opt/SmartHeap_8_1/lib -lsmartheap

473.astar: -prof_gen(pass 1) -prof_use(pass 2) -fast
-L/opt/SmartHeap_8_1/lib -lsmartheap

483.xalancbmk: basepeak = yes

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.09.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.09.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 11:39:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 May 2007.