



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp[®]_rate2006 = 600

Sun SPARC Enterprise M9000

SPECfp_rate_base2006 = 556

CPU2006 license: 6


Test date: May-2007

Test sponsor: Sun Microsystems

Hardware Availability: Apr-2007

Tested by: Fujitsu Limited

Software Availability: May-2007

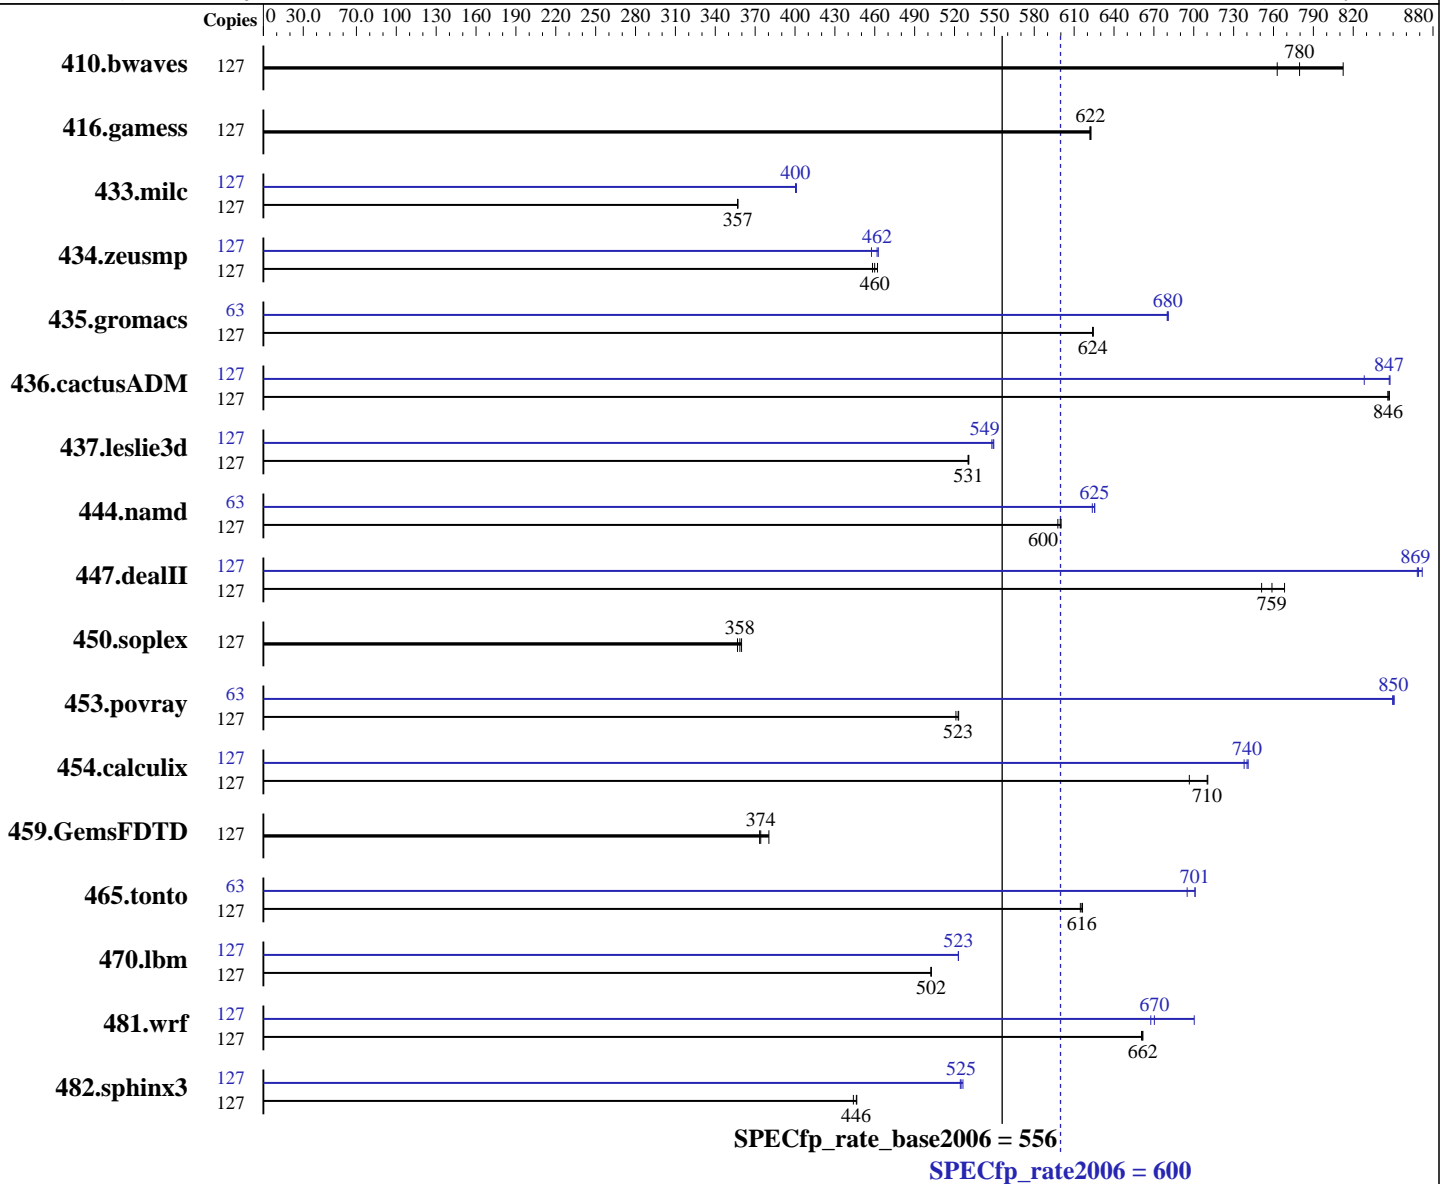

Hardware

CPU Name: SPARC64 VI
 CPU Characteristics:
 CPU MHz: 2280
 FPU: Integrated
 CPU(s) enabled: 64 cores, 32 chips, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 1 to 8 CMUs; each CMU contains 2 or 4 chips
 Primary Cache: 128 KB I + 128 KB D on chip per core
 Secondary Cache: 5 MB I+D on chip per chip

Continued on next page

Software

Operating System: Solaris 10 11/06
 Compiler: Sun Studio 12 (Early Access)
 Auto Parallel: No
 File System: ufs
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: None



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = **600**

Sun SPARC Enterprise M9000

SPECfp_rate_base2006 = **556**

CPU2006 license: 6

Test date: May-2007

Test sponsor: Sun Microsystems

Hardware Availability: Apr-2007

Tested by: Fujitsu Limited

Software Availability: May-2007

L3 Cache: None
 Other Cache: None
 Memory: 256 GB (256 x 1 GB)
 Disk Subsystem: 1095 GB RAID 0 using 15 x 73 GB,
 10,000 RPM Fujitsu ETERNUS4000 Model 80
 Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	127	2263	763	<u>2214</u>	<u>780</u>	2124	812	127	2263	763	<u>2214</u>	<u>780</u>	2124	812
416.gamess	127	<u>3996</u>	<u>622</u>	3994	623	3999	622	127	<u>3996</u>	<u>622</u>	3994	623	3999	622
433.milc	127	3267	357	3266	357	<u>3266</u>	<u>357</u>	127	2911	400	<u>2911</u>	<u>400</u>	2907	401
434.zeusmp	127	2501	462	2522	458	<u>2513</u>	<u>460</u>	127	<u>2503</u>	<u>462</u>	2498	463	2526	458
435.gromacs	127	1452	624	1453	624	<u>1453</u>	<u>624</u>	63	661	681	<u>661</u>	<u>680</u>	661	680
436.cactusADM	127	<u>1793</u>	<u>846</u>	1794	846	1791	847	127	1832	828	1790	848	<u>1792</u>	<u>847</u>
437.leslie3d	127	2249	531	2252	530	<u>2250</u>	<u>531</u>	127	<u>2174</u>	<u>549</u>	2178	548	2172	550
444.namd	127	<u>1699</u>	<u>600</u>	1697	600	1704	598	63	<u>808</u>	<u>625</u>	808	625	810	624
447.dealII	127	<u>1915</u>	<u>759</u>	1891	768	1934	751	127	1673	868	<u>1672</u>	<u>869</u>	1666	872
450.soplex	127	2969	357	2944	360	<u>2955</u>	<u>358</u>	127	2969	357	2944	360	<u>2955</u>	<u>358</u>
453.povray	127	1297	521	<u>1293</u>	<u>523</u>	1292	523	63	394	851	<u>394</u>	<u>850</u>	394	850
454.calculix	127	1504	697	<u>1476</u>	<u>710</u>	1475	711	127	1420	738	<u>1416</u>	<u>740</u>	1414	741
459.GemsFDTD	127	3543	380	3609	373	<u>3601</u>	<u>374</u>	127	3543	380	3609	373	<u>3601</u>	<u>374</u>
465.tonto	127	2028	616	2033	615	<u>2029</u>	<u>616</u>	63	<u>884</u>	<u>701</u>	892	695	884	701
470.lbm	127	<u>3473</u>	<u>502</u>	3473	503	3474	502	127	3337	523	<u>3337</u>	<u>523</u>	3337	523
481.wrf	127	2144	662	2147	661	<u>2144</u>	<u>662</u>	127	<u>2116</u>	<u>670</u>	2025	700	2125	668
482.sphinx3	127	5576	444	5544	446	<u>5548</u>	<u>446</u>	127	4703	526	<u>4715</u>	<u>525</u>	4720	524

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Processes were bound to cores using "submit" and "pbind".

These shell commands request use of local 4MB pages:

MPSSHEAP=4MB

MPSSSTACK=4MB

MADV=access_lwp

LD_PRELOAD=mpss.so.1:adv.so.1

'access_lwp' means that the next light weight

process to touch the specified address range

will access it the most heavily.

Stack size set to unlimited via "ulimit -s unlimited"

System Tunables:

(/etc/system parameters)

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 600

Sun SPARC Enterprise M9000

SPECfp_rate_base2006 = 556

CPU2006 license: 6

Test date: May-2007

Test sponsor: Sun Microsystems

Hardware Availability: Apr-2007

Tested by: Fujitsu Limited

Software Availability: May-2007

Operating System Notes (Continued)

maxphys=4194304

Defines the maximum size of I/O requests, in bytes.

maxpgio=1024

Defines the maximum number of page I/O requests that can be queued by the paging system.

tune_t_fsflushr=30

Controls how many seconds elapse between runs of the page flush daemon, fsflush.

autoup=300

Causes pages older than the listed number of seconds to be written by fsflush.

bufhwm=3000

Memory byte limit for caching I/O buffers

segmap_percent=1

Set maximum percent memory for file system cache

Platform Notes

"CMU" = CPU/Memory Unit; each holds 2 or 4 CPU chips.

Memory is 8-way interleaved by filling all slots with the same capacity DIMMs.

This result is measured on a Fujitsu SPARC Enterprise M9000 Server. Note that the Fujitsu SPARC Enterprise M9000 and Sun SPARC Enterprise M9000 are electrically equivalent.

Base Compiler Invocation

C benchmarks:

/opt/SUNWspro12_EA070303/bin/cc

C++ benchmarks:

/opt/SUNWspro12_EA070303/bin/CC

Fortran benchmarks:

/opt/SUNWspro12_EA070303/bin/f90

Benchmarks using both Fortran and C:

/opt/SUNWspro12_EA070303/bin/cc /opt/SUNWspro12_EA070303/bin/f90



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 600

Sun SPARC Enterprise M9000

SPECfp_rate_base2006 = 556

CPU2006 license: 6

Test date: May-2007

Test sponsor: Sun Microsystems

Hardware Availability: Apr-2007

Tested by: Fujitsu Limited

Software Availability: May-2007

Base Optimization Flags

C benchmarks:

```
-fast -xipo=2 -xtarget=sparc64vi -xcache=128/64/2:6144/256/12
-xarch=sparcfmaf -fma=fused -Wc,-fma=fused -xprefetch_level=2
```

C++ benchmarks:

```
-library=stlport4 -fast -xipo=2 -xtarget=sparc64vi
-xcache=128/64/2:6144/256/12 -xarch=sparcfmaf -fma=fused
-Qoption cg -fma=fused
```

Fortran benchmarks:

```
-fast -xipo=2 -xtarget=sparc64vi -xcache=128/64/2:6144/256/12
-xarch=sparcfmaf -fma=fused -Qoption cg -fma=fused -xprefetch_level=2
```

Benchmarks using both Fortran and C:

```
-fast(cc) -fast(f90) -xipo=2 -xtarget=sparc64vi
-xcache=128/64/2:6144/256/12 -xarch=sparcfmaf -fma=fused
-Wc,-fma=fused -xprefetch_level=2 -Qoption cg -fma=fused
```

Peak Compiler Invocation

C benchmarks:

```
/opt/SUNWspr012_EA070303/bin/cc
```

C++ benchmarks:

```
/opt/SUNWspr012_EA070303/bin/CC
```

Fortran benchmarks:

```
/opt/SUNWspr012_EA070303/bin/f90
```

Benchmarks using both Fortran and C:

```
/opt/SUNWspr012_EA070303/bin/cc /opt/SUNWspr012_EA070303/bin/f90
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -fast -xipo=2 -xtarget=sparc64vi
-xcache=128/64/2:6144/256/12 -xarch=sparcfmaf -fma=fused
-Wc,-fma=fused -xalias_level=strong -xprefetch_level=2
-xprefetch_auto_type=indirect_array_access
```

```
470.lbm: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xtarget=sparc64vi -xcache=128/64/2:6144/256/12
-xarch=v8plusb -xprefetch_level=2 -fma=fused -Wc,-fma=fused
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 600

Sun SPARC Enterprise M9000

SPECfp_rate_base2006 = 556

CPU2006 license: 6

Test date: May-2007

Test sponsor: Sun Microsystems

Hardware Availability: Apr-2007

Tested by: Fujitsu Limited

Software Availability: May-2007

Peak Optimization Flags (Continued)

```
482.sphinx3: -xprofile=collect:./feedback(pass 1)
             -xprofile=use:./feedback(pass 2) -fast -xipo=2
             -xtarget=sparc64vi -xcache=128/64/2:6144/256/12
             -xarch=sparcfmaf -fma=fused -Wc,-fma=fused
```

C++ benchmarks:

```
444.namd: -library=stlport4 -xprofile=collect:./feedback(pass 1)
          -xprofile=use:./feedback(pass 2) -fast -xipo=2
          -xtarget=sparc64vi -xcache=128/64/2:6144/256/12
          -xarch=sparcfmaf -fma=fused -Qoption cg -fma=fused -xdepend
```

```
447.dealIII: -library=stlport4 -xprofile=collect:./feedback(pass 1)
             -xprofile=use:./feedback(pass 2) -fast -xipo=2
             -xtarget=sparc64vi -xcache=128/64/2:6144/256/12
             -xarch=sparcfmaf -fma=fused -Qoption cg -fma=fused -xdepend
             -xalias_level=compatible -xrestrict
```

450.soplex: basepeak = yes

```
453.povray: -library=stlport4 -xprofile=collect:./feedback(pass 1)
            -xprofile=use:./feedback(pass 2) -fast -xipo=2
            -xtarget=sparc64vi -xcache=128/64/2:6144/256/12
            -xarch=sparcfmaf -fma=fused -Qoption cg -fma=fused -xdepend
            -xalias_level=compatible
```

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

```
434.zeusmp: -fast -xipo=2 -xtarget=sparc64vi
            -xcache=128/64/2:6144/256/12 -xarch=sparcfmaf -fma=fused
            -Qoption cg -fma=fused -lmopt
```

```
437.leslie3d: -fast -xipo=2 -xtarget=sparc64vi
              -xcache=128/64/2:6144/256/12 -xarch=sparcfmaf -fma=fused
              -Qoption cg -fma=fused -xprefetch_level=2
              -xprefetch=latx:8.0
```

459.GemsFDTD: basepeak = yes

```
465.tonto: -xprofile=collect:./feedback(pass 1)
           -xprofile=use:./feedback(pass 2) -fast -xipo=2
           -xtarget=sparc64vi -xcache=128/64/2:6144/256/12
           -xarch=v8plusa -fma=fused -Qoption cg -fma=fused -lfast
```

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 600

Sun SPARC Enterprise M9000

SPECfp_rate_base2006 = 556

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Fujitsu Limited

Test date: May-2007

Hardware Availability: Apr-2007

Software Availability: May-2007

Peak Optimization Flags (Continued)

```
435.gromacs: -xprofile=collect:./feedback(pass 1)
             -xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
             -xipo=2 -xtarget=sparc64vi -xcache=128/64/2:6144/256/12
             -xarch=sparcfmaf -fma=fused -Wc,-fma=fused
             -Qoption cg -fma=fused
```

```
436.cactusADM: -fast(cc) -fast(f90) -xipo=2 -xtarget=sparc64vi
               -xcache=128/64/2:6144/256/12 -xarch=sparcfmaf -fma=fused
               -Wc,-fma=fused -Qoption cg -fma=fused
```

454.calculix: Same as 436.cactusADM

```
481.wrf: -xprofile=collect:./feedback(pass 1)
          -xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
          -xipo=2 -xtarget=sparc64vi -xcache=128/64/2:6144/256/12
          -xarch=sparcfmaf -fma=fused -Wc,-fma=fused
          -Qoption cg -fma=fused -xprefetch_level=2
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12.20090714.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12.20090714.02.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 11:44:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 May 2007.