



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®2006 = 21.6

IBM System p 570 (4.7 GHz, 1 core)

SPECint_base2006 = 17.8

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2007

Hardware Availability: Jun-2007

Software Availability: Jun-2007

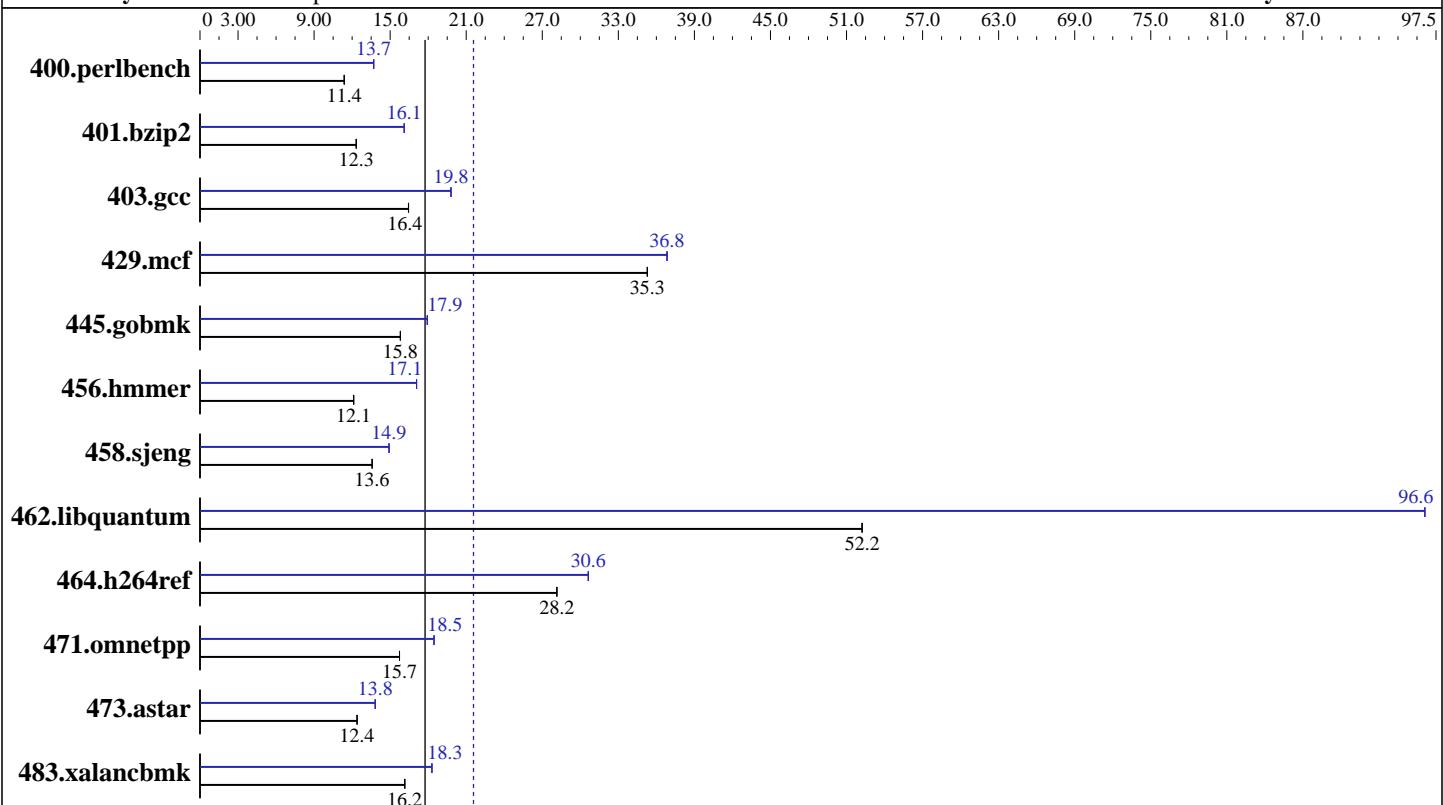

Hardware		Software	
CPU Name:	POWER6	Operating System:	IBM AIX 5L V5.3
CPU Characteristics:		Compiler:	XL C/C++ Enterprise Edition Version 9.0 for AIX
CPU MHz:	4700	Auto Parallel:	No
FPU:	Integrated	File System:	AIX/JFS2
CPU(s) enabled:	1 core, 1 chip, 2 cores/chip	System State:	Multi-user
CPU(s) orderable:	2,4,8,12,16 cores	Base Pointers:	32-bit
Primary Cache:	64 KB I + 64 KB D on chip per core	Peak Pointers:	32/64-bit
Secondary Cache:	4 MB I+D on chip per core	Other Software:	--
L3 Cache:	32 MB I+D off chip per chip		
Other Cache:	None		
Memory:	16 GB (8x2 GB) DDR2 667 MHz		
Disk Subsystem:	1x73 GB 1x146 GB SAS 15K RPM		
Other Hardware:	None		



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 21.6

IBM System p 570 (4.7 GHz, 1 core)

SPECint_base2006 = 17.8

CPU2006 license: 11

Test date: May-2007

Test sponsor: IBM Corporation

Hardware Availability: Jun-2007

Tested by: IBM Corporation

Software Availability: Jun-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
400.perlbench	859	11.4	859	11.4	858	11.4	713	13.7	713	13.7	712	13.7
401.bzip2	783	12.3	783	12.3	783	12.3	599	16.1	599	16.1	599	16.1
403.gcc	490	16.4	489	16.4	489	16.5	407	19.8	407	19.8	407	19.8
429.mcf	258	35.3	258	35.3	258	35.3	248	36.8	247	36.9	248	36.8
445.gobmk	664	15.8	664	15.8	664	15.8	585	17.9	585	17.9	585	17.9
456.hammer	770	12.1	770	12.1	770	12.1	546	17.1	546	17.1	546	17.1
458.sjeng	891	13.6	891	13.6	891	13.6	811	14.9	811	14.9	811	14.9
462.libquantum	397	52.2	397	52.2	397	52.2	214	96.6	214	96.6	214	96.6
464.h264ref	786	28.1	786	28.2	786	28.2	722	30.6	723	30.6	723	30.6
471.omnetpp	397	15.7	397	15.7	397	15.7	338	18.5	339	18.5	339	18.5
473.astar	567	12.4	566	12.4	567	12.4	508	13.8	508	13.8	508	13.8
483.xalancbmk	427	16.2	427	16.2	427	16.2	377	18.3	377	18.3	377	18.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

AIX 5L V5.3 updated with the 5300-06 Technology Level.

See flags file for details on following settings.

all ulimits set to unlimited

Environment variables set before executing benchmarks:

```
MALLOCOPTIONS=pool
MEMORY_AFFINITY=MCM
XLFRTEOPTS=intinthds=1
```

System set to "Enhanced" mode when defining partition on HMC
System limited to 1 core by the HMC partition definition

768 pages of size 16M defined on systems with vmo command

fdpr binary optimization tool used for peak versions of

401.bzip2 403.gcc 429.mcf 456.hammer 462.libquantum 473.astar

submit used to bind benchmark to a processor using "bindprocessor"

The "IBM System p 570" and "IBM System i 570" are electronically equivalent.

The results have been measured on the "IBM System p 570" model.

Base Compiler Invocation

C benchmarks:

```
/usr/vac/bin/xlc -qlanglvl=extc99
```

C++ benchmarks:

```
/usr/vacpp/bin/xlc
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 21.6

IBM System p 570 (4.7 GHz, 1 core)

SPECint_base2006 = 17.8

CPU2006 license: 11

Test date: May-2007

Test sponsor: IBM Corporation

Hardware Availability: Jun-2007

Tested by: IBM Corporation

Software Availability: Jun-2007

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_AIX  
462.libquantum: -DSPEC_CPU_AIX  
    464.h264ref: -DSPEC_CPU_AIX -qchars=signed  
483.xalancbmk: -DSPEC_CPU_AIX
```

Base Optimization Flags

C benchmarks:

```
-bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qalias=noansi  
-qalloc -blpdata
```

C++ benchmarks:

```
-bmaxdata:0x20000000 -O5 -qlargepage -D_ILS_MACROS -qrtti=all  
-blpdata
```

Base Other Flags

C benchmarks:

```
-qipa=noobject -qipa=threads -qsuppress=1500-036
```

C++ benchmarks:

```
-qipa=noobject -qipa=threads -qsuppress=1500-036
```

Peak Compiler Invocation

C benchmarks:

```
/usr/vac/bin/xlc -qlanglvl=extc99
```

C++ benchmarks:

```
/usr/vacpp/bin/xlc
```

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_AIX  
403.gcc: -DSPEC_CPU_LP64  
462.libquantum: -DSPEC_CPU_AIX  
    464.h264ref: -DSPEC_CPU_AIX -qchars=signed  
483.xalancbmk: -DSPEC_CPU_AIX
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	SPECint2006 =	21.6
IBM System p 570 (4.7 GHz, 1 core)	SPECint_base2006 =	17.8
CPU2006 license: 11	Test date:	May-2007
Test sponsor: IBM Corporation	Hardware Availability:	Jun-2007
Tested by: IBM Corporation	Software Availability:	Jun-2007

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
               -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS
               -qalias=noansi -blpdata

401.bzip2: -bmaxdata:0x4fffffff -qpdf1(pass 1) -qpdf2(pass 2) -O5
               -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS -blpdata

403.gcc: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage
               -D_ILS_MACROS -qalloca -q64 -blpdata

429.mcf: -bmaxdata:0x50000000 -O5 -qlargepage -qenablevmx
               -qvecnvol -D_ILS_MACROS -blpdata

445.gobmk: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx
               -qvecnvol -D_ILS_MACROS -blpdata

456.hmmr: -O5 -qlargepage -D_ILS_MACROS -blpdata

458.sjeng: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qlargepage -qenablevmx
               -qvecnvol -D_ILS_MACROS -blpdata

462.libquantum: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx
               -qvecnvol -D_ILS_MACROS -q64 -blpdata

464.h264ref: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage
               -D_ILS_MACROS -blpdata
```

C++ benchmarks:

```
471.omnetpp: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
               -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS
               -qalign=natural -qrtti=all -qinlglue -blpdata

473.astar: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
               -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS -blpdata

483.xalancbmk: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
               -qlargepage -D_ILS_MACROS -qinlglue -D__IBM_FAST_VECTOR
               -blpdata
```

Peak Other Flags

C benchmarks:

```
-qipa=noobject -qipa=threads -qsuppress=1500-036
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 21.6

IBM System p 570 (4.7 GHz, 1 core)

SPECint_base2006 = 17.8

CPU2006 license: 11

Test date: May-2007

Test sponsor: IBM Corporation

Hardware Availability: Jun-2007

Tested by: IBM Corporation

Software Availability: Jun-2007

Peak Other Flags (Continued)

C++ benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 10:59:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 June 2007.