



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®_rate2006 = 213

IBM System p 570 (4.7 GHz, 8 core)

SPECfp_rate_base2006 = 189

CPU2006 license: 11


Test date: May-2007

Test sponsor: IBM Corporation

Hardware Availability: Jun-2007

Tested by: IBM Corporation

Software Availability: Jun-2007

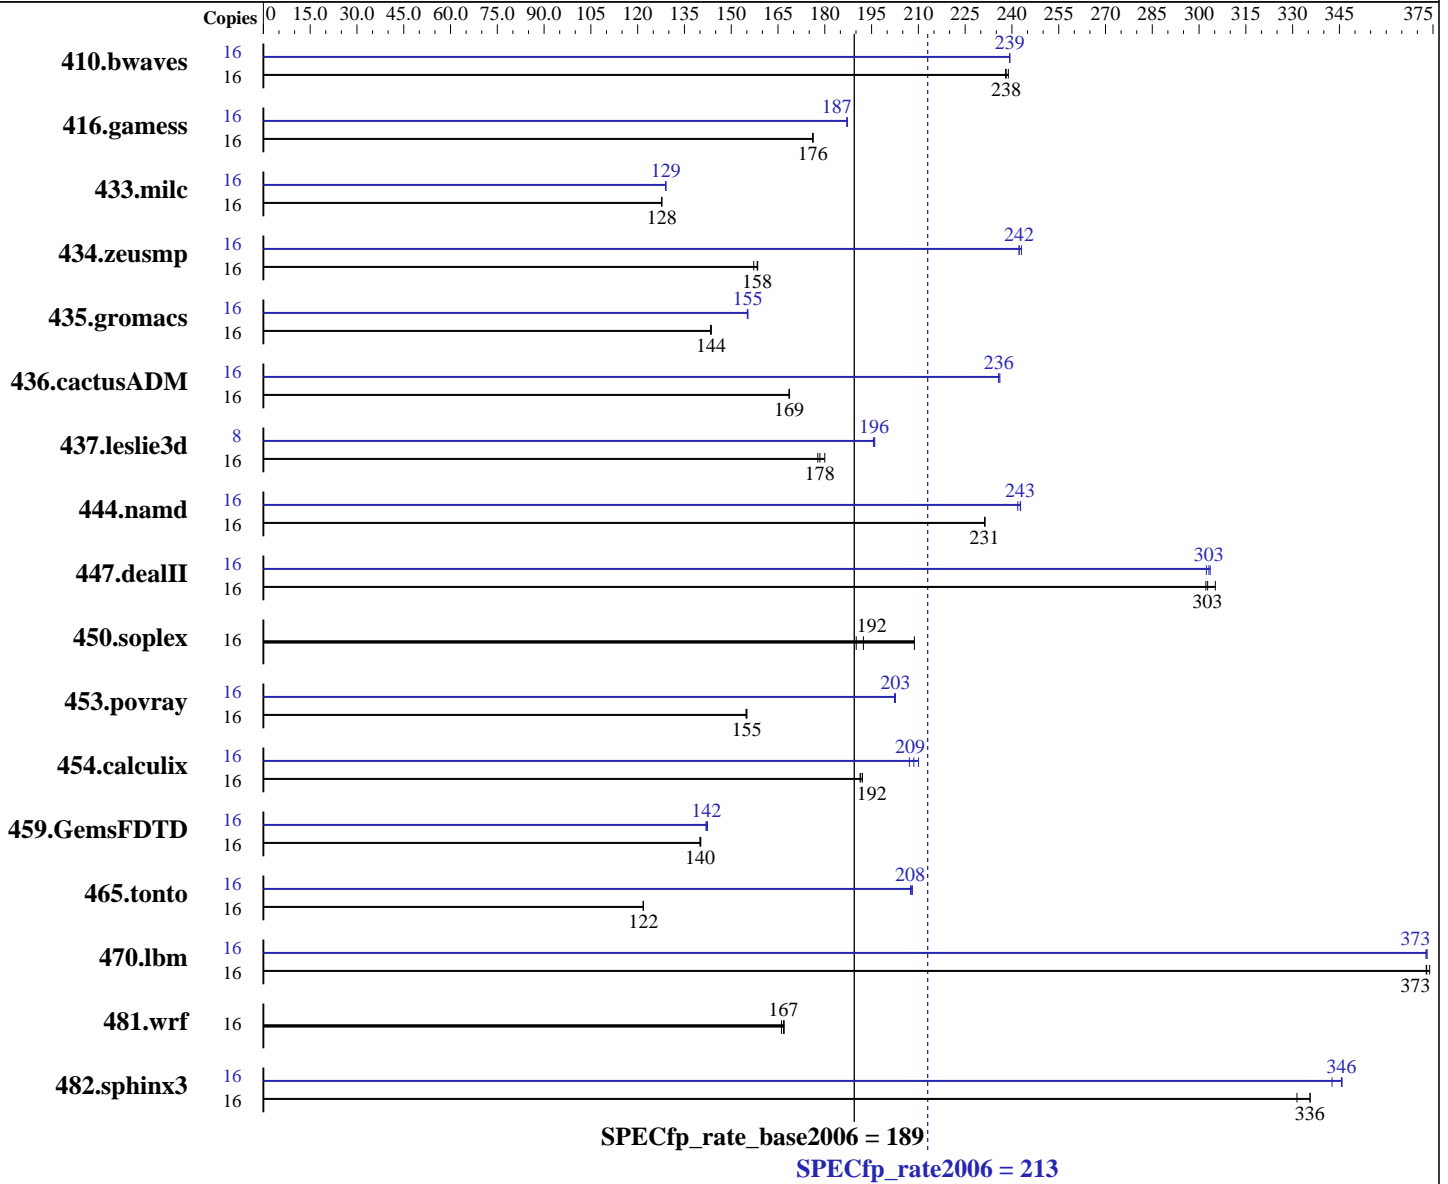

Hardware

CPU Name: POWER6
 CPU Characteristics:
 CPU MHz: 4700
 FPU: Integrated
 CPU(s) enabled: 8 cores, 4 chips, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4,8,12,16 cores
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per core

Software

Operating System: IBM AIX 5L V5.3
 Compiler: XL C/C++ Enterprise Edition Version 9.0 for AIX
 XL Fortran Enterprise Edition Version 11.1 for AIX
 Auto Parallel: No
 File System: AIX/JFS2
 System State: Multi-user
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: --

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 213

IBM System p 570 (4.7 GHz, 8 core)

SPECfp_rate_base2006 = 189

CPU2006 license: 11

Test date: May-2007

Test sponsor: IBM Corporation

Hardware Availability: Jun-2007

Tested by: IBM Corporation

Software Availability: Jun-2007

L3 Cache: 32 MB I+D off chip per chip
Other Cache: None
Memory: 64 GB (32x2 GB) DDR2 667 MHz
Disk Subsystem: 2x73 GB 2x146 GB SAS 15K RPM
Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	910	239	914	238	913	238	16	909	239	909	239	909	239
416.gamess	16	1778	176	1779	176	1777	176	16	1673	187	1674	187	1675	187
433.milc	16	1151	128	1150	128	1150	128	16	1138	129	1138	129	1139	129
434.zeusmp	16	926	157	920	158	919	158	16	601	242	599	243	601	242
435.gromacs	16	797	143	796	144	796	144	16	736	155	736	155	736	155
436.cactusADM	16	1134	169	1133	169	1134	169	16	811	236	810	236	811	236
437.leslie3d	16	836	180	843	178	846	178	8	384	196	384	196	384	196
444.namd	16	555	231	555	231	555	231	16	531	242	529	243	529	243
447.dealII	16	600	305	606	302	605	303	16	604	303	603	304	605	302
450.soplex	16	694	192	702	190	639	209	16	694	192	702	190	639	209
453.povray	16	550	155	549	155	549	155	16	421	202	420	203	420	203
454.calculix	16	690	191	687	192	689	192	16	628	210	633	209	637	207
459.GemsFDTD	16	1212	140	1210	140	1213	140	16	1196	142	1192	142	1195	142
465.tonto	16	1292	122	1292	122	1292	122	16	759	207	757	208	757	208
470.lbm	16	590	373	588	374	589	373	16	589	373	590	373	589	373
481.wrf	16	1076	166	1072	167	1070	167	16	1076	166	1072	167	1070	167
482.sphinx3	16	941	331	929	336	929	336	16	910	343	902	346	902	346

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

AIX 5L V5.3 updated with the 5300-06 Technology Level.

See flags file for details on following settings.

all ulimits set to unlimited

Environment variables set before executing benchmarks:

MALLOCOPTIONS=pool

MEMORY_AFFINITY=MCM

XLFRTIOPTS=intrinthds=1

System set to "Enhanced" mode when defining partition on HMC

3072 pages of size 16M defined on systems with vmo command

fdpr binary optimization tool used for peak versions of

410.bwaves 434.zeusmp 453.povray 470.lbm 482.sphinx3

submit used to bind benchmark to a processor using "bindprocessor"

The "IBM System p 570" and "IBM System i 570" are electronically equivalent.

The results have been measured on the "IBM System p 570" model.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 213

IBM System p 570 (4.7 GHz, 8 core)

SPECfp_rate_base2006 = 189

CPU2006 license: 11

Test date: May-2007

Test sponsor: IBM Corporation

Hardware Availability: Jun-2007

Tested by: IBM Corporation

Software Availability: Jun-2007

Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

Base Portability Flags

410.bwaves: -qfixed

416.gamess: -qfixed

434.zeusmp: -qfixed

435.gromacs: -qfixed -qextname

436.cactusADM: -qfixed -qextname

437.leslie3d: -qfixed

454.calculix: -qfixed -qextname

481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE

482.sphinx3: -qchars=signed

Base Optimization Flags

C benchmarks:

-bmaxdata:0x40000000 -O5 -qlargepage -D_ILS_MACROS -blpdata

C++ benchmarks:

-bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qrtti=all

-D__IBM_FAST_VECTOR -blpdata

Fortran benchmarks:

-bmaxdata:0x60000000 -O5 -qlargepage -qsmallstack=dynlenonheap

-qalias=nostd -blpdata

Benchmarks using both Fortran and C:

-bmaxdata:0x60000000 -O5 -qlargepage -D_ILS_MACROS

-qsmallstack=dynlenonheap -qalias=nostd -blpdata



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 213

IBM System p 570 (4.7 GHz, 8 core)

SPECfp_rate_base2006 = 189

CPU2006 license: 11

Test date: May-2007

Test sponsor: IBM Corporation

Hardware Availability: Jun-2007

Tested by: IBM Corporation

Software Availability: Jun-2007

Base Other Flags

C benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

Fortran benchmarks:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036

Benchmarks using both Fortran and C:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036

Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

Peak Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
482.sphinx3: -qchars=signed

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 213

IBM System p 570 (4.7 GHz, 8 core)

SPECfp_rate_base2006 = 189

CPU2006 license: 11

Test date: May-2007

Test sponsor: IBM Corporation

Hardware Availability: Jun-2007

Tested by: IBM Corporation

Software Availability: Jun-2007

Peak Optimization Flags (Continued)

433.milc: -bmaxdata:0x40000000 -O5 -qlargepage -D_ILS_MACROS
-qalign=natural -blpdata

470.lbm: -O5 -qlargepage -D_ILS_MACROS -q64 -blpdata

482.sphinx3: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx
-qvecnv1 -D_ILS_MACROS -blpdata

C++ benchmarks:

444.namd: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx
-qvecnv1 -D_ILS_MACROS -blpdata

447.dealIII: -bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS
-qrtti=all -D__IBM_FAST_VECTOR -blpdata

450.soplex: basepeak = yes

453.povray: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx
-qvecnv1 -D_ILS_MACROS -qalign=natural -blpdata

Fortran benchmarks:

410.bwaves: -bmaxdata:0x50000000 -O5 -qlargepage -qenablevmx -qvecnv1
-qsmallstack=dynlenonheap -blpdata

416.gamess: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -qalias=nostd -blpdata

434.zeusmp: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -qenablevmx -qvecnv1 -qxlf90=nosignedzero
-blpdata

437.leslie3d: -O5 -qlargepage -q64 -blpdata

459.GemsFDTD: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -qenablevmx -qvecnv1 -blpdata

465.tonto: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -blpdata

Benchmarks using both Fortran and C:

435.gromacs: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx
-qvecnv1 -D_ILS_MACROS -blpdata

436.cactusADM: -bmaxdata:0x60000000 -D_ILS_MACROS -blpdata

454.calculix: -O4 -qlargepage -q64 -D_ILS_MACROS -blpdata

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 213

IBM System p 570 (4.7 GHz, 8 core)

SPECfp_rate_base2006 = 189

CPU2006 license: 11

Test date: May-2007

Test sponsor: IBM Corporation

Hardware Availability: Jun-2007

Tested by: IBM Corporation

Software Availability: Jun-2007

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

Peak Other Flags

C benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

Fortran benchmarks:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036

Benchmarks using both Fortran and C:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 11:09:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 June 2007.