



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro Motherboard X7DB3

**SPECint®2006 = 16.4**  
**SPECint\_base2006 = 15.7**

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2007

Hardware Availability: May-2007

Software Availability: Apr-2007

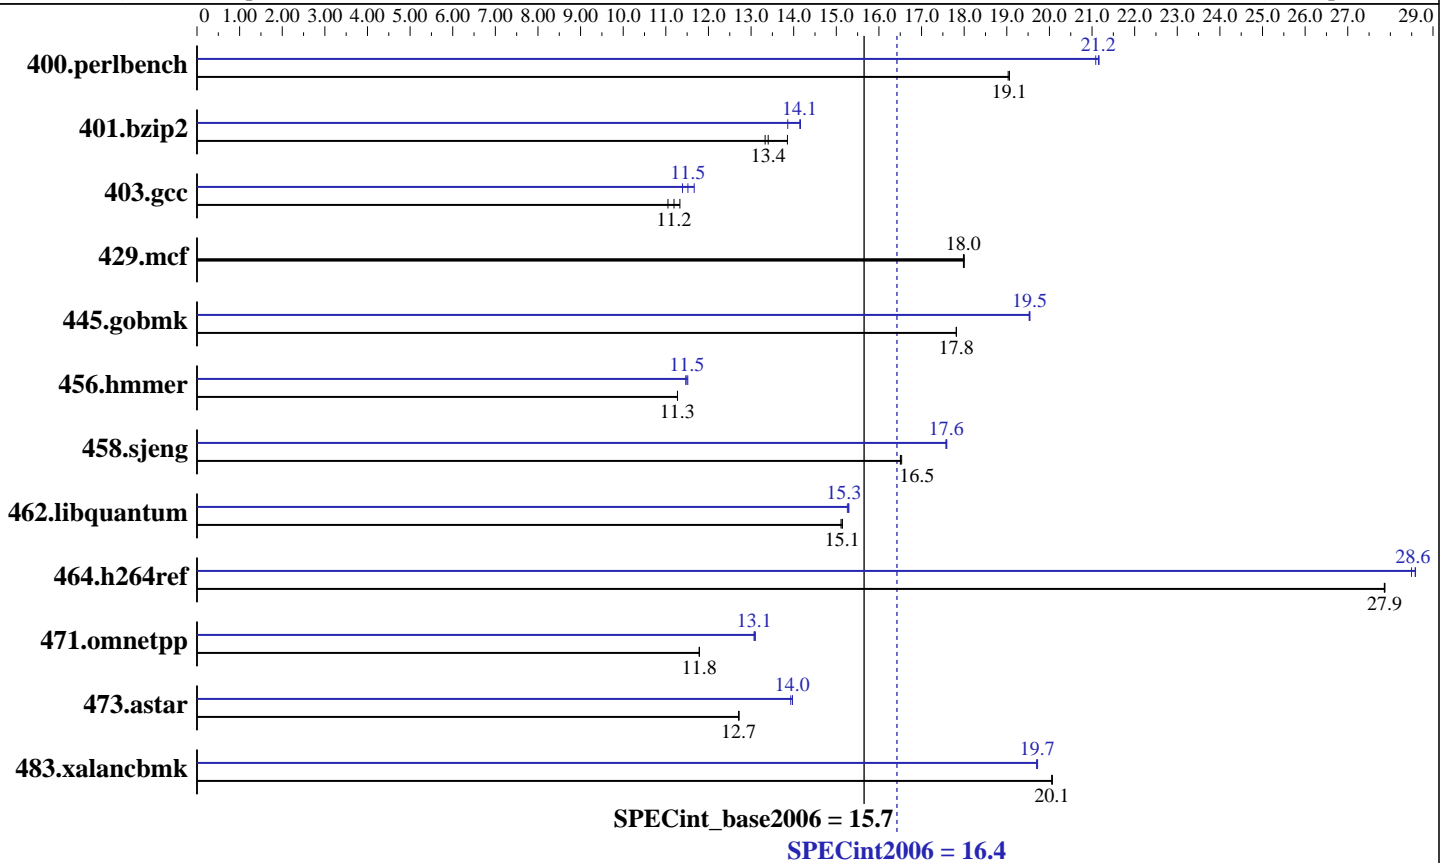

### Hardware

CPU Name: Intel Xeon X5355  
 CPU Characteristics: 2.66GHz, 1333 MHz bus  
 CPU MHz: 2660  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1, 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 8 GB (8 X 1GB ECC PC2-5300, CL5, FBDIMM)  
 Disk Subsystem: WD2500YS-01SHB1 250GB SATA II, 7200RPM, 4 \* ST316081 160GB SATA RAID-10  
 Other Hardware: None

### Software

Operating System: Windows Server 2003 Enterprise Edition W/ SP1  
 Compiler: Intel C++ Compiler for IA32 version 9.1  
 Build no 20070322Z  
 Microsoft Visual Studio .Net 2003 (for libraries)  
 Auto Parallel: No  
 File System: NTFS  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: SmartHeap Library Version 8.0 from <http://www.microquill.com/>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro  
Motherboard X7DB3

SPECint2006 = 16.4  
SPECint\_base2006 = 15.7

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Apr-2007  
Hardware Availability: May-2007  
Software Availability: Apr-2007

## Results Table

| Benchmark      | Base        |             |            |             |            |             | Peak        |             |            |             |            |             |
|----------------|-------------|-------------|------------|-------------|------------|-------------|-------------|-------------|------------|-------------|------------|-------------|
|                | Seconds     | Ratio       | Seconds    | Ratio       | Seconds    | Ratio       | Seconds     | Ratio       | Seconds    | Ratio       | Seconds    | Ratio       |
| 400.perlbench  | 513         | 19.0        | 513        | 19.1        | <u>513</u> | <u>19.1</u> | <u>462</u>  | <u>21.2</u> | 463        | 21.1        | 462        | 21.2        |
| 401.bzip2      | <u>720</u>  | <u>13.4</u> | 724        | 13.3        | 697        | 13.9        | <u>682</u>  | <u>14.1</u> | 696        | 13.9        | 682        | 14.2        |
| 403.gcc        | <u>719</u>  | <u>11.2</u> | 711        | 11.3        | 728        | 11.1        | 690         | 11.7        | <u>699</u> | <u>11.5</u> | 707        | 11.4        |
| 429.mcf        | 507         | 18.0        | <u>507</u> | <u>18.0</u> | 507        | 18.0        | 507         | 18.0        | <u>507</u> | <u>18.0</u> | 507        | 18.0        |
| 445.gobmk      | 589         | 17.8        | 589        | 17.8        | <u>589</u> | <u>17.8</u> | <u>537</u>  | <u>19.5</u> | 537        | 19.5        | 537        | 19.5        |
| 456.hammer     | 828         | 11.3        | 828        | 11.3        | <u>828</u> | <u>11.3</u> | <u>812</u>  | <u>11.5</u> | 814        | 11.5        | 810        | 11.5        |
| 458.sjeng      | <u>733</u>  | <u>16.5</u> | 733        | 16.5        | 732        | 16.5        | <u>688</u>  | <u>17.6</u> | 688        | 17.6        | 689        | 17.6        |
| 462.libquantum | <u>1369</u> | <u>15.1</u> | 1368       | 15.1        | 1371       | 15.1        | <u>1355</u> | <u>15.3</u> | 1358       | 15.3        | 1355       | 15.3        |
| 464.h264ref    | 794         | 27.9        | <u>794</u> | <u>27.9</u> | 794        | 27.9        | <u>774</u>  | <u>28.6</u> | 777        | 28.5        | 774        | 28.6        |
| 471.omnetpp    | <u>530</u>  | <u>11.8</u> | 530        | 11.8        | 530        | 11.8        | 477         | 13.1        | 478        | 13.1        | <u>478</u> | <u>13.1</u> |
| 473.astar      | 552         | 12.7        | <u>552</u> | <u>12.7</u> | 552        | 12.7        | 502         | 14.0        | <u>502</u> | <u>14.0</u> | 504        | 13.9        |
| 483.xalancbmk  | 344         | 20.1        | <u>344</u> | <u>20.1</u> | 344        | 20.1        | 350         | 19.7        | <u>350</u> | <u>19.7</u> | 350        | 19.7        |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

Tested systems can be used with CSE-825TQ-R700LPV case,  
To ensure system stability, a 500W (minimum) ATX power supply [4-pin (+12V), 8-pin (+12V) and 24-pin are required]  
Product description located as of <http://www.supermicro.com/products/motherboard/Xeon1333/5000P/X7DB3.cfm>  
The system bus runs at 1333 MHz

## Base Compiler Invocation

C benchmarks:  
icl -Qvc7.1 -Qc99  
  
C++ benchmarks:  
icl -Qvc7.1

## Base Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32

## Base Optimization Flags

C benchmarks:  
-fast /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro  
Motherboard X7DB3**

**SPECint2006 = 16.4**  
**SPECint\_base2006 = 15.7**

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Apr-2007  
**Hardware Availability:** May-2007  
**Software Availability:** Apr-2007

## Base Optimization Flags (Continued)

C++ benchmarks:  
-fast -Qcxx\_features /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks:  
icl -Qvc7.1 -Qc99  
C++ benchmarks:  
icl -Qvc7.1

## Peak Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32

## Peak Optimization Flags

C benchmarks:  
400.perlbench: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast /F512000000  
shlw32m.lib -link /FORCE:MULTIPLE  
401.bzip2: Same as 400.perlbench  
403.gcc: Same as 400.perlbench  
429.mcf: basepeak = yes  
445.gobmk: Same as 400.perlbench  
456.hmmmer: Same as 400.perlbench  
458.sjeng: Same as 400.perlbench

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro  
Motherboard X7DB3**

**SPECint2006 = 16.4**  
**SPECint\_base2006 = 15.7**

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Apr-2007  
**Hardware Availability:** May-2007  
**Software Availability:** Apr-2007

## Peak Optimization Flags (Continued)

462.libquantum: Same as 400.perlbench

464.h264ref: Same as 400.perlbench

C++ benchmarks:

471.omnetpp: `-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx_features  
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE`

473.astar: `-Qprof_gen(pass 1) -Qprof_use(pass 2) -QxP -O2 -Qipo  
-Qprec-div- -Qunroll14 -Ob2 -Qsfa16 -Qcxx_features  
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE`

483.xalancbmk: Same as 471.omnetpp

## Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic91-ia32-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic91-ia32-flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 11:22:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 26 June 2007.