



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

PRIMERGY TX300 S3, Intel Xeon processor X5355,  
2.66 GHz

SPECfp®\_rate2006 = 37.5

SPECfp\_rate\_base2006 = 36.2

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: May-2007

Hardware Availability: Jan-2007

Software Availability: Mar-2007

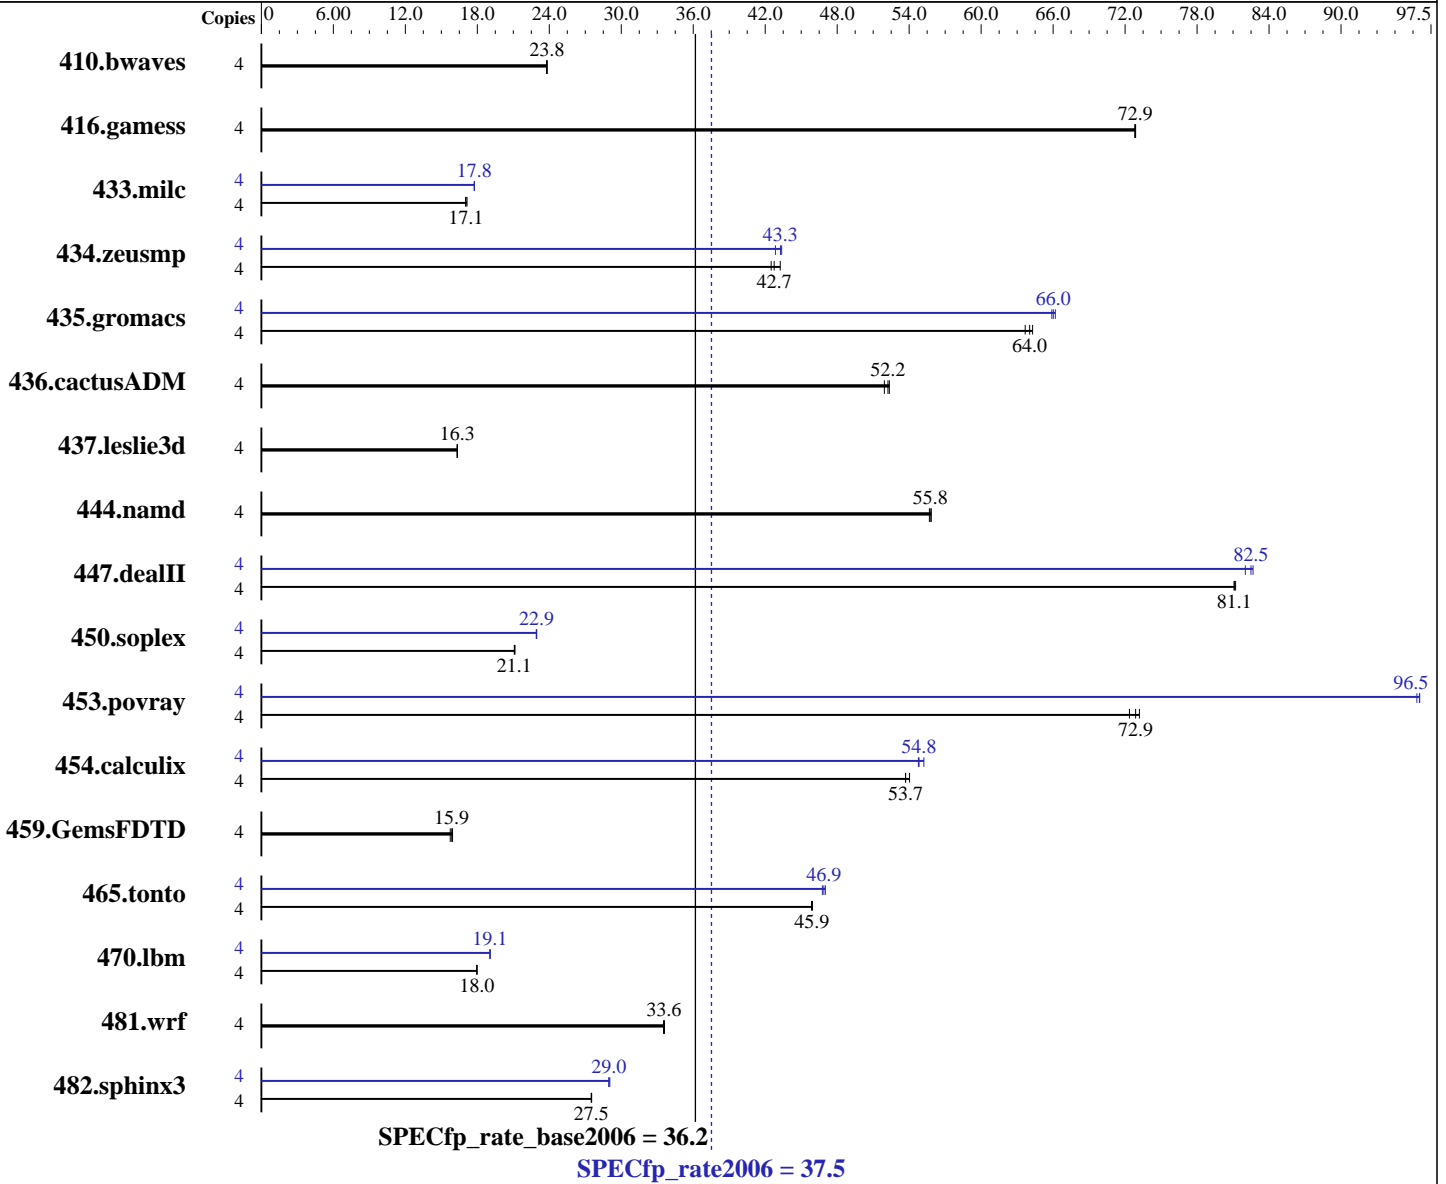

### Hardware

CPU Name: Intel Xeon X5355  
 CPU Characteristics: 1333 MHz system bus  
 CPU MHz: 2667  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

### Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 10, Kernel 2.6.16.21-0.8-smp on an x86\_64  
 Compiler: Intel C++ Compiler for IA32/EM64T application, Version 9.1 - Build 20070215, Package-ID: l\_cc\_p\_9.1.047  
 Intel Fortran Compiler for IA32/EM64T application, Version 9.1 - Build 20070215, Package-ID: l\_fc\_p\_9.1.043  
 Auto Parallel: No  
 File System: ext2

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

PRIMERGY TX300 S3, Intel Xeon processor X5355,  
2.66 GHz

SPECfp\_rate2006 = 37.5

SPECfp\_rate\_base2006 = 36.2

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: May-2007

Hardware Availability: Jan-2007

Software Availability: Mar-2007

L3 Cache: None  
Other Cache: None  
Memory: 8 GB (8x1 GB DDR2 PC2-5300F, 2 rank, CAS 5-5-5, with ECC)  
Disk Subsystem: SAS (73GB 15400 rpm)  
Other Hardware: None

System State: Multiuser, Runlevel 3  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	2282	23.8	2287	23.8	<b>2283</b>	<b>23.8</b>	4	2282	23.8	2287	23.8	<b>2283</b>	<b>23.8</b>
416.gamess	4	1076	72.8	1075	72.9	<b>1075</b>	<b>72.9</b>	4	1076	72.8	1075	72.9	<b>1075</b>	<b>72.9</b>
433.milc	4	2142	17.1	2156	17.0	<b>2153</b>	<b>17.1</b>	4	2068	17.8	2069	17.8	<b>2068</b>	<b>17.8</b>
434.zeusmp	4	842	43.3	<b>852</b>	<b>42.7</b>	857	42.5	4	849	42.9	<b>841</b>	<b>43.3</b>	839	43.4
435.gromacs	4	444	64.3	<b>446</b>	<b>64.0</b>	449	63.7	4	432	66.2	433	65.9	<b>433</b>	<b>66.0</b>
436.cactusADM	4	920	51.9	913	52.3	<b>915</b>	<b>52.2</b>	4	920	51.9	913	52.3	<b>915</b>	<b>52.2</b>
437.leslie3d	4	<b>2303</b>	<b>16.3</b>	2300	16.3	2304	16.3	4	<b>2303</b>	<b>16.3</b>	2300	16.3	2304	16.3
444.namd	4	<b>575</b>	<b>55.8</b>	574	55.8	576	55.7	4	<b>575</b>	<b>55.8</b>	574	55.8	576	55.7
447.dealII	4	<b>564</b>	<b>81.1</b>	563	81.2	564	81.1	4	558	82.0	554	82.7	<b>555</b>	<b>82.5</b>
450.soplex	4	1578	21.1	<b>1581</b>	<b>21.1</b>	1582	21.1	4	1454	22.9	<b>1454</b>	<b>22.9</b>	1456	22.9
453.povray	4	291	73.2	<b>292</b>	<b>72.9</b>	294	72.4	4	221	96.3	220	96.6	<b>220</b>	<b>96.5</b>
454.calculix	4	615	53.7	<b>614</b>	<b>53.7</b>	611	54.0	4	603	54.8	598	55.2	<b>602</b>	<b>54.8</b>
459.GemsFDTD	4	2663	15.9	2696	15.7	<b>2674</b>	<b>15.9</b>	4	2663	15.9	2696	15.7	<b>2674</b>	<b>15.9</b>
465.tonto	4	857	45.9	858	45.9	<b>857</b>	<b>45.9</b>	4	837	47.0	842	46.8	<b>839</b>	<b>46.9</b>
470.lbm	4	<b>3059</b>	<b>18.0</b>	3060	18.0	3058	18.0	4	2883	19.1	<b>2884</b>	<b>19.1</b>	2884	19.1
481.wrf	4	1330	33.6	<b>1331</b>	<b>33.6</b>	1333	33.5	4	1330	33.6	<b>1331</b>	<b>33.6</b>	1333	33.5
482.sphinx3	4	<b>2834</b>	<b>27.5</b>	2835	27.5	2832	27.5	4	2692	29.0	2684	29.0	<b>2691</b>	<b>29.0</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
'/usr/bin/taskset' used to bind processes to CPUs

## General Notes

The system bus runs at 1333 MHz

All binaries were built with 64-bit Intel compiler except:  
433.milc, 434.zeusmp, 450.soplex, 470.lbm and 482.sphinx3 in peak were built with  
32-bit Intel compiler by changing the path for include and library files.

This result was measured on the PRIMERGY RX300 S3. The PRIMERGY RX300 S3 and

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu Siemens Computers**

PRIMERGY TX300 S3, Intel Xeon processor X5355,  
2.66 GHz

**SPECfp\_rate2006 = 37.5**

**SPECfp\_rate\_base2006 = 36.2**

**CPU2006 license:** 22

**Test sponsor:** Fujitsu Siemens Computers

**Tested by:** Fujitsu Siemens Computers

**Test date:** May-2007

**Hardware Availability:** Jan-2007

**Software Availability:** Mar-2007

## General Notes (Continued)

the PRIMERGY TX300 S3 are electronically equivalent.

For information about Fujitsu Siemens Computers in your country please see:  
<http://www.fujitsu-siemens.com/countries>

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-fast

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu Siemens Computers**

PRIMERGY TX300 S3, Intel Xeon processor X5355,  
2.66 GHz

**SPECfp\_rate2006 = 37.5**

**SPECfp\_rate\_base2006 = 36.2**

**CPU2006 license:** 22

**Test sponsor:** Fujitsu Siemens Computers

**Tested by:** Fujitsu Siemens Computers

**Test date:** May-2007

**Hardware Availability:** Jan-2007

**Software Availability:** Mar-2007

## Base Optimization Flags (Continued)

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast

## Peak Compiler Invocation

C benchmarks:

/opt/intel/cc/9.1.047/bin/icc -I/opt/intel/cc/9.1.047/include  
-L/opt/intel/cc/9.1.047/lib

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/cc/9.1.047/bin/icpc  
-I/opt/intel/cc/9.1.047/include -L/opt/intel/cc/9.1.047/lib

Fortran benchmarks (except as noted below):

ifort

434.zeusmp: /opt/intel/fc/9.1.043/bin/ifort  
-I/opt/intel/fc/9.1.043/include -L/opt/intel/fc/9.1.043/lib

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu Siemens Computers**

PRIMERGY TX300 S3, Intel Xeon processor X5355,  
2.66 GHz

**SPECfp\_rate2006 = 37.5**

**SPECfp\_rate\_base2006 = 36.2**

**CPU2006 license:** 22

**Test sponsor:** Fujitsu Siemens Computers

**Tested by:** Fujitsu Siemens Computers

**Test date:** May-2007

**Hardware Availability:** Jan-2007

**Software Availability:** Mar-2007

## Peak Optimization Flags

C benchmarks:

433.milc: -prof\_gen(pass 1) -prof\_use(pass 2) -fast

470.lbm: Same as 433.milc

482.sphinx3: -fast

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: -prof\_gen(pass 1) -prof\_use(pass 2) -fast

450.soplex: Same as 447.dealII

453.povray: Same as 447.dealII

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -prof\_gen(pass 1) -prof\_use(pass 2) -fast

Benchmarks using both Fortran and C:

435.gromacs: -prof\_gen(pass 1) -prof\_use(pass 2) -fast

436.cactusADM: basepeak = yes

454.calculix: Same as 435.gromacs

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.09.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.09.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.09.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.09.xml)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

PRIMERGY TX300 S3, Intel Xeon processor X5355,  
2.66 GHz

SPECfp\_rate2006 = 37.5

SPECfp\_rate\_base2006 = 36.2

**CPU2006 license:** 22

**Test sponsor:** Fujitsu Siemens Computers

**Tested by:** Fujitsu Siemens Computers

**Test date:** May-2007

**Hardware Availability:** Jan-2007

**Software Availability:** Mar-2007

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 11:24:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 26 June 2007.