



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

PRIMERGY RX600 S3, Intel Xeon processor 7120M, 3.0 GHz

SPECfp®\_rate2006 = 32.2

SPECfp\_rate\_base2006 = 31.7

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jun-2007

Hardware Availability: Aug-2006

Software Availability: Mar-2007

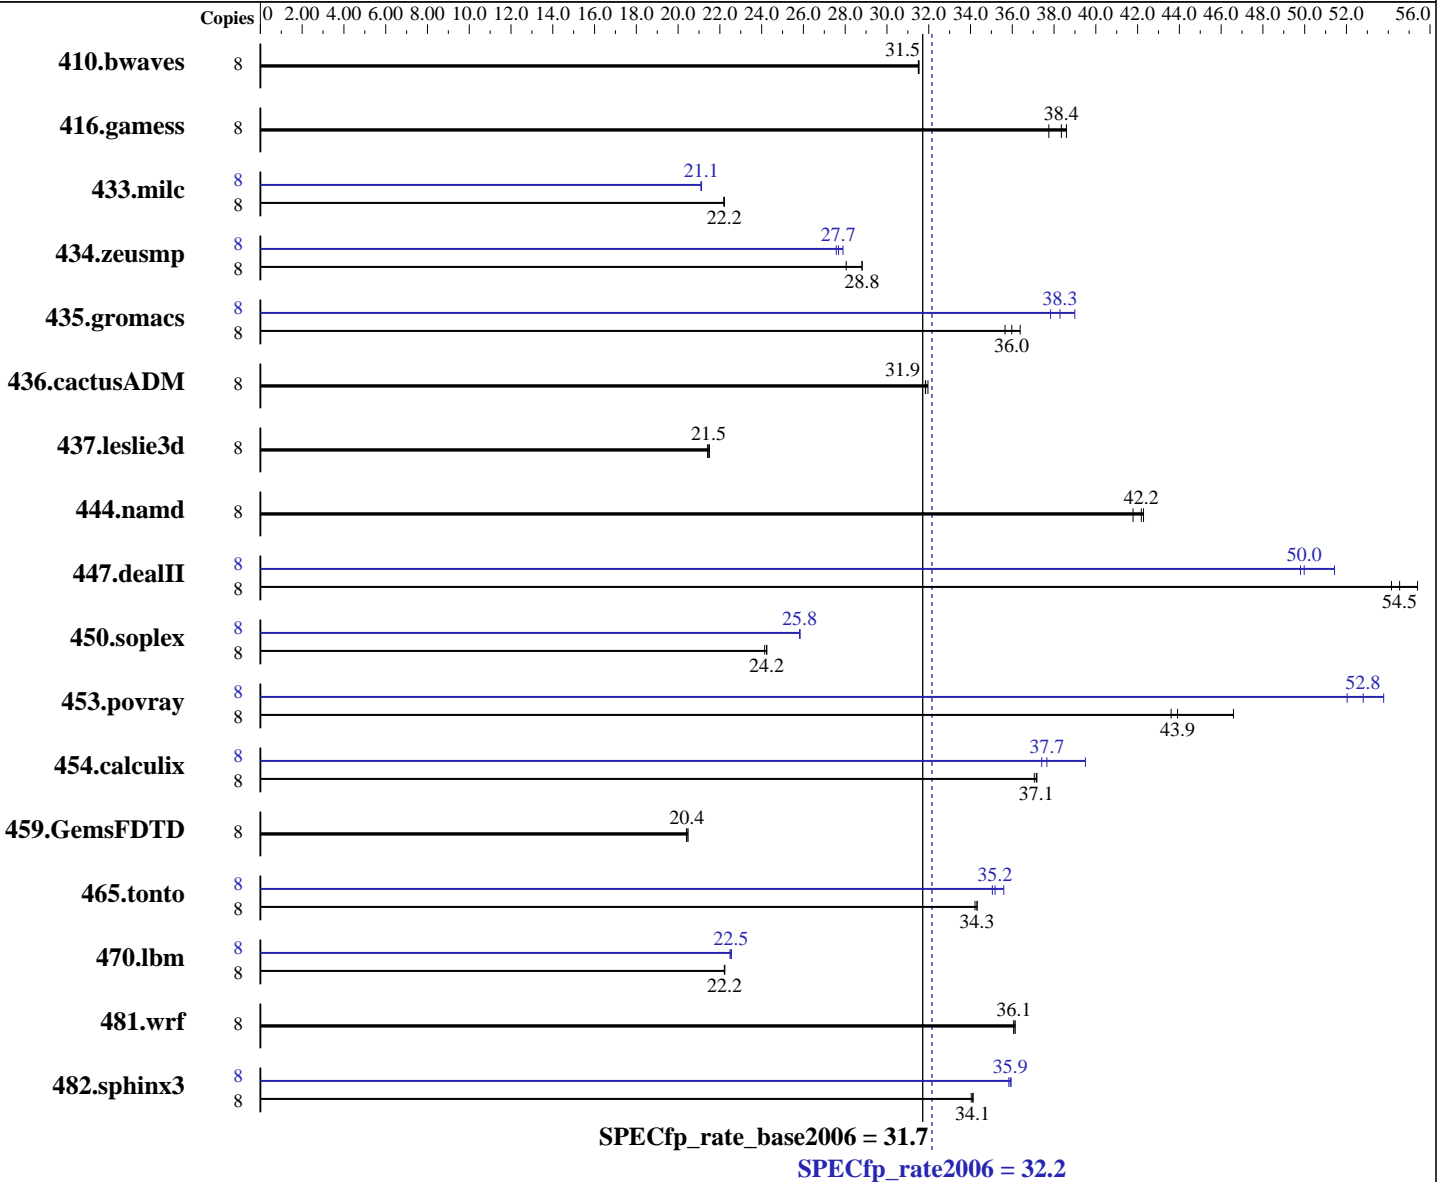

### Hardware

CPU Name: Intel Xeon 7120M  
 CPU Characteristics: 800 MHz system bus  
 CPU MHz: 3000  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2,4 chips  
 Primary Cache: 12 K micro-ops I + 16 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

### Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 10, Kernel 2.6.16.21-0.8-smp on an x86\_64  
 Compiler: Intel C++ Compiler for IA32/EM64T application, Version 9.1 - Build 20070215, Package-ID: l\_cc\_p\_9.1.047  
 Intel Fortran Compiler for IA32/EM64T application, Version 9.1 - Build 20070215, Package ID: l\_fc\_p\_9.1.043  
 Auto Parallel: No  
 File System: ReiserFS

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

PRIMERGY RX600 S3, Intel Xeon processor 7120M, 3.0 GHz

SPECfp\_rate2006 = 32.2

SPECfp\_rate\_base2006 = 31.7

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jun-2007

Hardware Availability: Aug-2006

Software Availability: Mar-2007

L3 Cache: 4 MB I+D on chip per chip  
Other Cache: None  
Memory: 32 GB (16x2 GB DDR2 PC2-3200R, 2 rank, CAS 3-3-3, with ECC)  
Disk Subsystem: Seagate ST973401SS (SAS 73GB 10 krpm)  
Other Hardware: None

System State: Multiuser Runlevel 3  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	8	3451	31.5	<b>3449</b>	<b>31.5</b>	3448	31.5	8	3451	31.5	<b>3449</b>	<b>31.5</b>	3448	31.5		
416.gamess	8	4149	37.8	4059	38.6	<b>4084</b>	<b>38.4</b>	8	4149	37.8	4059	38.6	<b>4084</b>	<b>38.4</b>		
433.milc	8	3305	22.2	<b>3305</b>	<b>22.2</b>	3310	22.2	8	3477	21.1	3481	21.1	<b>3479</b>	<b>21.1</b>		
434.zeusmp	8	<b>2527</b>	<b>28.8</b>	2595	28.0	2527	28.8	8	2610	27.9	<b>2630</b>	<b>27.7</b>	2640	27.6		
435.gromacs	8	1602	35.7	<b>1588</b>	<b>36.0</b>	1570	36.4	8	1510	37.8	<b>1492</b>	<b>38.3</b>	1465	39.0		
436.cactusADM	8	2991	32.0	<b>3001</b>	<b>31.9</b>	3002	31.8	8	2991	32.0	<b>3001</b>	<b>31.9</b>	3002	31.8		
437.leslie3d	8	3512	21.4	<b>3503</b>	<b>21.5</b>	3498	21.5	8	3512	21.4	<b>3503</b>	<b>21.5</b>	3498	21.5		
444.namd	8	<b>1521</b>	<b>42.2</b>	1517	42.3	1536	41.8	8	<b>1521</b>	<b>42.2</b>	1517	42.3	1536	41.8		
447.dealII	8	<b>1678</b>	<b>54.5</b>	1690	54.2	1652	55.4	8	1780	51.4	1838	49.8	<b>1831</b>	<b>50.0</b>		
450.soplex	8	2752	24.2	2763	24.1	<b>2753</b>	<b>24.2</b>	8	<b>2583</b>	<b>25.8</b>	2584	25.8	2583	25.8		
453.povray	8	976	43.6	913	46.6	<b>969</b>	<b>43.9</b>	8	<b>806</b>	<b>52.8</b>	791	53.8	818	52.0		
454.calculix	8	1781	37.1	<b>1777</b>	<b>37.1</b>	1775	37.2	8	<b>1753</b>	<b>37.7</b>	1671	39.5	1764	37.4		
459.GemsFDTD	8	4161	20.4	<b>4155</b>	<b>20.4</b>	4145	20.5	8	4161	20.4	<b>4155</b>	<b>20.4</b>	4145	20.5		
465.tonto	8	2301	34.2	<b>2294</b>	<b>34.3</b>	2294	34.3	8	2212	35.6	2246	35.0	<b>2238</b>	<b>35.2</b>		
470.lbm	8	4943	22.2	4948	22.2	<b>4946</b>	<b>22.2</b>	8	<b>4880</b>	<b>22.5</b>	4873	22.6	4889	22.5		
481.wrf	8	2472	36.1	<b>2477</b>	<b>36.1</b>	2477	36.1	8	2472	36.1	<b>2477</b>	<b>36.1</b>	2477	36.1		
482.sphinx3	8	4569	34.1	4581	34.0	<b>4572</b>	<b>34.1</b>	8	4351	35.8	4338	35.9	<b>4343</b>	<b>35.9</b>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
'/usr/bin/taskset' used to bind processes to CPUs

## General Notes

The system bus runs at 800 MHz

All binaries were built with 64-bit Intel compiler except:  
433.milc, 434.zeusmp, 450.soplex, 470.lbm and 482.sphinx3 in peak were built with 32-bit Intel compiler by changing the path for include and library files.

BIOS configuration:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

PRIMERGY RX600 S3, Intel Xeon processor 7120M,  
3.0 GHz

SPECfp\_rate2006 = 32.2

SPECfp\_rate\_base2006 = 31.7

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jun-2007

Hardware Availability: Aug-2006

Software Availability: Mar-2007

## General Notes (Continued)

Hardware Prefetch = Enable

The PRIMERGY RX600 S3 and the PRIMERGY TX600 S3 are electronically equivalent.

For information about Fujitsu Siemens Computers in your country please see:  
<http://www.fujitsu-siemens.com/countries>

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-fast

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu Siemens Computers**

PRIMERGY RX600 S3, Intel Xeon processor 7120M,  
3.0 GHz

**SPECfp\_rate2006 = 32.2**

**SPECfp\_rate\_base2006 = 31.7**

**CPU2006 license:** 22

**Test sponsor:** Fujitsu Siemens Computers

**Tested by:** Fujitsu Siemens Computers

**Test date:** Jun-2007

**Hardware Availability:** Aug-2006

**Software Availability:** Mar-2007

## Base Optimization Flags (Continued)

C++ benchmarks:

-fast

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast

## Peak Compiler Invocation

C benchmarks:

/opt/intel/cc/9.1.047/bin/icc -I/opt/intel/cc/9.1.047/include  
-L/opt/intel/cc/9.1.047/lib

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/cc/9.1.047/bin/icpc  
-I/opt/intel/cc/9.1.047/include -L/opt/intel/cc/9.1.047/lib

Fortran benchmarks (except as noted below):

ifort

434.zeusmp: /opt/intel/fc/9.1.043/bin/ifort  
-I/opt/intel/fc/9.1.043/include -L/opt/intel/fc/9.1.043/lib

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu Siemens Computers**

PRIMERGY RX600 S3, Intel Xeon processor 7120M,  
3.0 GHz

**SPECfp\_rate2006 = 32.2**

**SPECfp\_rate\_base2006 = 31.7**

**CPU2006 license:** 22

**Test sponsor:** Fujitsu Siemens Computers

**Tested by:** Fujitsu Siemens Computers

**Test date:** Jun-2007

**Hardware Availability:** Aug-2006

**Software Availability:** Mar-2007

## Peak Optimization Flags

C benchmarks:

433.milc: -prof\_gen(pass 1) -prof\_use(pass 2) -fast

470.lbm: Same as 433.milc

482.sphinx3: -fast

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: -prof\_gen(pass 1) -prof\_use(pass 2) -fast

450.soplex: Same as 447.dealII

453.povray: Same as 447.dealII

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -prof\_gen(pass 1) -prof\_use(pass 2) -fast

Benchmarks using both Fortran and C:

435.gromacs: -prof\_gen(pass 1) -prof\_use(pass 2) -fast

436.cactusADM: basepeak = yes

454.calculix: Same as 435.gromacs

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.09.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.09.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.09.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.09.xml)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

PRIMERGY RX600 S3, Intel Xeon processor 7120M,  
3.0 GHz

SPECfp\_rate2006 = 32.2

SPECfp\_rate\_base2006 = 31.7

**CPU2006 license:** 22

**Test sponsor:** Fujitsu Siemens Computers

**Tested by:** Fujitsu Siemens Computers

**Test date:** Jun-2007

**Hardware Availability:** Aug-2006

**Software Availability:** Mar-2007

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 11:17:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 26 June 2007.