



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale T840  
(Intel Xeon processor E5345, 2.33GHz)

**SPECint\_rate2006 = 72.2**

**SPECint\_rate\_base2006 = 70.1**

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

**Test date:** May-2007

**Hardware Availability:** Nov-2006

**Software Availability:** Mar-2007

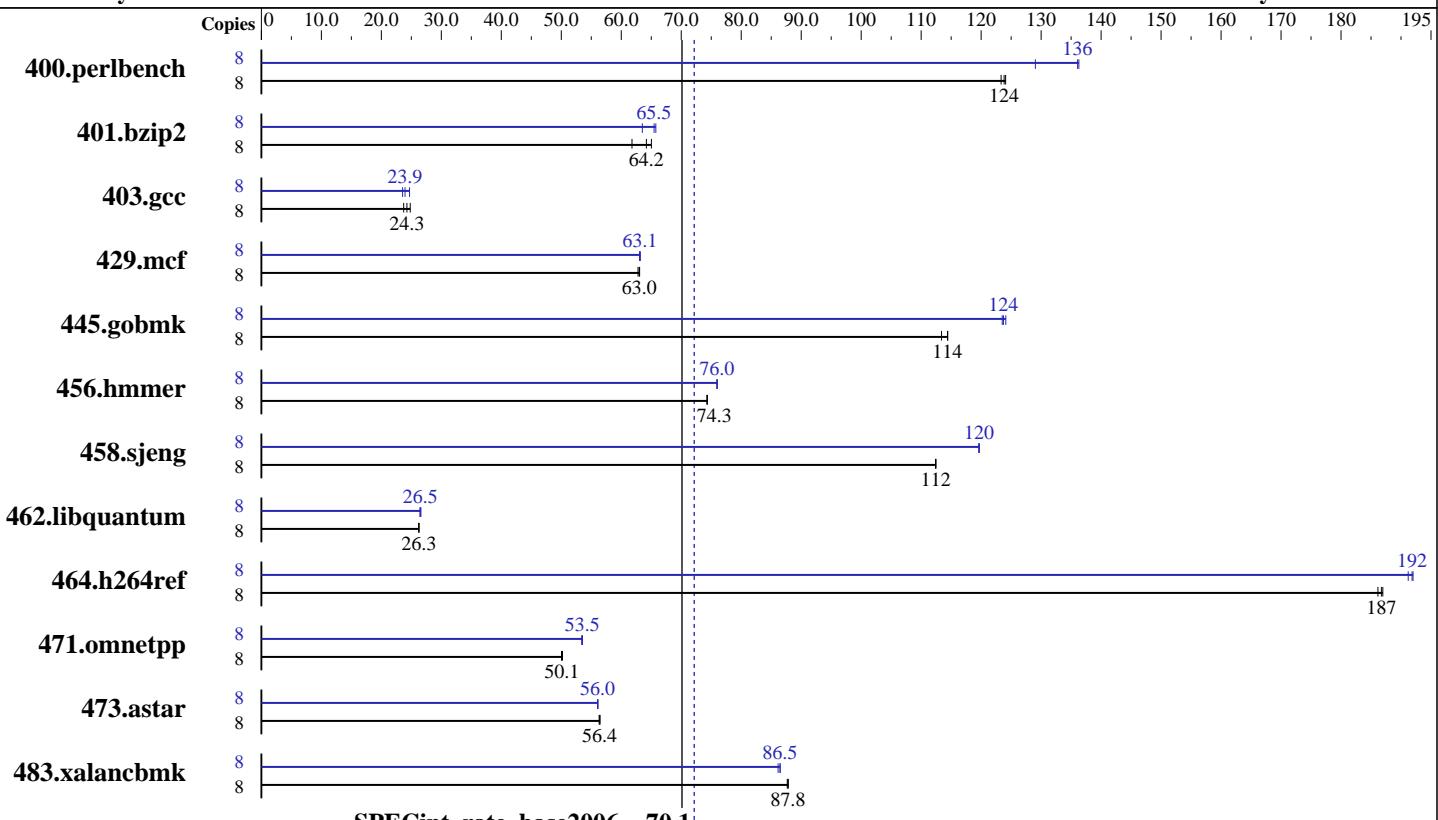

**SPECint\_rate\_base2006 = 70.1**

**SPECint\_rate2006 = 72.2**

### Hardware

CPU Name: Intel Xeon E5345  
CPU Characteristics: 2.33 GHz, 8 MB L2, 1333 MHz bus  
CPU MHz: 2330  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
CPU(s) orderable: 1 to 2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores  
L3 Cache: None  
Other Cache: None  
Memory: 16 GB (2x8 GB) FB-DIMM PC2-5300F ECC CL5  
Disk Subsystem: 3x73 GB SCSI, 15000 RPM  
Other Hardware: None

### Software

Operating System: Windows Server 2003 Enterprise X64 Edition  
Compiler: Intel C++ Compiler for IA32 version 9.1  
Build 20070322Z Package ID: W\_CC\_P\_9.1.037  
Microsoft Visual Studio .NET 2003 (libraries)  
Auto Parallel: No  
File System: NTFS  
System State: Default  
Base Pointers: 32-bit  
Peak Pointers: 32-bit  
Other Software: MicroQuill SmartHeap Library 8.0 (shlw32M.lib)



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale T840  
(Intel Xeon processor E5345, 2.33GHz)

**SPECint\_rate2006 = 72.2**

**SPECint\_rate\_base2006 = 70.1**

CPU2006 license: 20

Test date: May-2007

Test sponsor: Bull SAS

Hardware Availability: Nov-2006

Tested by: Bull SAS

Software Availability: Mar-2007

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	634	123	<b>631</b>	<b>124</b>	630	124	8	606	129	<b>574</b>	<b>136</b>	573	136
401.bzip2	8	1249	61.8	<b>1203</b>	<b>64.2</b>	1187	65.0	8	1216	63.5	<b>1179</b>	<b>65.5</b>	1174	65.8
403.gcc	8	2595	24.8	<b>2654</b>	<b>24.3</b>	2714	23.7	8	2607	24.7	<b>2689</b>	<b>23.9</b>	2736	23.5
429.mcf	8	<b>1158</b>	<b>63.0</b>	1162	62.8	1157	63.1	8	1155	63.2	1157	63.0	<b>1156</b>	<b>63.1</b>
445.gobmk	8	740	113	733	114	<b>734</b>	<b>114</b>	8	679	124	676	124	<b>678</b>	<b>124</b>
456.hammer	8	1004	74.3	<b>1004</b>	<b>74.3</b>	1004	74.3	8	983	76.0	982	76.0	<b>983</b>	<b>76.0</b>
458.sjeng	8	861	112	<b>861</b>	<b>112</b>	861	112	8	809	120	809	120	<b>809</b>	<b>120</b>
462.libquantum	8	<b>6314</b>	<b>26.3</b>	6317	26.2	6311	26.3	8	<b>6261</b>	<b>26.5</b>	6265	26.5	6231	26.6
464.h264ref	8	951	186	<b>948</b>	<b>187</b>	947	187	8	926	191	<b>923</b>	<b>192</b>	922	192
471.omnetpp	8	999	50.0	<b>998</b>	<b>50.1</b>	996	50.2	8	936	53.4	934	53.5	<b>935</b>	<b>53.5</b>
473.astar	8	997	56.3	<b>995</b>	<b>56.4</b>	995	56.4	8	1000	56.1	1002	56.0	<b>1002</b>	<b>56.0</b>
483.xalancbmk	8	630	87.7	<b>629</b>	<b>87.8</b>	628	87.8	8	641	86.1	<b>638</b>	<b>86.5</b>	638	86.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Base Compiler Invocation

C benchmarks:

```
icl -Qvc7.1 -Qc99
```

C++ benchmarks:

```
icl -Qvc7.1
```

## Base Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32

464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32

## Base Optimization Flags

C benchmarks:

```
-fast /F512000000 shlw32m.lib -link /FORCE:MULTIPLE
```

C++ benchmarks:

```
-fast -Qcxx_features /F512000000 shlw32m.lib -link /FORCE:MULTIPLE
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale T840  
(Intel Xeon processor E5345,2.33GHz)

**SPECint\_rate2006 = 72.2**

**SPECint\_rate\_base2006 = 70.1**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Bull SAS

**Test date:** May-2007

**Hardware Availability:** Nov-2006

**Software Availability:** Mar-2007

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks:

icl -Qvc7.1 -Qc99

C++ benchmarks:

icl -Qvc7.1

## Peak Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32

464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32

## Peak Optimization Flags

C benchmarks:

400.perlbench: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast /F512000000  
shlw32m.lib -link /FORCE:MULTIPLE

401.bzip2: Same as 400.perlbench

403.gcc: Same as 400.perlbench

429.mcf: -fast /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE

445.gobmk: Same as 400.perlbench

456.hmmer: Same as 400.perlbench

458.sjeng: Same as 400.perlbench

462.libquantum: Same as 400.perlbench

464.h264ref: Same as 400.perlbench

C++ benchmarks:

-Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qcxx\_features  
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T840  
(Intel Xeon processor E5345,2.33GHz)

**SPECint\_rate2006 = 72.2**

**SPECint\_rate\_base2006 = 70.1**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Bull SAS

**Test date:** May-2007

**Hardware Availability:** Nov-2006

**Software Availability:** Mar-2007

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/flags.20090714.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/flags.20090714.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 11:18:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 June 2007.