



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Supermicro X7DB8+ (Intel Xeon processor E5335, 2.00 GHz)

SPECint®2006 = 15.6

SPECint_base2006 = 14.2

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2007

Hardware Availability: Sep-2007

Software Availability: Jun-2007

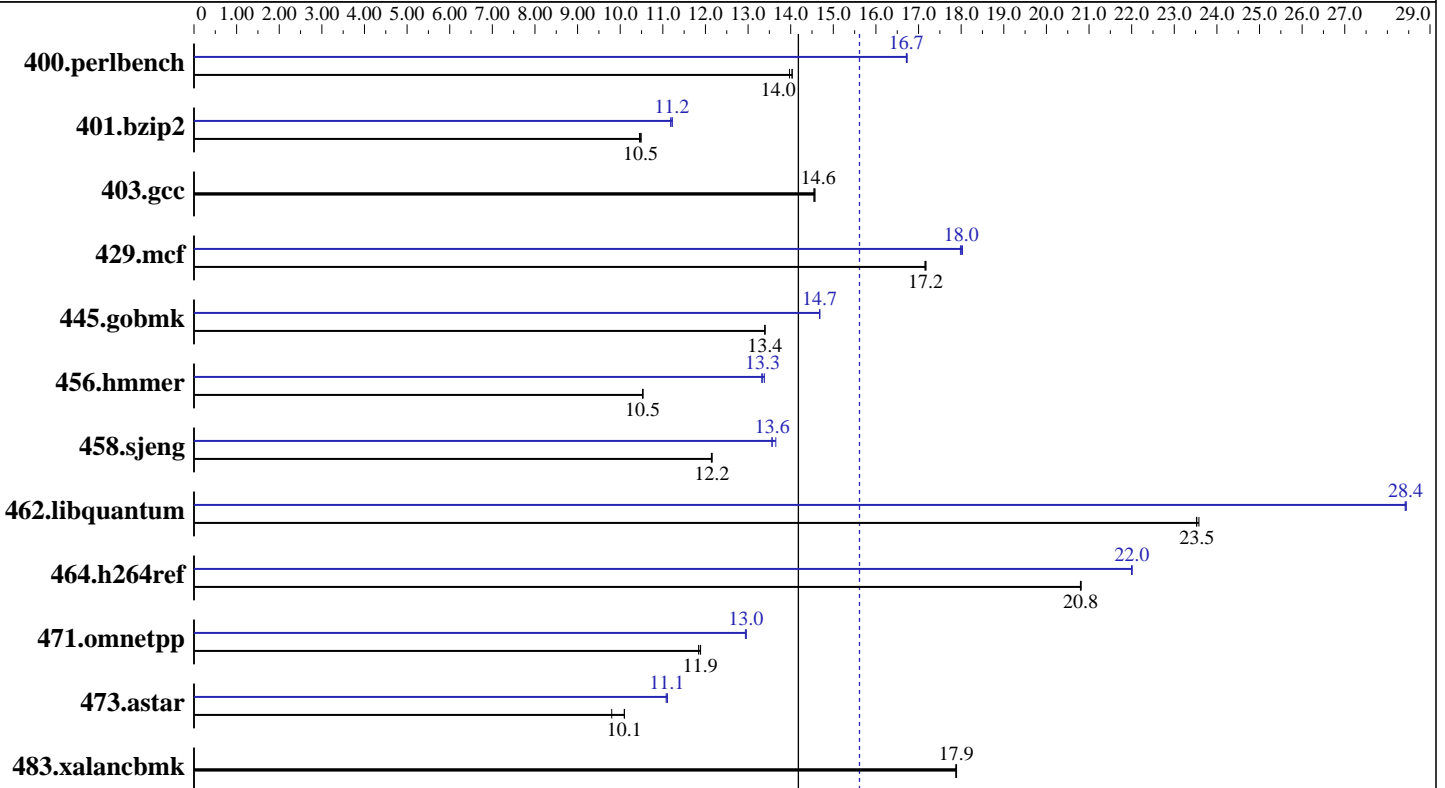

SPECint_base2006 = 14.2

SPECint2006 = 15.6

Hardware

CPU Name: Intel Xeon E5335
 CPU Characteristics: Quad Core, 2.00 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8 * 2GB Samsung DDR2 5300F, 2 rank, CL5-5-5, ECC)
 Disk Subsystem: Seagate, SCSI, 73GB, 10Krpm, 1 disk only
 Other Hardware: None

Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 10, Kernel 2.6.16.21-0.8-smp for x86_64
 Compiler: Intel C++ Compiler for Linux32 version 10.0 Build 20070426 Package ID: l_cc_p_10.0.023
 Auto Parallel: No
 File System: ReiserFS
 System State: Multi-user, run level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap library V8.1 Binutils 2.17.50.0.15



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Supermicro X7DB8+ (Intel Xeon processor E5335, 2.00 GHz)

SPECint2006 = 15.6

SPECint_base2006 = 14.2

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2007

Hardware Availability: Sep-2007

Software Availability: Jun-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<u>696</u>	<u>14.0</u>	696	14.0	699	14.0	584	16.7	585	16.7	<u>584</u>	<u>16.7</u>
401.bzip2	920	10.5	<u>921</u>	<u>10.5</u>	923	10.5	863	11.2	<u>861</u>	<u>11.2</u>	860	11.2
403.gcc	<u>553</u>	<u>14.6</u>	553	14.5	552	14.6	<u>553</u>	<u>14.6</u>	553	14.5	552	14.6
429.mcf	<u>531</u>	<u>17.2</u>	532	17.1	531	17.2	<u>507</u>	<u>18.0</u>	506	18.0	507	18.0
445.gobmk	783	13.4	<u>783</u>	<u>13.4</u>	783	13.4	<u>715</u>	<u>14.7</u>	714	14.7	715	14.7
456.hmmer	886	10.5	<u>886</u>	<u>10.5</u>	886	10.5	697	13.4	<u>699</u>	<u>13.3</u>	700	13.3
458.sjeng	996	12.2	<u>996</u>	<u>12.2</u>	997	12.1	892	13.6	886	13.7	<u>892</u>	<u>13.6</u>
462.libquantum	<u>881</u>	<u>23.5</u>	879	23.6	881	23.5	728	28.4	729	28.4	<u>729</u>	<u>28.4</u>
464.h264ref	1064	20.8	1063	20.8	<u>1064</u>	<u>20.8</u>	1005	22.0	1006	22.0	<u>1006</u>	<u>22.0</u>
471.omnetpp	<u>526</u>	<u>11.9</u>	526	11.9	528	11.8	<u>482</u>	<u>13.0</u>	482	13.0	483	12.9
473.astar	716	9.80	695	10.1	<u>695</u>	<u>10.1</u>	632	11.1	634	11.1	<u>633</u>	<u>11.1</u>
483.xalancbmk	<u>386</u>	<u>17.9</u>	386	17.9	386	17.9	<u>386</u>	<u>17.9</u>	386	17.9	386	17.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Bios settings:

Hardware Prefetcher: Enabled

Adjacent Sector Prefetch: Enabled

ulimit -s unlimited used to set stack size to unlimited

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer, for peak, are compiled in 64-bit mode

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Supermicro X7DB8+ (Intel Xeon processor E5335, 2.00 GHz)

SPECint2006 = 15.6

SPECint_base2006 = 14.2

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2007

Hardware Availability: Sep-2007

Software Availability: Jun-2007

Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/spec/cpu2006.1.0/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/cce/10.0.023/bin/icc
-L/opt/intel/cce/10.0.023/lib
-I/opt/intel/cce/10.0.023/include

456.hmmer: /opt/intel/cce/10.0.023/bin/icc
-L/opt/intel/cce/10.0.023/lib
-I/opt/intel/cce/10.0.023/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 15.6

Supermicro X7DB8+ (Intel Xeon processor E5335, 2.00 GHz)

SPECint_base2006 = 14.2

CPU2006 license: 13

Test date: May-2007

Test sponsor: Intel Corporation

Hardware Availability: Sep-2007

Tested by: Intel Corporation

Software Availability: Jun-2007

Peak Optimization Flags (Continued)

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias -prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast

403.gcc: basepeak = yes

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo -no-prec_div -ansi-alias

456.hmmer: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always

464.h264ref: Same as 456.hmmer

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec_div -ansi-alias -Wl,-z,muldefs -L/spec/cpu2006.1.0/lib -lsmartheap

473.astar: Same as 471.omnetpp

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090715.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090715.00.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Supermicro X7DB8+ (Intel Xeon processor E5335, 2.00 GHz)

SPECint2006 = 15.6

SPECint_base2006 = 14.2

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: May-2007
Hardware Availability: Sep-2007
Software Availability: Jun-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 11:22:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 June 2007.