



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®2006 = 21.6

IBM System i 570 (4.7 GHz, 1 core)

SPECint_base2006 = 17.8

CPU2006 license: 11


Test date: May-2007

Test sponsor: IBM Corporation

Hardware Availability: Sep-2007

Tested by: IBM Corporation

Software Availability: Jun-2007

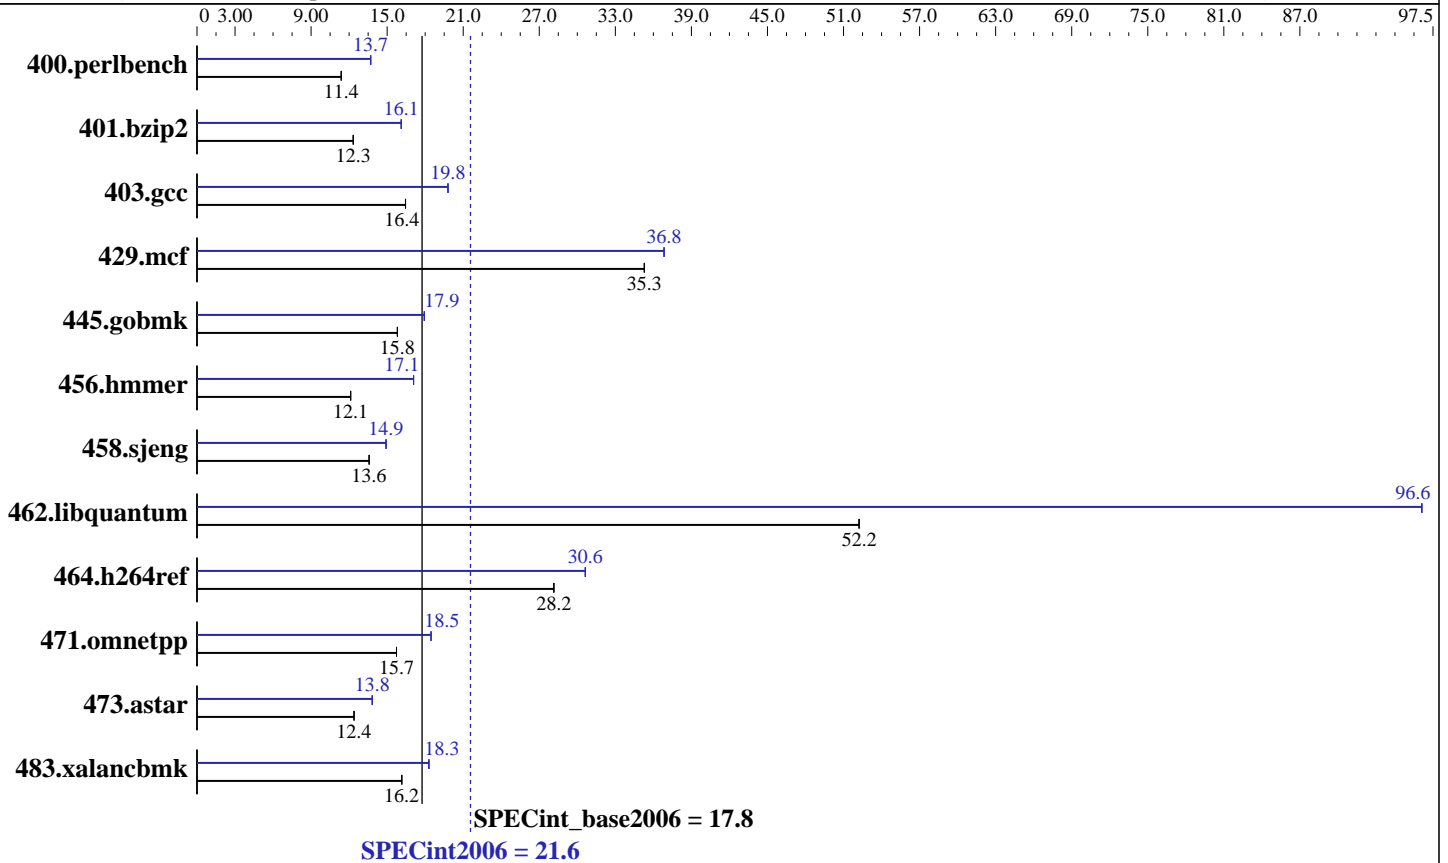

Hardware

CPU Name: POWER6
 CPU Characteristics:
 CPU MHz: 4700
 FPU: Integrated
 CPU(s) enabled: 1 core, 1 chip, 2 cores/chip
 CPU(s) orderable: 4,8,12,16 cores
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per core
 L3 Cache: 32 MB I+D off chip per chip
 Other Cache: None
 Memory: 16 GB (8x2 GB) DDR2 667 MHz
 Disk Subsystem: 1x73 GB 1x146 GB SAS 15K RPM
 Other Hardware: None

Software

Operating System: IBM AIX 5L V5.3
 Compiler: XL C/C++ Enterprise Edition Version 9.0 for AIX
 Auto Parallel: No
 File System: AIX/JFS2
 System State: Multi-user
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: --



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 21.6

IBM System i 570 (4.7 GHz, 1 core)

SPECint_base2006 = 17.8

CPU2006 license: 11

Test date: May-2007

Test sponsor: IBM Corporation

Hardware Availability: Sep-2007

Tested by: IBM Corporation

Software Availability: Jun-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<u>859</u>	<u>11.4</u>	859	11.4	858	11.4	<u>713</u>	<u>13.7</u>	713	13.7	712	13.7
401.bzip2	<u>783</u>	<u>12.3</u>	783	12.3	783	12.3	599	16.1	<u>599</u>	<u>16.1</u>	599	16.1
403.gcc	490	16.4	<u>489</u>	<u>16.4</u>	489	16.5	407	19.8	407	19.8	<u>407</u>	<u>19.8</u>
429.mcf	<u>258</u>	<u>35.3</u>	258	35.3	258	35.3	248	36.8	247	36.9	<u>248</u>	<u>36.8</u>
445.gobmk	<u>664</u>	<u>15.8</u>	664	15.8	664	15.8	585	17.9	<u>585</u>	<u>17.9</u>	585	17.9
456.hammer	770	12.1	<u>770</u>	<u>12.1</u>	770	12.1	546	17.1	546	17.1	<u>546</u>	<u>17.1</u>
458.sjeng	891	13.6	<u>891</u>	<u>13.6</u>	891	13.6	<u>811</u>	<u>14.9</u>	811	14.9	811	14.9
462.libquantum	<u>397</u>	<u>52.2</u>	397	52.2	397	52.2	214	96.6	214	96.6	<u>214</u>	<u>96.6</u>
464.h264ref	786	28.1	<u>786</u>	<u>28.2</u>	786	28.2	722	30.6	<u>723</u>	<u>30.6</u>	723	30.6
471.omnetpp	<u>397</u>	<u>15.7</u>	397	15.7	397	15.7	338	18.5	<u>339</u>	<u>18.5</u>	339	18.5
473.astar	567	12.4	566	12.4	<u>567</u>	<u>12.4</u>	508	13.8	508	13.8	<u>508</u>	<u>13.8</u>
483.xalancbmk	427	16.2	427	16.2	<u>427</u>	<u>16.2</u>	<u>377</u>	<u>18.3</u>	377	18.3	377	18.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

AIX 5L V5.3 updated with the 5300-06 Technology Level.

See flags file of details on following settings.

all ulimits set to unlimited

Environment variables set before executing benchmarks:

MALLOCOPTIONS=pool

MEMORY_AFFINITY=MCM

XLFRTEOPTS=intrinthds=1

System set to "Enhanced" mode when defining partition on HMC

Speed run on 1 core partition defined on HMC,

768 16M pages defined on systems with vmo command

fdpr binary optimization tool used for

401.bzip2 403.gcc 429.mcf 456.hammer 462.libquantum 473.astar

submit used to bind benchmark to a processor using "bindprocessor"

The "IBM System p 570" and "IBM System i 570" are electronically equivalent.

The results have been measured on the "IBM System p 570" model.

Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc

C++ benchmarks:

/usr/vacpp/bin/xlc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	SPECint2006 =	21.6
IBM System i 570 (4.7 GHz, 1 core)	SPECint_base2006 =	17.8

CPU2006 license: 11	Test date:	May-2007
Test sponsor: IBM Corporation	Hardware Availability:	Sep-2007
Tested by: IBM Corporation	Software Availability:	Jun-2007

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_AIX
462.libquantum: -DSPEC_CPU_AIX
464.h264ref: -DSPEC_CPU_AIX -qchars=signed
483.xalancbmk: -DSPEC_CPU_AIX
```

Base Optimization Flags

```
C benchmarks:
-05 -qlargepage -D_ILS_MACROS -qalloca -blpdata

C++ benchmarks:
-05 -qlargepage -D_ILS_MACROS -qrtti=all -blpdata
```

Base Other Flags

```
C benchmarks:
-qlanglvl=extc99 -bmaxdata:0x50000000 -qalias=noansi -qipa=noobject
-qipa=threads -qsuppress=1500-036

C++ benchmarks:
-bmaxdata:0x20000000 -qipa=noobject -qipa=threads -qsuppress=1500-036
```

Peak Compiler Invocation

```
C benchmarks:
/usr/vac/bin/xlc

C++ benchmarks:
/usr/vacpp/bin/xlC
```

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_AIX
403.gcc: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_AIX
464.h264ref: -DSPEC_CPU_AIX -qchars=signed
483.xalancbmk: -DSPEC_CPU_AIX
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 21.6

IBM System i 570 (4.7 GHz, 1 core)

SPECint_base2006 = 17.8

CPU2006 license: 11

Test date: May-2007

Test sponsor: IBM Corporation

Hardware Availability: Sep-2007

Tested by: IBM Corporation

Software Availability: Jun-2007

Peak Optimization Flags

C benchmarks:

400.perlbench: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx -qvecnvml -D_ILS_MACROS -blpdata

401.bzip2: Same as 400.perlbench

403.gcc: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -D_ILS_MACROS -qalloca -q64 -blpdata

429.mcf: -O5 -qlargepage -qenablevmx -qvecnvml -D_ILS_MACROS -blpdata

445.gobmk: Same as 400.perlbench

456.hmmer: -O5 -qlargepage -D_ILS_MACROS -blpdata

458.sjeng: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qlargepage -qenablevmx -qvecnvml -D_ILS_MACROS -blpdata

462.libquantum: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx -qvecnvml -D_ILS_MACROS -q64 -blpdata

464.h264ref: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -D_ILS_MACROS -blpdata

C++ benchmarks:

471.omnetpp: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx -qvecnvml -D_ILS_MACROS -qalign=natural -qrtti=all -qinlglue -blpdata

473.astar: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx -qvecnvml -D_ILS_MACROS -blpdata

483.xalancbmk: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -D_ILS_MACROS -qinlglue -D__IBM_FAST_VECTOR -blpdata

Peak Other Flags

C benchmarks (except as noted below):

-qlanglvl=extc99 -qipa=noobject -qipa=threads -qsuppress=1500-036

400.perlbench: -qlanglvl=extc99 -bmaxdata:0x50000000 -qalias=noansi -qipa=noobject -qipa=threads -qsuppress=1500-036

401.bzip2: -qlanglvl=extc99 -bmaxdata:0x4fffffff -qipa=noobject -qipa=threads -qsuppress=1500-036

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 21.6

IBM System i 570 (4.7 GHz, 1 core)

SPECint_base2006 = 17.8

CPU2006 license: 11

Test date: May-2007

Test sponsor: IBM Corporation

Hardware Availability: Sep-2007

Tested by: IBM Corporation

Software Availability: Jun-2007

Peak Other Flags (Continued)

429.mcf: -qlanglvl=extc99 -bmaxdata:0x50000000 -qipa=noobject
-qipa=threads -qsuppress=1500-036

C++ benchmarks:

-bmaxdata:0x20000000 -qipa=noobject -qipa=threads -qsuppress=1500-036

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.12.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.12.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 12:49:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 August 2007.