



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## IBM Corporation

### SPECfp<sup>®</sup>\_rate2006 = 86.6

### IBM System x3755 (AMD Opteron 8218)

### SPECfp\_rate\_base2006 = 82.5

CPU2006 license: 11


Test date: Jul-2007

Test sponsor: IBM Corporation

Hardware Availability: Oct-2006

Tested by: IBM Corporation

Software Availability: Mar-2007

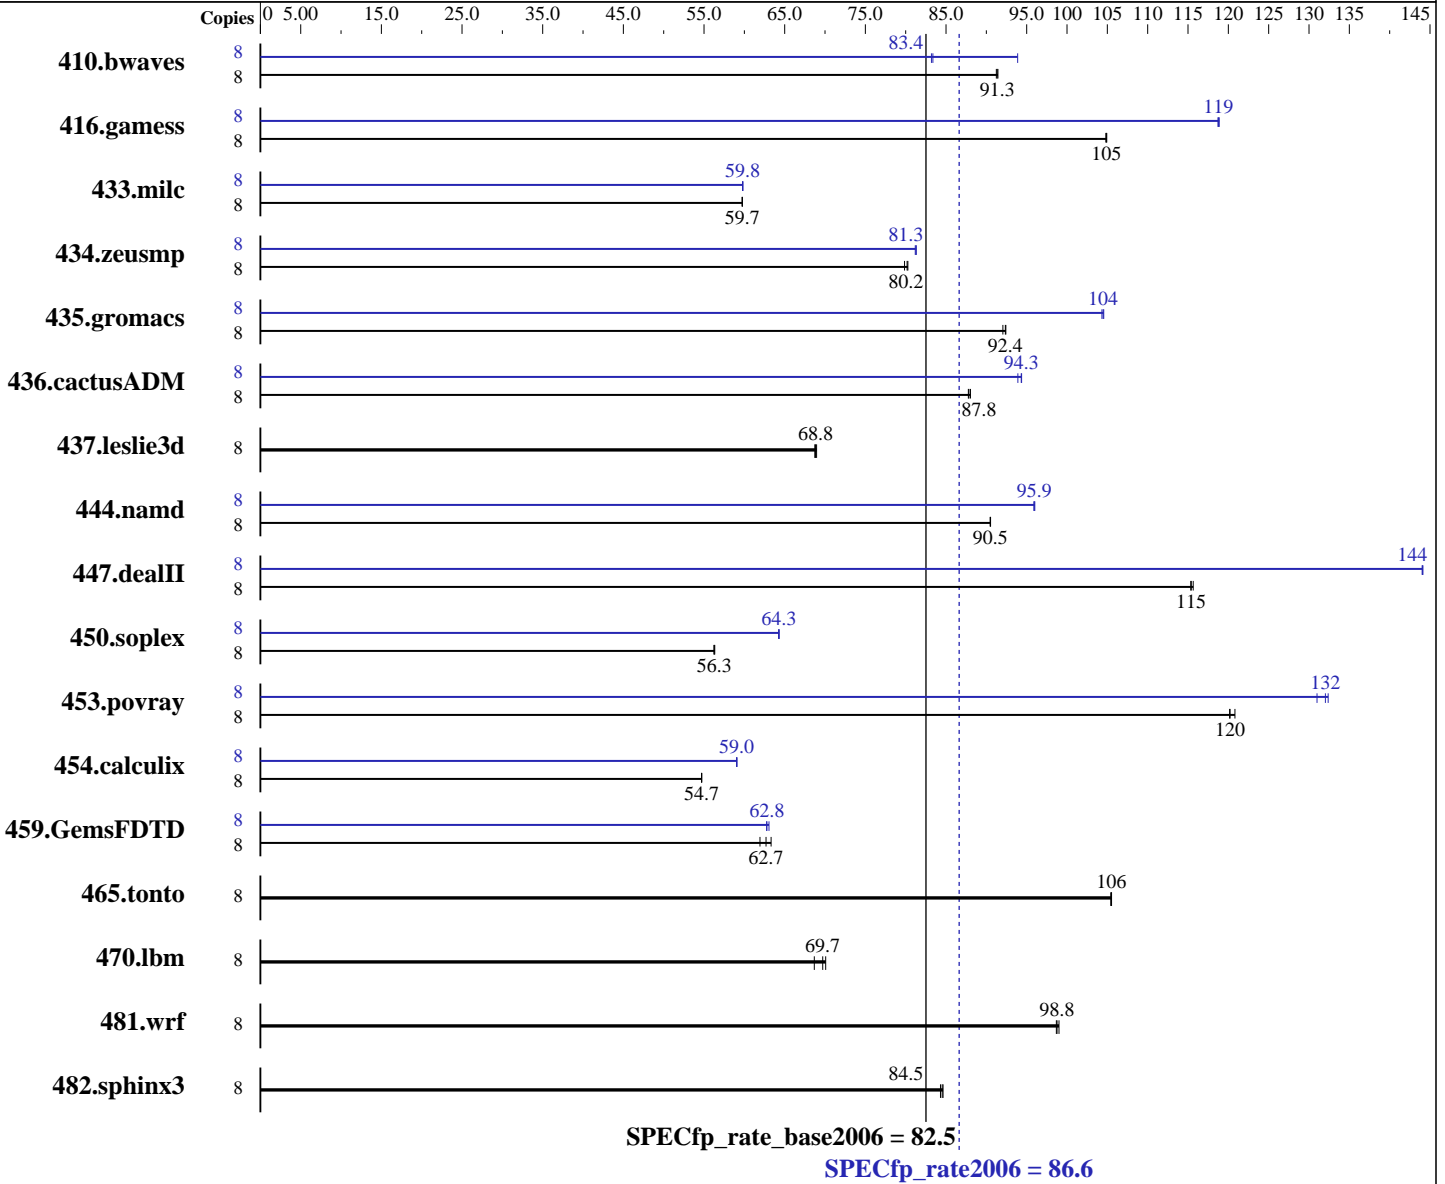

#### Hardware

CPU Name: AMD Opteron 8218  
 CPU Characteristics:  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 4 chips, 2 cores/chip  
 CPU(s) orderable: 1, 2, 3, 4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

#### Software

Operating System: SLES 10 (x86\_64), 2.6.16.21-0.8-smp  
 Compiler: QLogic PathScale Compiler Suite, Release 3.0  
 Auto Parallel: No  
 File System: ext3  
 System State: Multi-user, run level 3  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 86.6

IBM System x3755 (AMD Opteron 8218)

SPECfp\_rate\_base2006 = 82.5

CPU2006 license: 11

Test date: Jul-2007

Test sponsor: IBM Corporation

Hardware Availability: Oct-2006

Tested by: IBM Corporation

Software Availability: Mar-2007

L3 Cache: None  
Other Cache: None  
Memory: 32 GB (16 x 2GB DDR2-5300 ECC)  
Disk Subsystem: 1 x 36 GB SAS, 15000 RPM  
Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1192	91.2	1189	91.4	<b>1190</b>	<b>91.3</b>	8	1158	93.9	<b>1304</b>	<b>83.4</b>	1307	83.2
416.gamess	8	1494	105	<b>1493</b>	<b>105</b>	1493	105	8	1319	119	1318	119	<b>1319</b>	<b>119</b>
433.milc	8	1229	59.7	1229	59.8	<b>1229</b>	<b>59.7</b>	8	1228	59.8	<b>1228</b>	<b>59.8</b>	1229	59.8
434.zeusmp	8	912	79.9	<b>908</b>	<b>80.2</b>	907	80.3	8	895	81.3	<b>896</b>	<b>81.3</b>	897	81.2
435.gromacs	8	<b>618</b>	<b>92.4</b>	621	92.1	618	92.4	8	548	104	546	105	<b>547</b>	<b>104</b>
436.cactusADM	8	1089	87.8	<b>1088</b>	<b>87.8</b>	1086	88.0	8	1018	93.9	<b>1014</b>	<b>94.3</b>	1013	94.4
437.leslie3d	8	1091	69.0	<b>1093</b>	<b>68.8</b>	1094	68.7	8	1091	69.0	<b>1093</b>	<b>68.8</b>	1094	68.7
444.namd	8	<b>709</b>	<b>90.5</b>	709	90.5	709	90.5	8	669	95.9	<b>669</b>	<b>95.9</b>	668	96.0
447.dealII	8	793	115	791	116	<b>793</b>	<b>115</b>	8	635	144	635	144	<b>635</b>	<b>144</b>
450.soplex	8	<b>1186</b>	<b>56.3</b>	1184	56.3	1186	56.2	8	<b>1038</b>	<b>64.3</b>	1038	64.3	1039	64.2
453.povray	8	352	121	354	120	<b>354</b>	<b>120</b>	8	<b>322</b>	<b>132</b>	322	132	325	131
454.calculix	8	1206	54.7	<b>1207</b>	<b>54.7</b>	1207	54.7	8	1118	59.0	1117	59.1	<b>1118</b>	<b>59.0</b>
459.GemsFDTD	8	<b>1354</b>	<b>62.7</b>	1370	61.9	1341	63.3	8	1346	63.1	<b>1352</b>	<b>62.8</b>	1352	62.8
465.tonto	8	747	105	746	106	<b>746</b>	<b>106</b>	8	747	105	746	106	<b>746</b>	<b>106</b>
470.lbm	8	1601	68.7	1568	70.1	<b>1577</b>	<b>69.7</b>	8	1601	68.7	1568	70.1	<b>1577</b>	<b>69.7</b>
481.wrf	8	906	98.7	903	99.0	<b>905</b>	<b>98.8</b>	8	906	98.7	903	99.0	<b>905</b>	<b>98.8</b>
482.sphinx3	8	1849	84.3	<b>1845</b>	<b>84.5</b>	1842	84.6	8	1849	84.3	<b>1845</b>	<b>84.5</b>	1842	84.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

taskset utility used to bind CPU(s) to processes  
DSPEC\_CPU\_TABLE\_WORKAROUND was used for portability when compiling 447.dealII  
due to compilation being performed on SLES 9 SP3

## Base Compiler Invocation

C benchmarks:  
pathcc

C++ benchmarks:  
pathCC

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 86.6

IBM System x3755 (AMD Opteron 8218)

SPECfp\_rate\_base2006 = 82.5

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2007

Hardware Availability: Oct-2006

Software Availability: Mar-2007

## Base Compiler Invocation (Continued)

Fortran benchmarks:  
pathf95

Benchmarks using both Fortran and C:  
pathcc pathf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64  
 436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_TABLE\_WORKAROUND  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -fno-second-underscore  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-Ofast

C++ benchmarks:  
-Ofast

Fortran benchmarks:  
-Ofast -OPT:malloc\_alg=1

Benchmarks using both Fortran and C:  
-Ofast -OPT:malloc\_alg=1

## Base Other Flags

C benchmarks:  
-IPA:max\_jobs=2

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 86.6

IBM System x3755 (AMD Opteron 8218)

SPECfp\_rate\_base2006 = 82.5

CPU2006 license: 11

Test date: Jul-2007

Test sponsor: IBM Corporation

Hardware Availability: Oct-2006

Tested by: IBM Corporation

Software Availability: Mar-2007

## Base Other Flags (Continued)

C++ benchmarks:

-IPA:max\_jobs=2

Fortran benchmarks:

-IPA:max\_jobs=2

Benchmarks using both Fortran and C:

-IPA:max\_jobs=2

## Peak Compiler Invocation

C benchmarks:

pathcc

C++ benchmarks:

pathCC

Fortran benchmarks:

pathf95

Benchmarks using both Fortran and C:

pathcc pathf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64  
 436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_TABLE\_WORKAROUND  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -fno-second-underscore  
 482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 86.6

IBM System x3755 (AMD Opteron 8218)

SPECfp\_rate\_base2006 = 82.5

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2007

Hardware Availability: Oct-2006

Software Availability: Mar-2007

## Peak Optimization Flags

### C benchmarks:

433.milc: -Ofast -CG:cflow=off -LNO:prefetch=1 -OPT:malloc\_alg=1

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

### C++ benchmarks:

444.namd: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-fno-exceptions

447.dealIII: -Ofast -INLINE:aggressive=on -LNO:opt=0 -OPT:alias=disjoint  
-m32 -fno-exceptions

450.soplex: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -m32 -O3  
-OPT:IEEE\_arith=3 -CG:load\_exe=0 -CG:movnti=1  
-LNO:minvariant=off -LNO:prefetch=1 -fno-exceptions

453.povray: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-fno-fast-math

### Fortran benchmarks:

410.bwaves: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-OPT:Ofast -OPT:IEEE\_arith=3 -LNO:blocking=off  
-LNO:ignore\_feedback=off

416.gamess: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O2  
-OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256

434.zeusmp: -Ofast -CG:local\_fwd\_sched=on -LNO:blocking=off  
-LNO:interchange=off -LNO:fu=10 -LNO:full\_unroll\_outer=on

437.leslie3d: basepeak = yes

459.GemsFDTD: -Ofast -LNO:fission=2 -LNO:prefetch=0

465.tonto: basepeak = yes

### Benchmarks using both Fortran and C:

435.gromacs: -O3 -OPT:rsqrt=2 -OPT:ro=3

436.cactusADM: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-LNO:prefetch=3 -LNO:prefetch\_ahead=5 -LNO:ou\_prod\_max=10  
-LNO:full\_unroll=5 -ipa

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 86.6

IBM System x3755 (AMD Opteron 8218)

SPECfp\_rate\_base2006 = 82.5

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2007

Hardware Availability: Oct-2006

Software Availability: Mar-2007

## Peak Optimization Flags (Continued)

454.calculix: -Ofast -LNO:simd=0 -WOPT:mem\_opnds=on

481.wrf: basepeak = yes

## Peak Other Flags

C benchmarks:

-IPA:max\_jobs=2

C++ benchmarks:

-IPA:max\_jobs=2

Fortran benchmarks:

-IPA:max\_jobs=2

Benchmarks using both Fortran and C:

-IPA:max\_jobs=2

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.13.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.13.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.13.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.13.xml)

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Sep 13 11:24:48 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 21 August 2007.