



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

**SPECint®\_rate2006 = 52.5**

### IBM System x3655 (AMD Opteron 2220)

**SPECint\_rate\_base2006 = 47.1**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2007

Hardware Availability: Jan-2007

Software Availability: Mar-2007

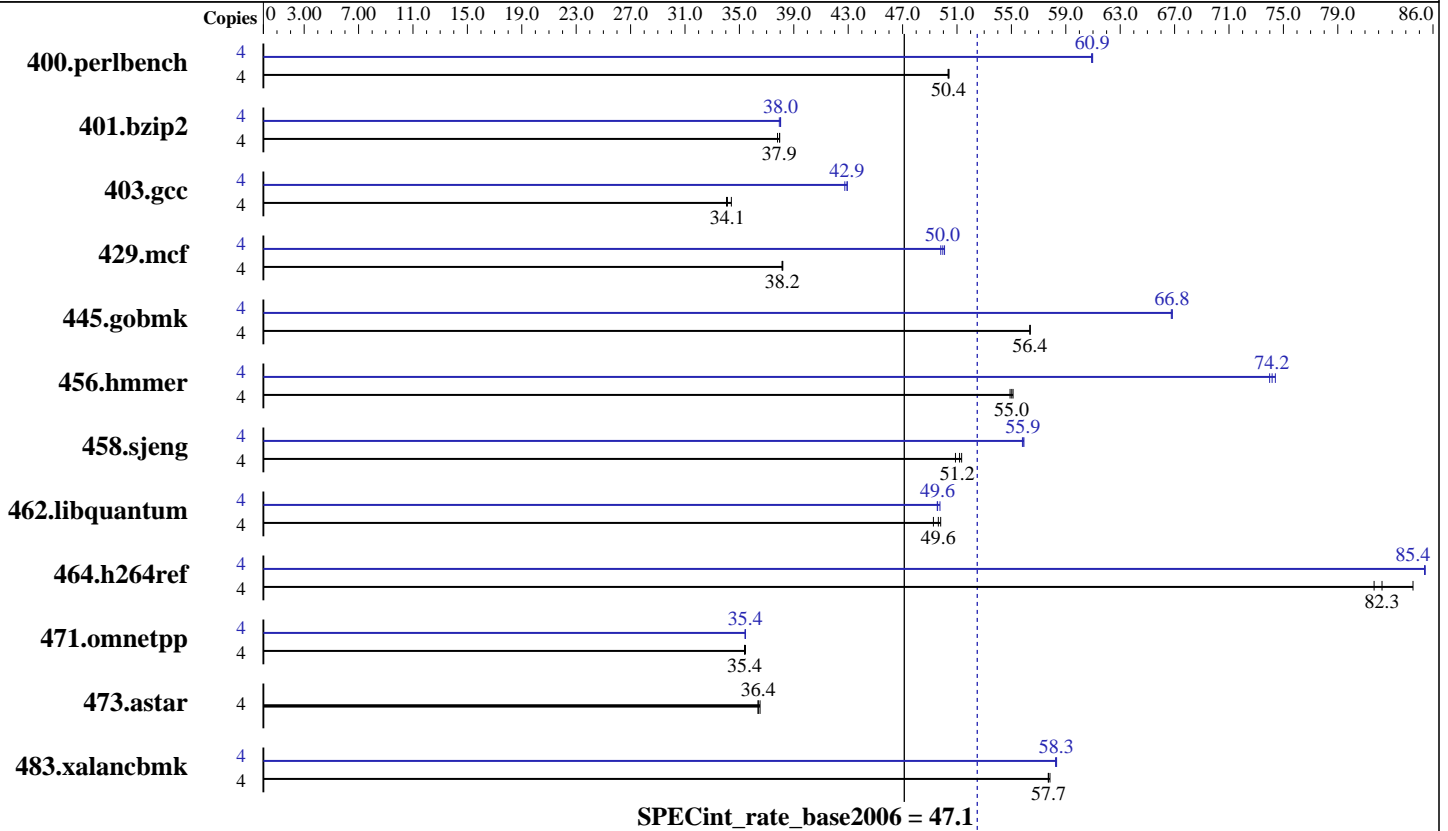

### Hardware

CPU Name: AMD Opteron 2220  
 CPU Characteristics:  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip  
 CPU(s) orderable: 1, 2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core  
 L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (8 x 2GB DDR2-5300 ECC)  
 Disk Subsystem: 1 x 36 GB SAS, 10000 RPM  
 Other Hardware: None

### Software

Operating System: SLES 10 (x86\_64), 2.6.16.21-0.8-smp  
 Compiler: QLogic PathScale Compiler Suite, Release 3.0  
 Auto Parallel: No  
 File System: ext3  
 System State: Multi-user, run level 3  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: MicroQuill SmartHeap 8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 52.5

IBM System x3655 (AMD Opteron 2220)

SPECint\_rate\_base2006 = 47.1

CPU2006 license: 11

Test date: Jul-2007

Test sponsor: IBM Corporation

Hardware Availability: Jan-2007

Tested by: IBM Corporation

Software Availability: Mar-2007

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	<b>776</b>	<b>50.4</b>	775	50.4	776	50.3	4	641	61.0	<b>641</b>	<b>60.9</b>	642	60.9
401.bzip2	4	1017	38.0	<b>1017</b>	<b>37.9</b>	1021	37.8	4	<b>1015</b>	<b>38.0</b>	1017	37.9	1015	38.0
403.gcc	4	936	34.4	<b>944</b>	<b>34.1</b>	946	34.1	4	750	42.9	<b>750</b>	<b>42.9</b>	753	42.8
429.mcf	4	955	38.2	<b>956</b>	<b>38.2</b>	956	38.1	4	<b>730</b>	<b>50.0</b>	728	50.1	732	49.8
445.gobmk	4	<b>744</b>	<b>56.4</b>	744	56.4	744	56.4	4	628	66.8	629	66.8	<b>628</b>	<b>66.8</b>
456.hmmmer	4	680	54.9	<b>678</b>	<b>55.0</b>	677	55.1	4	<b>503</b>	<b>74.2</b>	502	74.4	504	74.0
458.sjeng	4	951	50.9	943	51.3	<b>946</b>	<b>51.2</b>	4	865	55.9	867	55.8	<b>866</b>	<b>55.9</b>
462.libquantum	4	1682	49.3	1664	49.8	<b>1670</b>	<b>49.6</b>	4	1666	49.7	1673	49.5	<b>1672</b>	<b>49.6</b>
464.h264ref	4	<b>1076</b>	<b>82.3</b>	1084	81.7	1047	84.5	4	<b>1037</b>	<b>85.4</b>	1036	85.4	1037	85.4
471.omnetpp	4	705	35.4	<b>707</b>	<b>35.4</b>	707	35.4	4	<b>706</b>	<b>35.4</b>	705	35.4	706	35.4
473.astar	4	769	36.5	<b>772</b>	<b>36.4</b>	772	36.4	4	769	36.5	<b>772</b>	<b>36.4</b>	772	36.4
483.xalancbmk	4	477	57.8	478	57.7	<b>478</b>	<b>57.7</b>	4	<b>473</b>	<b>58.3</b>	473	58.3	474	58.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

taskset utility used to bind CPU(s) to processes

## Base Compiler Invocation

C benchmarks:  
pathcc

C++ benchmarks:  
pathCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 52.5

IBM System x3655 (AMD Opteron 2220)

SPECint\_rate\_base2006 = 47.1

CPU2006 license: 11

Test date: Jul-2007

Test sponsor: IBM Corporation

Hardware Availability: Jan-2007

Tested by: IBM Corporation

Software Availability: Mar-2007

## Base Optimization Flags

C benchmarks:

-Ofast -OPT:malloc\_alg=1

C++ benchmarks:

-Ofast -m32 -L/tools/SmartHeap\_8.1/lib -lsmartheap

## Base Other Flags

C benchmarks:

-IPA:max\_jobs=2

C++ benchmarks:

-IPA:max\_jobs=2

## Peak Compiler Invocation

C benchmarks:

pathcc

C++ benchmarks:

pathCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalanbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-LNO:opt=0

401.bzip2: -O3 -LNO:ou\_prod\_max=10 -OPT:Ofast -OPT:alias=disjoint

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 52.5

IBM System x3655 (AMD Opteron 2220)

SPECint\_rate\_base2006 = 47.1

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2007

Hardware Availability: Jan-2007

Software Availability: Mar-2007

## Peak Optimization Flags (Continued)

403.gcc: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -m32 -O3  
-OPT:Ofast

429.mcf: -m32 -O3 -ipa -L/tools/SmartHeap\_8.1/lib -lsmartheap

445.gobmk: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-OPT:alias=disjoint -LNO:simd=0 -LNO:minvariant=off  
-WOPT:retype\_expr=on

456.hmmr: -O2 -OPT:alias=disjoint -OPT:malloc\_alg=1 -CG:cflow=0

458.sjeng: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-IPA:plimit=50000 -IPA:pu\_reorder=2

462.libquantum: -O3 -ipa -CG:local\_fwd\_sched=on -IPA:space=1000

464.h264ref: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-IPA:plimit=20000 -OPT:alias=disjoint -LNO:prefetch=0

C++ benchmarks:

471.omnetpp: -Ofast -CG:gcm=off -m32  
-L/tools/SmartHeap\_8.1/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -Ofast -m32 -OPT:unroll\_times\_max=8  
-L/tools/SmartHeap\_8.1/lib -lsmartheap

## Peak Other Flags

C benchmarks:

-IPA:max\_jobs=2

C++ benchmarks:

-IPA:max\_jobs=2

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.13.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.13.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.13.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.13.xml)



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 52.5

IBM System x3655 (AMD Opteron 2220)

SPECint\_rate\_base2006 = 47.1

CPU2006 license: 11

Test date: Jul-2007

Test sponsor: IBM Corporation

Hardware Availability: Jan-2007

Tested by: IBM Corporation

Software Availability: Mar-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 12:23:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 21 August 2007.