



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®_rate2006 = 72.0

IBM BladeCenter HS21 (Intel Xeon E5320)

SPECint_rate_base2006 = 67.2

CPU2006 license: 11


Test date: Aug-2007

Test sponsor: IBM Corporation

Hardware Availability: Feb-2007

Tested by: IBM Corporation

Software Availability: Jul-2007

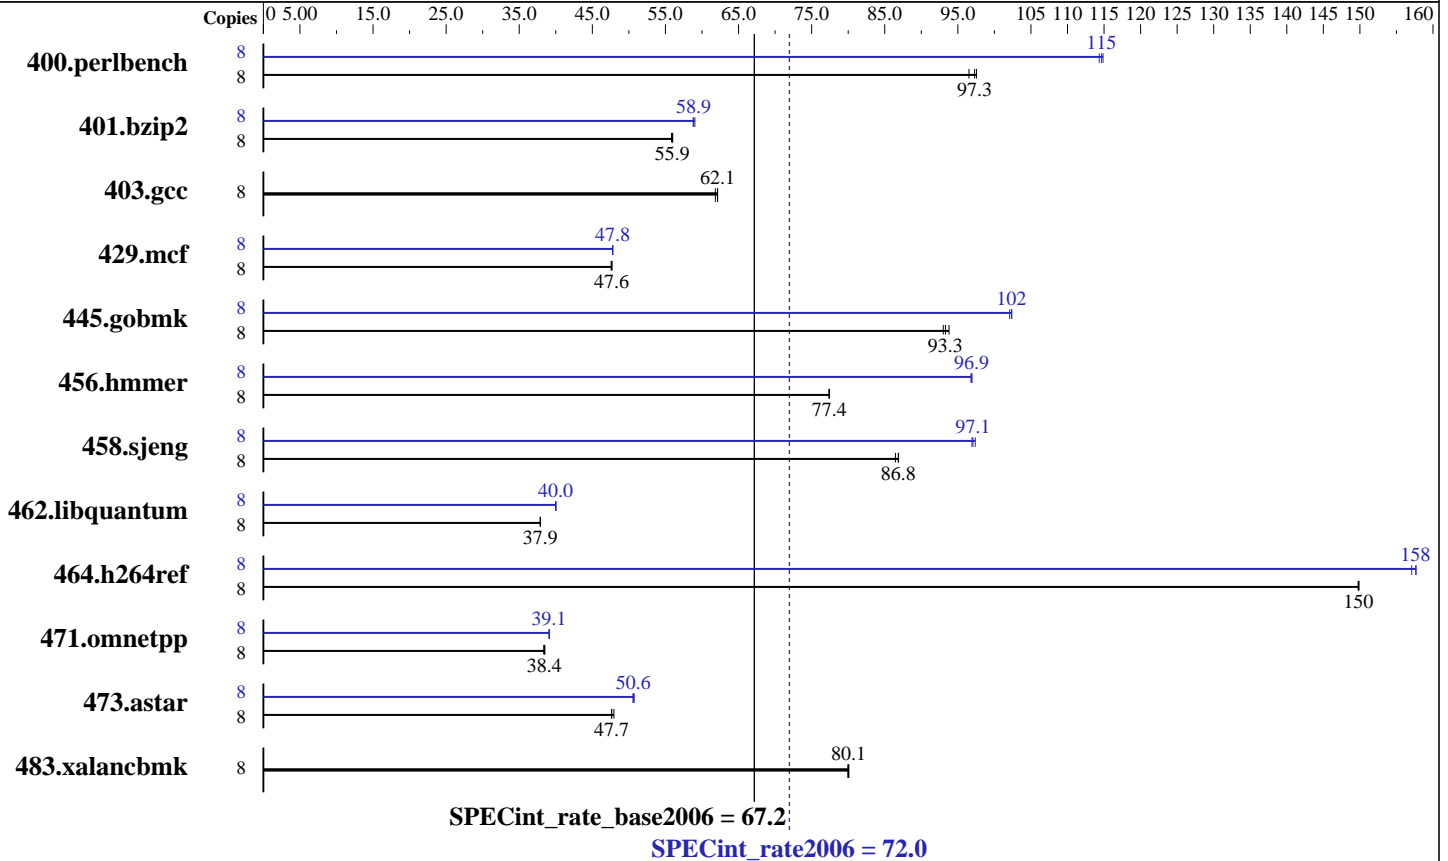

Hardware

CPU Name: Intel Xeon E5320
 CPU Characteristics: 1066MHz system bus
 CPU MHz: 1866
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8 x 2GB DDR2-5300F ECC)
 Disk Subsystem: 1 x 36 GB SAS, 10000 RPM
 Other Hardware: Memory and I/O Expansion Unit (P/N 42C1600)

Software

Operating System: SLES 10 (x86_64), 2.6.16.21-0.8-smp
 Compiler: Intel C++ Compiler for Linux version 10.0
 Build 20070426 Package ID: 1_cc_p_10.0.023
 Auto Parallel: No
 File System: ReiserFS
 System State: Multi-user, run level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap 8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 72.0

IBM BladeCenter HS21 (Intel Xeon E5320)

SPECint_rate_base2006 = 67.2

CPU2006 license: 11

Test date: Aug-2007

Test sponsor: IBM Corporation

Hardware Availability: Feb-2007

Tested by: IBM Corporation

Software Availability: Jul-2007

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	801	97.6	803	97.3	810	96.5	8	684	114	680	115	682	115
401.bzip2	8	1380	55.9	1383	55.8	1379	56.0	8	1308	59.0	1313	58.8	1311	58.9
403.gcc	8	1036	62.1	1042	61.8	1037	62.1	8	1036	62.1	1042	61.8	1037	62.1
429.mcf	8	1530	47.7	1534	47.6	1531	47.6	8	1526	47.8	1528	47.8	1526	47.8
445.gobmk	8	895	93.8	902	93.0	899	93.3	8	820	102	820	102	822	102
456.hammer	8	965	77.4	964	77.4	964	77.4	8	770	96.9	770	96.9	771	96.8
458.sjeng	8	1115	86.8	1114	86.9	1120	86.5	8	999	96.9	997	97.1	994	97.4
462.libquantum	8	4376	37.9	4375	37.9	4375	37.9	8	4144	40.0	4145	40.0	4143	40.0
464.h264ref	8	1181	150	1182	150	1182	150	8	1123	158	1127	157	1123	158
471.omnetpp	8	1301	38.4	1298	38.5	1304	38.4	8	1279	39.1	1279	39.1	1278	39.1
473.astar	8	1179	47.7	1179	47.6	1171	48.0	8	1110	50.6	1111	50.6	1107	50.7
483.xalancbmk	8	689	80.1	689	80.1	690	79.9	8	689	80.1	689	80.1	690	79.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

taskset utility used to bind CPU(s) to processes

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fast

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 72.0

IBM BladeCenter HS21 (Intel Xeon E5320)

SPECint_rate_base2006 = 67.2

CPU2006 license: 11

Test date: Aug-2007

Test sponsor: IBM Corporation

Hardware Availability: Feb-2007

Tested by: IBM Corporation

Software Availability: Jul-2007

Base Optimization Flags (Continued)

C++ benchmarks:

```
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/spec/cpu2006.1.0/lib -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

```
401.bzip2: /opt/intel/cce/10.0.023/bin/icc
-L/opt/intel/cce/10.0.023/lib
-I/opt/intel/cce/10.0.023/include
```

```
456.hmmer: /opt/intel/cce/10.0.023/bin/icc
-L/opt/intel/cce/10.0.023/lib
-I/opt/intel/cce/10.0.023/include
```

C++ benchmarks:

icpc

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 72.0

IBM BladeCenter HS21 (Intel Xeon E5320)

SPECint_rate_base2006 = 67.2

CPU2006 license: 11

Test date: Aug-2007

Test sponsor: IBM Corporation

Hardware Availability: Feb-2007

Tested by: IBM Corporation

Software Availability: Jul-2007

Peak Optimization Flags (Continued)

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast

403.gcc: basepeak = yes

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec_div -ansi-alias

456.hmmer: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -Ob0
-prefetch -opt-streaming-stores always

464.h264ref: Same as 456.hmmer

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec_div -ansi-alias -Wl,-z,muldefs
-L/spec/cpu2006.1.0/lib -lsmartheap

473.astar: Same as 471.omnetpp

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.45.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.45.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 72.0

IBM BladeCenter HS21 (Intel Xeon E5320)

SPECint_rate_base2006 = 67.2

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2007

Hardware Availability: Feb-2007

Software Availability: Jul-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 13:04:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 September 2007.