SPEC® CINT2006 Result

Dell Inc.

Dell Precision M6300 (Intel X7900, 2.80 GHz)

SPECint®2006 = 19.2

SPECint_base2006 = 17.6

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Aug-2007
Hardware Availability: Aug-2007
Software Availability: Jun-2007

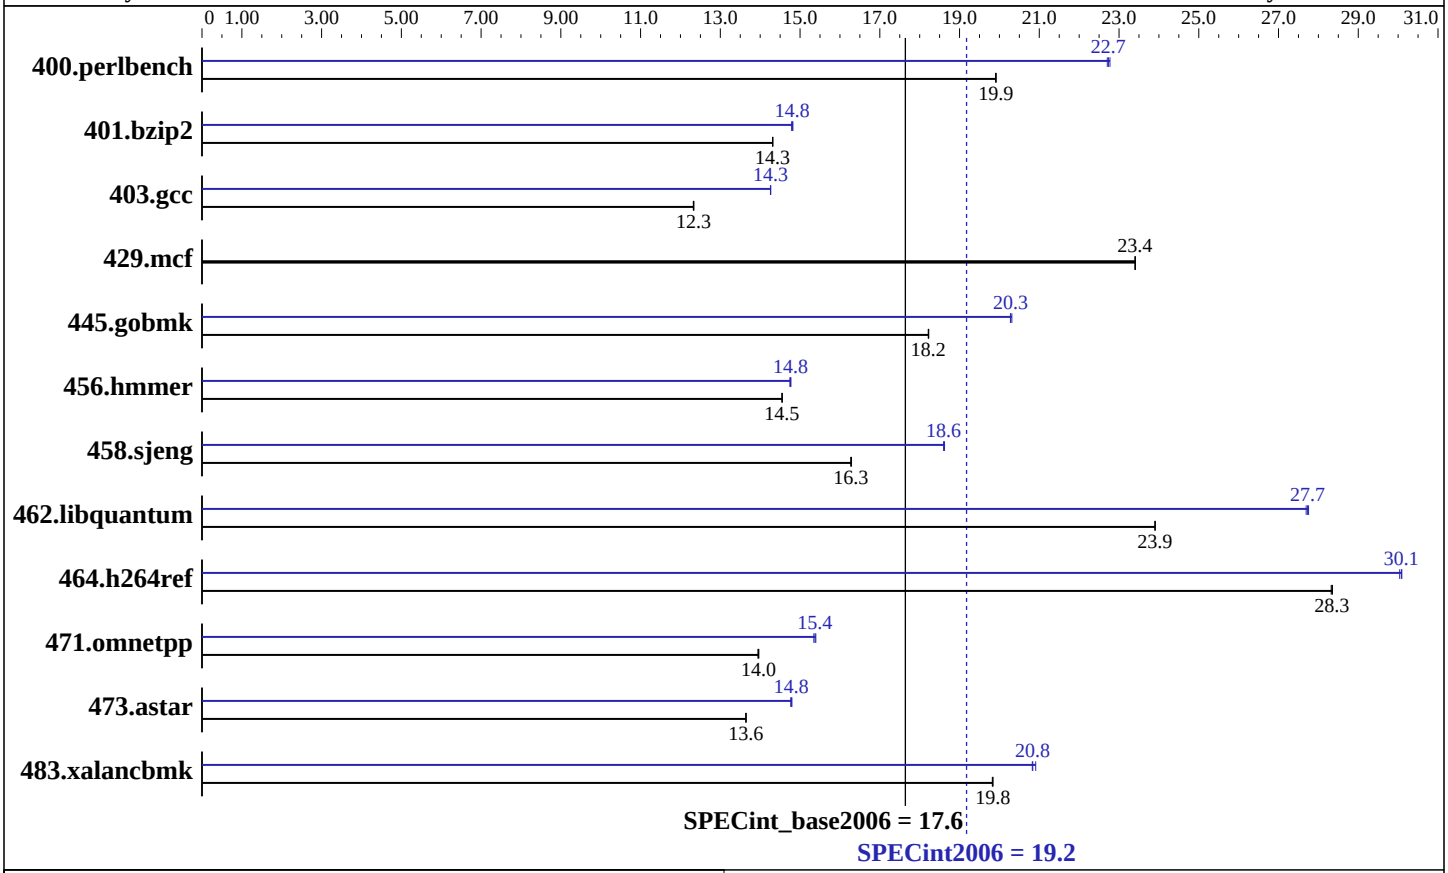

Hardware

CPU Name:	Intel Core 2 Extreme X7900
CPU Characteristics:	800 MHz Bus Speed
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per chip
L3 Cache:	None
Other Cache:	None
Memory:	4 GB (2x2 GB 667 MHz CL5 DDR2)
Disk Subsystem:	1 x 120GB SATA 7200 RPM
Other Hardware:	None

Software

Operating System:	Windows XP Professional x64 Edition SP2
Compiler:	Intel C++ Compiler for IA-32, Version 10.0 Build 20070426 Package ID: W_CC_P_10.0.025 Microsoft Visual Studio 2005 SP1
Auto Parallel:	No
File System:	NTFS
System State:	--
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	MicroQuill SmartHeap Library 8.0

SPEC CINT2006 Result

Dell Inc.

Dell Precision M6300 (Intel X7900, 2.80 GHz)

SPECint2006 = 19.2

SPECint_base2006 = 17.6

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Aug-2007
Hardware Availability: Aug-2007
Software Availability: Jun-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	**491**	**19.9**	491	19.9	491	19.9	430	22.7	429	22.8	**430**	**22.7**
401.bzip2	674	14.3	674	14.3	**674**	**14.3**	**652**	**14.8**	651	14.8	653	14.8
403.gcc	652	12.3	653	12.3	**653**	**12.3**	**565**	**14.3**	564	14.3	565	14.3
429.mcf	**390**	**23.4**	390	23.4	390	23.4	**390**	**23.4**	390	23.4	390	23.4
445.gobmk	576	18.2	**576**	**18.2**	575	18.2	**517**	**20.3**	516	20.3	517	20.3
456.hmmer	641	14.6	641	14.5	**641**	**14.5**	632	14.8	633	14.7	**632**	**14.8**
458.sjeng	743	16.3	**743**	**16.3**	744	16.3	650	18.6	**650**	**18.6**	650	18.6
462.libquantum	867	23.9	867	23.9	**867**	**23.9**	747	27.8	748	27.7	**747**	**27.7**
464.h264ref	781	28.3	781	28.4	**781**	**28.3**	**736**	**30.1**	737	30.0	735	30.1
471.omnetpp	448	14.0	448	13.9	**448**	**14.0**	406	15.4	**406**	**15.4**	407	15.3
473.astar	**514**	**13.6**	514	13.6	515	13.6	474	14.8	**475**	**14.8**	475	14.8
483.xalancbmk	348	19.8	**348**	**19.8**	348	19.8	330	20.9	**331**	**20.8**	331	20.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Binaries were built on Windows Vista Ultimate (64-bit)
```

Base Compiler Invocation

C benchmarks:

```
icl -Qstd=c99
```

C++ benchmarks:

```
icl
```

Base Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`

Base Optimization Flags

C benchmarks:

```
-fast /F512000000 shlw32m.lib            -link /FORCE:MULTIPLE
```

C++ benchmarks:

```
-fast -Qcxx_features /F512000000 shlw32m.lib
            -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks:
`icl -Qstd=c99`

C++ benchmarks:
`icl`

Peak Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`

Peak Optimization Flags

C benchmarks:

400.perlbench: `ONESTEP -Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast -Qansi-alias -Qprefetch /F512000000 shlw32m.lib -link /FORCE:MULTIPLE`

401.bzip2: `ONESTEP -Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast /F512000000 shlw32m.lib -link /FORCE:MULTIPLE`

403.gcc: `ONESTEP -Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast /F512000000 -link /FORCE:MULTIPLE`

429.mcf: `basepeak = yes`

445.gobmk: `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-QxT -O2 -Qipo -Qprec-div- -Qansi-alias /F512000000 -link /FORCE:MULTIPLE`

456.hmmer: `ONESTEP -Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast -Qunroll2 -Qansi-alias /F512000000 shlw32m.lib -link /FORCE:MULTIPLE`

458.sjeng: `ONESTEP -Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-fast -Qunroll4 /F512000000 shlw32m.lib -link /FORCE:MULTIPLE`

Continued on next page

Peak Optimization Flags (Continued)

462.libquantum: ONESTEP -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll4 -Ob0 -Qprefetch -Qopt-streaming-stores:always /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

464.h264ref: Same as 456.hmmer

C++ benchmarks:
ONESTEP -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias -Qcxx_features /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/dell.ic10.windows.flags.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/dell.ic10.windows.flags.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 13:17:56 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 September 2007.