



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge 2950 (Intel Xeon E5345,  
2.33 GHz)

SPECint<sup>®</sup>\_rate2006 = 98.0

SPECint\_rate\_base2006 = 86.5

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2007

Hardware Availability: Dec-2006

Software Availability: Nov-2007

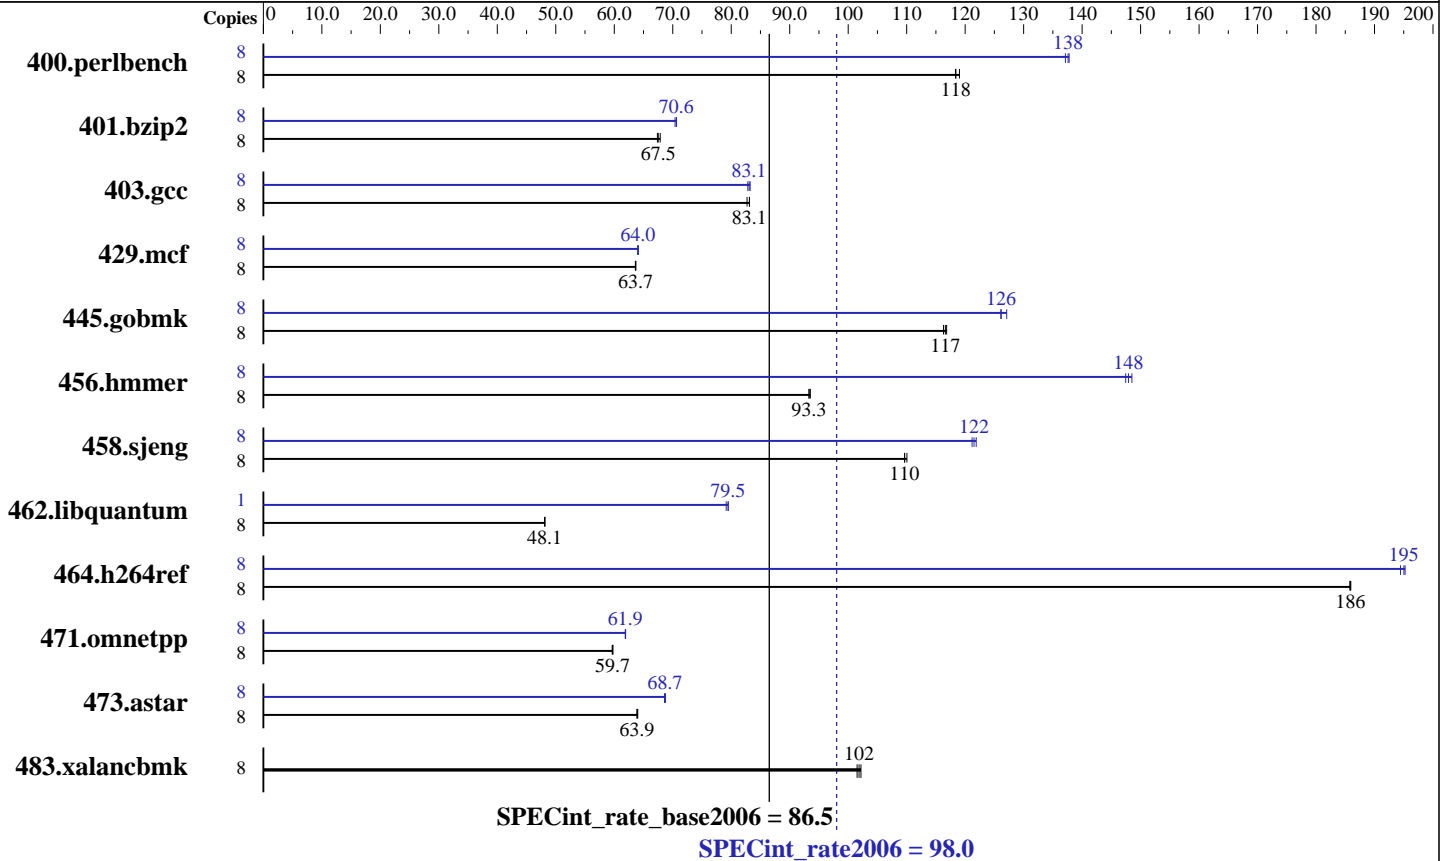

### Hardware

CPU Name: Intel Xeon E5345  
 CPU Characteristics: 1333MHz system bus  
 CPU MHz: 2333  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (8x2 GB 667 MHz ECC CL5 FB-DIMM)  
 Disk Subsystem: 1 x 73 GB SAS 15k RPM  
 Other Hardware: None

### Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 10  
 Compiler: Intel C++ Compiler for Linux32 and Linux64 version 10.1 Build 20070725  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Multi-user, run level 3  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap library V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 98.0

PowerEdge 2950 (Intel Xeon E5345, 2.33 GHz)

SPECint\_rate\_base2006 = 86.5

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Sep-2007  
Hardware Availability: Dec-2006  
Software Availability: Nov-2007

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	660	118	<b>660</b>	<b>118</b>	657	119	8	570	137	567	138	<b>568</b>	<b>138</b>
401.bzip2	8	1146	67.4	1138	67.9	<b>1143</b>	<b>67.5</b>	8	1097	70.4	<b>1093</b>	<b>70.6</b>	1093	70.6
403.gcc	8	775	83.1	779	82.7	<b>775</b>	<b>83.1</b>	8	<b>775</b>	<b>83.1</b>	774	83.2	777	82.8
429.mcf	8	1146	63.7	1147	63.6	<b>1146</b>	<b>63.7</b>	8	1138	64.1	<b>1139</b>	<b>64.0</b>	1140	64.0
445.gobmk	8	722	116	<b>720</b>	<b>117</b>	718	117	8	<b>665</b>	<b>126</b>	666	126	660	127
456.hammer	8	798	93.5	<b>800</b>	<b>93.3</b>	800	93.3	8	506	147	<b>505</b>	<b>148</b>	503	149
458.sjeng	8	880	110	<b>883</b>	<b>110</b>	883	110	8	<b>797</b>	<b>122</b>	794	122	799	121
462.libquantum	8	3444	48.1	<b>3445</b>	<b>48.1</b>	3445	48.1	1	261	79.5	262	79.1	<b>261</b>	<b>79.5</b>
464.h264ref	8	<b>952</b>	<b>186</b>	952	186	953	186	8	907	195	910	194	<b>908</b>	<b>195</b>
471.omnetpp	8	837	59.8	838	59.6	<b>837</b>	<b>59.7</b>	8	807	61.9	<b>808</b>	<b>61.9</b>	808	61.9
473.astar	8	877	64.0	<b>879</b>	<b>63.9</b>	879	63.9	8	<b>818</b>	<b>68.7</b>	819	68.6	817	68.8
483.xalancbmk	8	540	102	544	102	<b>542</b>	<b>102</b>	8	540	102	544	102	<b>542</b>	<b>102</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

OMP\_NUM\_THREADS set to number of cores  
KMP\_STACK\_SIZE set to 64M  
KMP\_AFFINITY set to physical,0

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
'/usr/bin/taskset' used to bind processes to CPUs

## Platform Notes

BIOS Settings:  
Adjacent Cache Line Prefetch = Disabled (default Enabled)  
Hardware Prefetcher = Disabled (default Enabled)

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECint\_rate2006 = 98.0**

PowerEdge 2950 (Intel Xeon E5345,  
2.33 GHz)

**SPECint\_rate\_base2006 = 86.5**

**CPU2006 license:** 55

**Test date:** Sep-2007

**Test sponsor:** Dell Inc.

**Hardware Availability:** Dec-2006

**Tested by:** Dell Inc.

**Software Availability:** Nov-2007

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:  
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc

401.bzip2: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc  
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib  
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include

456.hmmer: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc  
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib  
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include

C++ benchmarks:  
icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECint\_rate2006 = 98.0**

PowerEdge 2950 (Intel Xeon E5345,  
2.33 GHz)

**SPECint\_rate\_base2006 = 86.5**

**CPU2006 license:** 55

**Test date:** Sep-2007

**Test sponsor:** Dell Inc.

**Hardware Availability:** Dec-2006

**Tested by:** Dell Inc.

**Software Availability:** Nov-2007

## Peak Portability Flags (Continued)

483.xalanbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias  
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo  
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch  
-opt-streaming-stores always -vec-guard-write  
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=block  
-Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
-Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

483.xalanbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge 2950 (Intel Xeon E5345,  
2.33 GHz)

**SPECint\_rate2006 = 98.0**

**SPECint\_rate\_base2006 = 86.5**

**CPU2006 license:** 55  
**Test sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test date:** Sep-2007  
**Hardware Availability:** Dec-2006  
**Software Availability:** Nov-2007

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090713.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090713.02.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 13:53:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 October 2007.