



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint[®]_rate2006 = 122

IBM System p 570 (4.7 GHz, 4 core, RHEL)

SPECint_rate_base2006 = 108

CPU2006 license: 11


Test date: Oct-2007

Test sponsor: IBM Corporation

Hardware Availability: Jun-2007

Tested by: IBM Corporation

Software Availability: Oct-2007

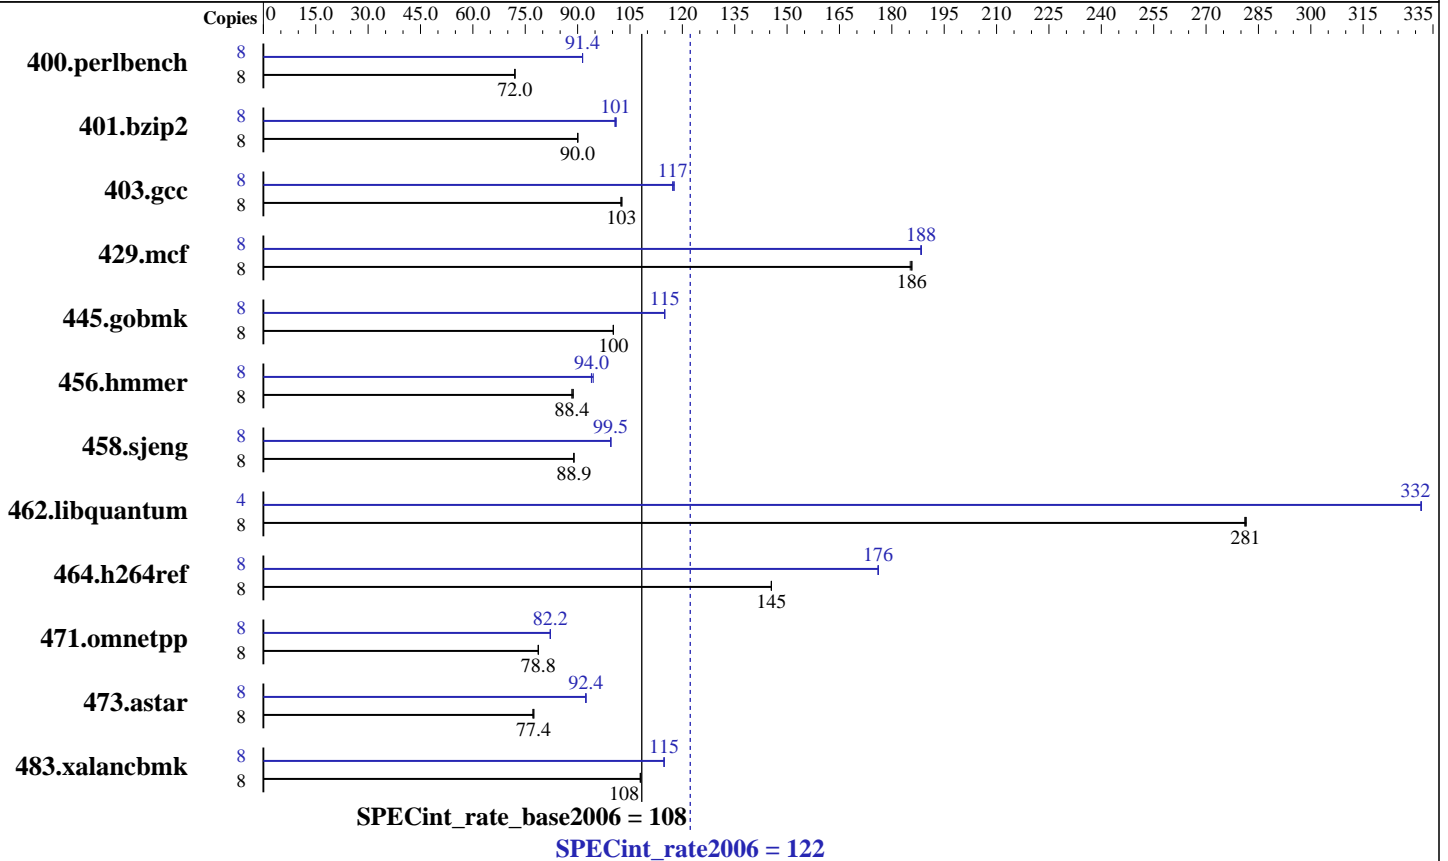

Hardware

CPU Name: POWER6
 CPU Characteristics:
 CPU MHz: 4700
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4,8,12,16 cores
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per core
 L3 Cache: 32 MB I+D off chip per chip
 Other Cache: None
 Memory: 32 GB (16x2 GB) DDR2 667 MHz
 Disk Subsystem: 2x73 GB SAS 15K RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Advanced Platform 5.1 for IBM POWER
 Compiler: IBM XL C/C++ Advanced Edition for Linux, V9.0
 Auto Parallel: No
 File System: ext3
 System State: Multi-User
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: -IBM Post-Link Optimization for Linux on POWER, Version 5.4.0-10
 -MicroQuill SmartHeap 8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 122

IBM System p 570 (4.7 GHz, 4 core, RHEL)

SPECint_rate_base2006 = 108

CPU2006 license: 11

Test date: Oct-2007

Test sponsor: IBM Corporation

Hardware Availability: Jun-2007

Tested by: IBM Corporation

Software Availability: Oct-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	<u>1085</u>	<u>72.0</u>	1085	72.1	1085	72.0	8	<u>855</u>	<u>91.4</u>	855	91.4	855	91.4
401.bzip2	8	<u>858</u>	<u>90.0</u>	858	90.0	857	90.1	8	<u>765</u>	<u>101</u>	764	101	767	101
403.gcc	8	629	102	627	103	<u>628</u>	<u>103</u>	8	549	117	547	118	<u>548</u>	<u>117</u>
429.mcf	8	394	185	393	186	<u>393</u>	<u>186</u>	8	387	188	387	188	<u>387</u>	<u>188</u>
445.gobmk	8	837	100	<u>837</u>	<u>100</u>	838	100	8	<u>730</u>	<u>115</u>	730	115	730	115
456.hmmmer	8	<u>844</u>	<u>88.4</u>	844	88.4	841	88.8	8	794	94.0	790	94.5	<u>794</u>	<u>94.0</u>
458.sjeng	8	1088	88.9	1089	88.9	<u>1088</u>	<u>88.9</u>	8	973	99.5	<u>973</u>	<u>99.5</u>	973	99.5
462.libquantum	8	<u>589</u>	<u>281</u>	590	281	589	282	4	250	332	<u>250</u>	<u>332</u>	250	332
464.h264ref	8	1217	146	1217	145	<u>1217</u>	<u>145</u>	8	1005	176	1006	176	<u>1005</u>	<u>176</u>
471.omnetpp	8	<u>635</u>	<u>78.8</u>	635	78.7	635	78.8	8	608	82.2	<u>608</u>	<u>82.2</u>	609	82.2
473.astar	8	728	77.2	<u>725</u>	<u>77.4</u>	725	77.5	8	608	92.3	608	92.4	<u>608</u>	<u>92.4</u>
483.xalancbmk	8	<u>511</u>	<u>108</u>	511	108	511	108	8	<u>481</u>	<u>115</u>	481	115	481	115

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

kernel release 2.6.18-52.el5.

See flags file for details on following settings.

ulimit -s (stack) set to 262144.

System set to Enhanced mode when defining partition on HMC

Large pages reserved as follows by root user:

```
echo 800 > /proc/sys/vm/nr_hugepages
```

System configured with libhugetlbfs library for application access to large pages

Environment variables set before executing benchmarks.

```
export HUGETLB_VERBOSE=0
export HUGETLB_MORECORE=yes
export XLFRTIOPTS=intrinthds=1
```

fdpr binary optimization tool used for

```
400.perlbench 401.bzip2 403.gcc 429.mcf 456.hmmmer 458.sjeng
462.libquantum 464.h264ref 473.astar 483.xalancbmk
```

Benchmarks bound to a processor using numactl on the submit command.



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 122

IBM System p 570 (4.7 GHz, 4 core, RHEL)

SPECint_rate_base2006 = 108

CPU2006 license: 11

Test date: Oct-2007

Test sponsor: IBM Corporation

Hardware Availability: Jun-2007

Tested by: IBM Corporation

Software Availability: Oct-2007

Base Compiler Invocation

C benchmarks:

xlc -qlanglvl=extc99

C++ benchmarks:

xlC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_PPC
462.libquantum: -DSPEC_CPU_LINUX
464.h264ref: -qchars=signed
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-O5 -qalias=noansi -qalloca -lhugetlbfs

C++ benchmarks:

-O5 -qrtti -lsmartheap

Base Other Flags

C benchmarks:

-qipa=noobject -qipa=threads

C++ benchmarks:

-qipa=noobject -qipa=threads

Peak Compiler Invocation

C benchmarks:

xlc -qlanglvl=extc99

C++ benchmarks:

xlC



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 122

IBM System p 570 (4.7 GHz, 4 core, RHEL)

SPECint_rate_base2006 = 108

CPU2006 license: 11

Test date: Oct-2007

Test sponsor: IBM Corporation

Hardware Availability: Jun-2007

Tested by: IBM Corporation

Software Availability: Oct-2007

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_PPC
 403.gcc: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LINUX
 464.h264ref: -qchars=signed
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qalias=noansi
 -lsmartheap

401.bzip2: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -lhugetlbfs

403.gcc: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qalloca -q64
 -lhugetlbfs

429.mcf: -Wl,-q -O5 -qnoenablevmx -lhugetlbfs

445.gobmk: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qnoenablevmx
 -lhugetlbfs

456.hmmer: Same as 401.bzip2

458.sjeng: Same as 401.bzip2

462.libquantum: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qnoenablevmx
 -q64 -lhugetlbfs

464.h264ref: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -q64
 -lhugetlbfs

C++ benchmarks:

471.omnetpp: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qrtti -lsmartheap

473.astar: -Wl,-q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qnoenablevmx
 -lsmartheap

483.xalancbmk: -Wl,-q -O4 -lsmartheap

Peak Other Flags

C benchmarks:

-qipa=noobject -qipa=threads

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 122

IBM System p 570 (4.7 GHz, 4 core, RHEL)

SPECint_rate_base2006 = 108

CPU2006 license: 11

Test date: Oct-2007

Test sponsor: IBM Corporation

Hardware Availability: Jun-2007

Tested by: IBM Corporation

Software Availability: Oct-2007

Peak Other Flags (Continued)

C++ benchmarks:

-qipa=noobject -qipa=threads

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/lop-xl-flags.20090714.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/lop-xl-flags.20090714.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:30:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 November 2007.