



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX300 S4, Intel Xeon processor E5440,
2.83 GHz

SPECint_rate2006 = 105

SPECint_rate_base2006 = 105

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Oct-2007

Hardware Availability: Dec-2007

Software Availability: Nov-2007

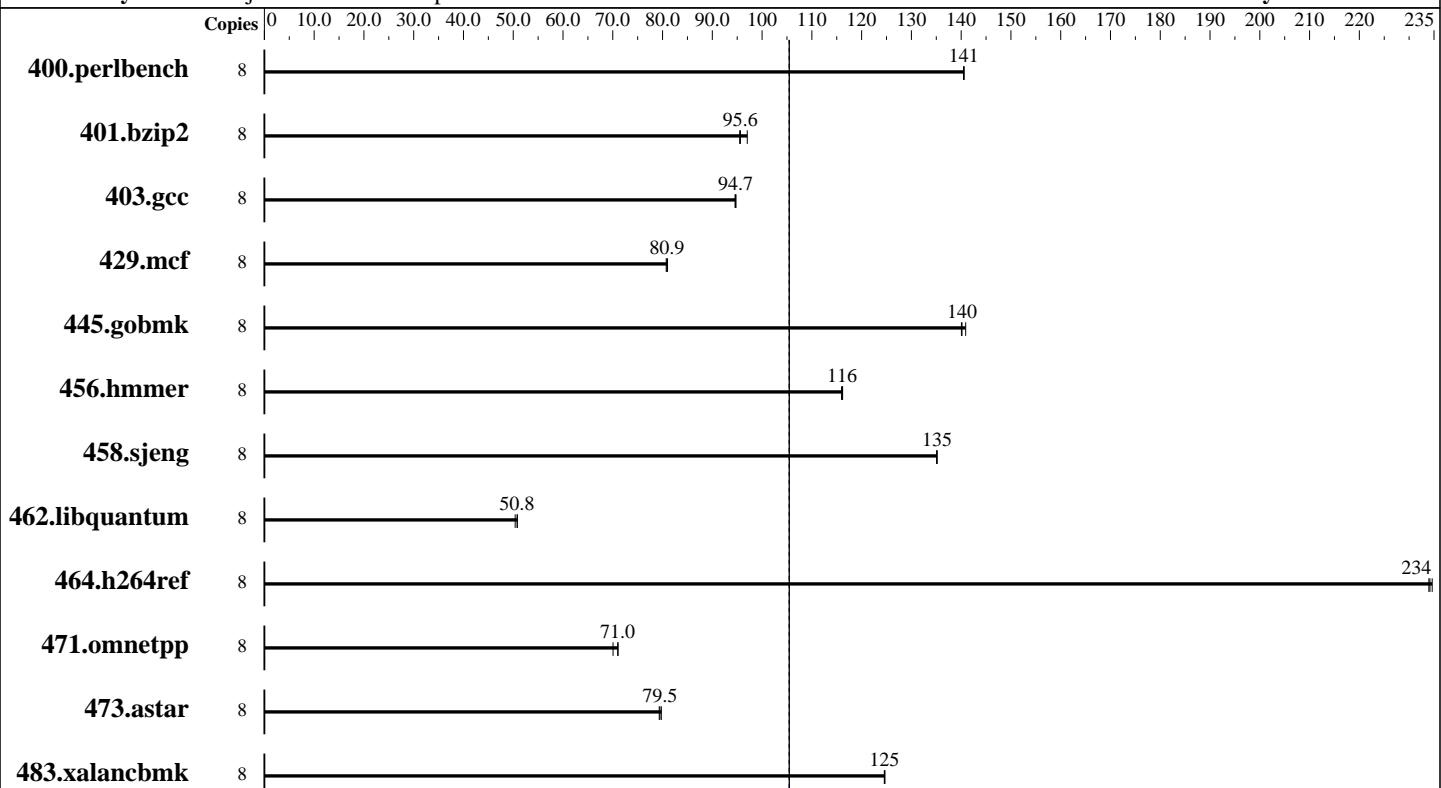

SPECint_rate_base2006 = 105

SPECint_rate2006 = 105

Hardware

CPU Name:	Intel Xeon E5440
CPU Characteristics:	1333 MHz system bus
CPU MHz:	2833
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8x2 GB PC2-5300F, 2 rank, CAS 5-5-5, with ECC)
Disk Subsystem:	Seagate ST973451SS (SAS, 73GB, 15000rpm)
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler for Linux32 and Linux64 Version 10.1 - Build 20070725
Auto Parallel:	No
File System:	ext2
System State:	Multiuser, Runlevel 3
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	Smart Heap Library, Version 8.1 binutils-2.17.tar.gz, Version 2.17



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX300 S4, Intel Xeon processor E5440,
2.83 GHz

SPECint_rate2006 = 105

SPECint_rate_base2006 = 105

CPU2006 license: 22

Test date: Oct-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Dec-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	556	140	556	141	556	141	8	556	140	556	141	556	141
401.bzip2	8	807	95.6	808	95.5	796	97.0	8	807	95.6	808	95.5	796	97.0
403.gcc	8	680	94.7	681	94.6	680	94.8	8	680	94.7	681	94.6	680	94.8
429.mcf	8	902	80.9	901	81.0	904	80.7	8	902	80.9	901	81.0	904	80.7
445.gobmk	8	599	140	599	140	596	141	8	599	140	599	140	596	141
456.hammer	8	643	116	642	116	644	116	8	643	116	642	116	644	116
458.sjeng	8	716	135	717	135	716	135	8	716	135	717	135	716	135
462.libquantum	8	3289	50.4	3264	50.8	3261	50.8	8	3289	50.4	3264	50.8	3261	50.8
464.h264ref	8	755	235	757	234	756	234	8	755	235	757	234	756	234
471.omnetpp	8	714	70.1	704	71.0	704	71.1	8	714	70.1	704	71.0	704	71.1
473.astar	8	708	79.3	704	79.8	707	79.5	8	708	79.3	704	79.8	707	79.5
483.xalancbmk	8	443	125	443	125	443	125	8	443	125	443	125	443	125

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

This result has been produced with binaries provided and compiled by Intel.

BIOS configuration:

Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:
 icc

C++ benchmarks:
 icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX300 S4, Intel Xeon processor E5440,
2.83 GHz

SPECint_rate2006 = 105

SPECint_rate_base2006 = 105

CPU2006 license: 22

Test date: Oct-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Dec-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Base Optimization Flags

C benchmarks:

```
-fast -inline-calloc -opt-malloc-options=3
```

C++ benchmarks:

```
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/home/cmpllr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: basepeak = yes
```

```
401.bzip2: basepeak = yes
```

```
403.gcc: basepeak = yes
```

```
429.mcf: basepeak = yes
```

```
445.gobmk: basepeak = yes
```

```
456.hmmer: basepeak = yes
```

```
458.sjeng: basepeak = yes
```

```
462.libquantum: basepeak = yes
```

```
464.h264ref: basepeak = yes
```

C++ benchmarks:

```
471.omnetpp: basepeak = yes
```

```
473.astar: basepeak = yes
```

```
483.xalancbmk: basepeak = yes
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX300 S4, Intel Xeon processor E5440,
2.83 GHz

SPECint_rate2006 = 105

SPECint_rate_base2006 = 105

CPU2006 license: 22

Test date: Oct-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Dec-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090713.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090713.02.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 14:33:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 November 2007.