



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

PRIMERGY RX200 S4, Intel Xeon processor E5440, 2.83 GHz

**SPECint®\_rate2006 = 106**

**SPECint\_rate\_base2006 = 106**

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Nov-2007

Hardware Availability: Dec-2007

Software Availability: Nov-2007

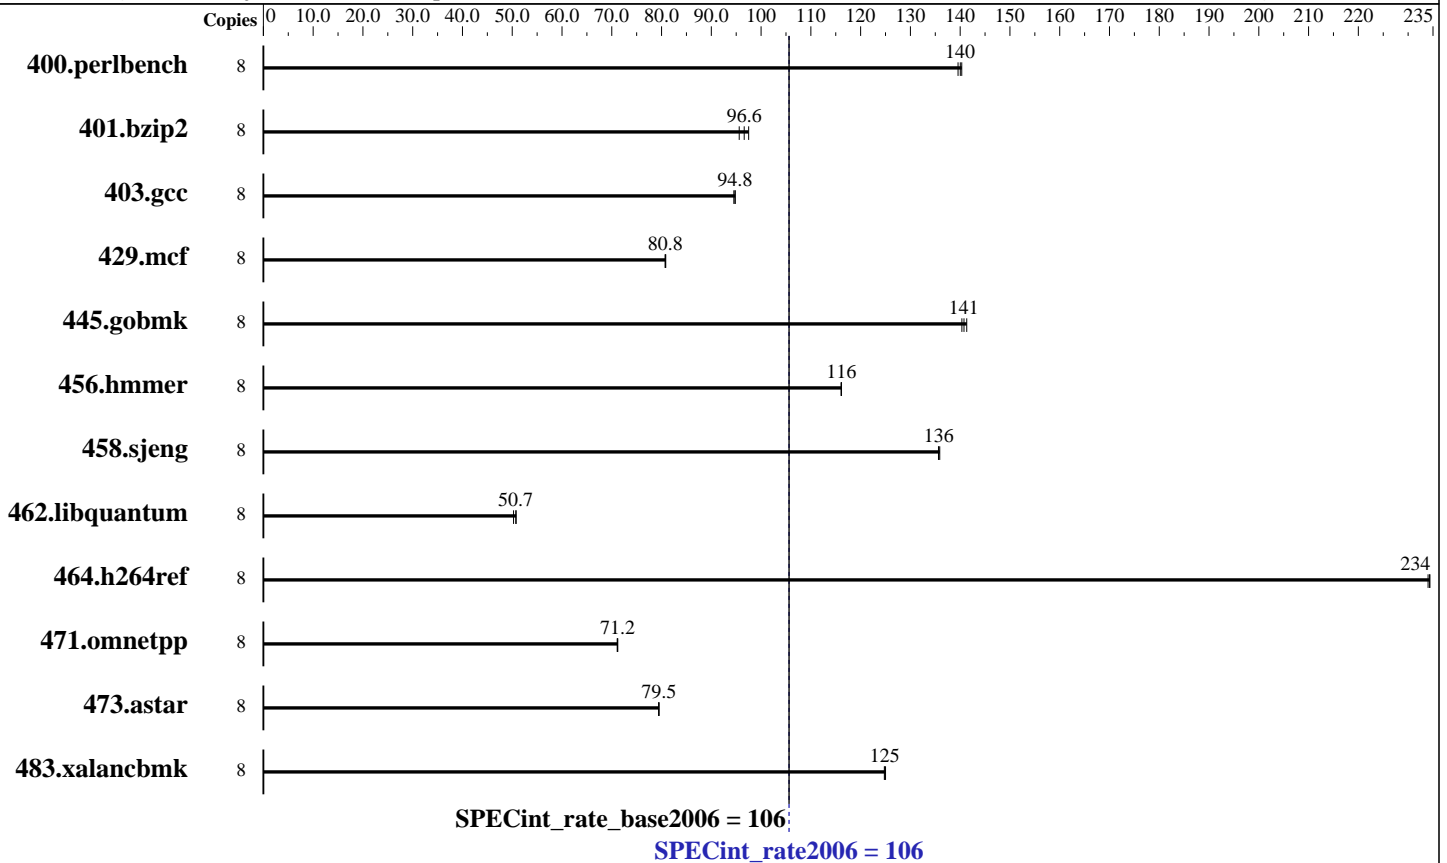

### Hardware

CPU Name: Intel Xeon E5440  
 CPU Characteristics: 1333 MHz system bus  
 CPU MHz: 2833  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (8x2 GB PC2-5300F, 2 rank, CAS 5-5-5, with ECC)  
 Disk Subsystem: Seagate ST973451SS (SAS, 73GB, 15000rpm)  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: Intel C++ Compiler for Linux32 and Linux64 Version 10.1 - Build 20070725  
 Auto Parallel: No  
 File System: ext2  
 System State: Multiuser, Runlevel 3  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: Smart Heap Library, Version 8.1  
 binutils-2.17.tar.gz, Version 2.17



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

PRIMERGY RX200 S4, Intel Xeon processor E5440,  
2.83 GHz

SPECint\_rate2006 = 106

SPECint\_rate\_base2006 = 106

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Nov-2007

Hardware Availability: Dec-2007

Software Availability: Nov-2007

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	<b>558</b>	<b>140</b>	560	140	557	140	8	<b>558</b>	<b>140</b>	560	140	557	140
401.bzip2	8	807	95.6	792	97.5	<b>799</b>	<b>96.6</b>	8	807	95.6	792	97.5	<b>799</b>	<b>96.6</b>
403.gcc	8	681	94.5	679	94.8	<b>680</b>	<b>94.8</b>	8	681	94.5	679	94.8	<b>680</b>	<b>94.8</b>
429.mcf	8	<b>903</b>	<b>80.8</b>	904	80.7	902	80.8	8	<b>903</b>	<b>80.8</b>	904	80.7	902	80.8
445.gobmk	8	<b>596</b>	<b>141</b>	598	140	594	141	8	<b>596</b>	<b>141</b>	598	140	594	141
456.hammer	8	643	116	<b>643</b>	<b>116</b>	643	116	8	643	116	<b>643</b>	<b>116</b>	643	116
458.sjeng	8	712	136	714	136	<b>713</b>	<b>136</b>	8	712	136	714	136	<b>713</b>	<b>136</b>
462.libquantum	8	3298	50.3	<b>3268</b>	<b>50.7</b>	3264	50.8	8	3298	50.3	<b>3268</b>	<b>50.7</b>	3264	50.8
464.h264ref	8	<b>756</b>	<b>234</b>	755	234	757	234	8	<b>756</b>	<b>234</b>	755	234	757	234
471.omnetpp	8	<b>703</b>	<b>71.2</b>	703	71.1	702	71.2	8	<b>703</b>	<b>71.2</b>	703	71.1	702	71.2
473.astar	8	707	79.5	707	79.4	<b>707</b>	<b>79.5</b>	8	707	79.5	707	79.4	<b>707</b>	<b>79.5</b>
483.xalancbmk	8	442	125	<b>442</b>	<b>125</b>	442	125	8	442	125	<b>442</b>	<b>125</b>	442	125

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

This result has been produced with binaries provided and compiled by Intel.

BIOS configuration:

Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable

For information about Fujitsu Siemens Computers please see:

<http://www.fujitsu-siemens.com>

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu Siemens Computers**

PRIMERGY RX200 S4, Intel Xeon processor E5440,  
2.83 GHz

**SPECint\_rate2006 = 106**

**SPECint\_rate\_base2006 = 106**

**CPU2006 license:** 22

**Test sponsor:** Fujitsu Siemens Computers

**Tested by:** Fujitsu Siemens Computers

**Test date:** Nov-2007

**Hardware Availability:** Dec-2007

**Software Availability:** Nov-2007

## Base Optimization Flags

C benchmarks:

`-fast -inline-calloc -opt-malloc-options=3`

C++ benchmarks:

`-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap`

## Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

## Peak Optimization Flags

C benchmarks:

`400.perlbench: basepeak = yes`

`401.bzip2: basepeak = yes`

`403.gcc: basepeak = yes`

`429.mcf: basepeak = yes`

`445.gobmk: basepeak = yes`

`456.hmmer: basepeak = yes`

`458.sjeng: basepeak = yes`

`462.libquantum: basepeak = yes`

`464.h264ref: basepeak = yes`

C++ benchmarks:

`471.omnetpp: basepeak = yes`

`473.astar: basepeak = yes`

`483.xalancbmk: basepeak = yes`



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

PRIMERGY RX200 S4, Intel Xeon processor E5440,  
2.83 GHz

**SPECint\_rate2006 = 106**

**SPECint\_rate\_base2006 = 106**

**CPU2006 license:** 22

**Test sponsor:** Fujitsu Siemens Computers

**Tested by:** Fujitsu Siemens Computers

**Test date:** Nov-2007

**Hardware Availability:** Dec-2007

**Software Availability:** Nov-2007

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.06.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.06.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 13:32:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 12 December 2007.